


Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QF 1


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 04/20/07		LJC 04/20/07
K	DRAWING UPDATE	JLZ 04/29/19'	HZW 04/29/19'	LJC 04/29/19'
L	DRAWING UPDATE	JLZ 06/01/19'		




- NOTES:
- Insulation material: PVC
Color: Grey
 - SPECIFICATION
 - Rating: 300V
 - Conductor Size: 28AWG or 30AWG.
 - Insulation resistance: 100MΩ/km min.
 - Operating temperature:-20°C~70°C.
 - APPLICATION
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.


4. Product Number Code
DS1057 - X X X X X-X
- Packing Specifications
 - 30.5: 30.5m/reel(100ft)
 - 61.0: 61.0m/reel(200ft)
(For Dark Grey Only)
 - 76.5: 76.5m/reel(250ft)
 - 153.0: 153m/reel(500ft)
 - 459.0: 459m/reel(1500ft)
 - Edge mark
 - R: Red mark
 - F: Flower mark
 - Wire diameter
 - 1: Ø0.100 (30AWG)
 - 2: Ø0.127 (28AWG)
 - 3: Ø0.090 (SPECIAL)
 - Wire AWG
 - 28: 28AWG
 - 30: 30AWG
 - T: SPECIAL
 - Cable color
 - A: Gray
 - S: Dark Grey
 - No. Of positions
 - 06: 6pin
 - 64: 64pin



Number	Dimensions			Max. conductor resistance DC 20°C Ω/m
	TP(mm)	W(mm)	Tolerance	
06	6.35	7.62	±0.30	Ø0.100<0.397
08	8.89	10.16	±0.30	
10	11.43	12.70	±0.30	
14	16.51	17.78	±0.30	
16	19.05	20.32	±0.30	
20	24.13	25.40	±0.30	
24	29.21	30.48	±0.30	Ø0.127<0.237
26	31.75	33.02	±0.30	
30	36.83	38.10	±0.30	
34	41.91	43.18	±0.40	
40	49.53	50.80	±0.40	
50	62.23	63.50	±0.40	
60	74.93	76.20	±0.40	
64	80.01	81.28	±0.40	

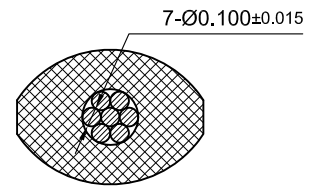

SECTION A-A (4:1)

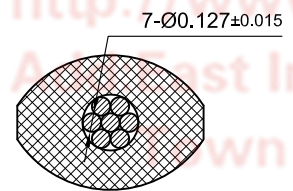

SECTION A-A (4:1)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1057-XXXXX-X-L		

PROJECTION		TITLE	2651 GRAY FLAT CABLE	
UNITS	mm	SHEET	A4	
SHEET SIZE	A4	SERIES	DS1057 SERIES	

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD