



DATA SHEET

Hall Effect Current Sensor

PN: CHB_AP15D50/100/125

IPN=50~200A

Feature

- Closed- loop (compensated) current transducer
- Capable measurement of currents: DC, AC, pulse with galvanic isolation between primary circuit and secondary circuit.
- Supply voltage: DC $\pm 9 \sim 15$ V

Advantages

- High accuracy
- Easy installation
- Low temperature drift
- Optimized response time
- Low power consumption
- High immunity to external interference
- Very good linearity
- Can be customized

Applications

- The application of induction cooker
- AC/DC variable-speed drive
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Inverter applications



RoHS



Electrical data: ($T_a=25^\circ\text{C}$, $V_c=\pm 15\text{VDC}$)

Ref Parmeter	CHB25 AP15D25	CHB50 AP15D50	CHB100 AP15D50	CHB125 AP15D125	CHB150 AP15D75	CHB200 AP15D100
Rated input Ipn(A)	25	50	100	125	150	200
Measuring range Ip(A)	0~±75	0~±150	0~±300	0~±375	0~±450	0~±600
Turns ratio Np/NS (T)	1:1000	1:1000	1:2000	1:1000	1:2000	1:2000
Output current rms IS(mA)	±25*IP/IPN	±50*IP/IPN	±50*IP/IPN	±125*IP/IPN	±75*IP/IPN	±100*IP/IPN
Secondary coil resistance RS (Ω)	30	30	50	30	50	50
Inside resistance RM (Ω)	[(VC-0.6V)/ (IS*0.001)]-RS					
Supply voltage VC(V)	(±9~±15) ±5%					
Accuracy XG(%)	@IPN,T=25°C		< ±0.5			
Offset current IOE(mA)	@IP=0,T=25°C		< ±0.2			
Temperature variation of IOE IOT(mA/°C)	@IP=0,-40 ~ +85°C		< ±0.005			
Linearity error εr(%FS)	< 0.1					
Di/dt accurately followed (A/μs)	> 100					
Response time tra(μs)	@90% of IPN		< 1.0			



Cheemi Technology Co., Ltd

Tel: 025-85996365

E-mail: info@cheemi-tech.com

www.cheemi-tech.com

Add: N22, Xianlongwan, Xianyin South Road, Qixia District, Nanjing - China.

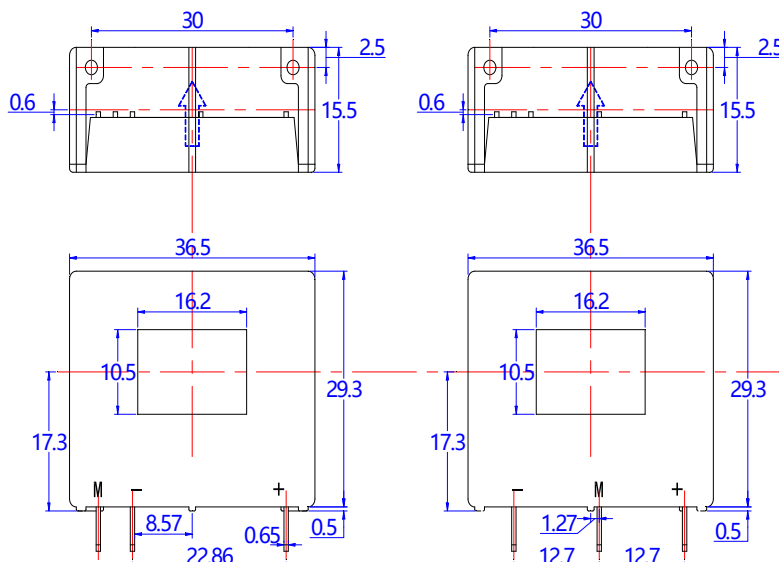
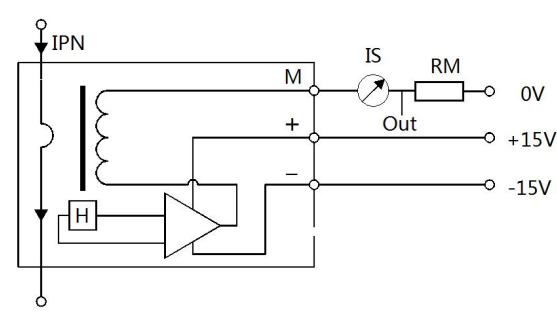
Cheemi Technology Co., Ltd

Power consumption IC(mA)		15+Is
Bandwidth BW(KHZ)	@-3dB,IPN	DC-200
Insulation voltage Vd(KV)	@50/60Hz, 1min,AC	3.0

General data:

Parameter	Value
Operating temperature TA(°C)	-40 ~ +85
Storage temperature TS(°C)	-55~ +125
Mass M(g)	21
Plastic material	PBT G30/G15, UL94- V0;
Standards	IEC60950-1:2001
	EN50178:1998
	SJ20790-2000

Dimensions(mm):

CHB-AP15D50/100	CHB125AP15D125	Connection
		
		General tolerance
		General tolerance: < ±0.5mm Primary through-hole: 10.5*16.2±0.15mm Secondary pin: 3pin 0.6*0.65

Remarks:

- When the current goes through the primary pin of a sensor, the voltage will be measured at the output end.
- Custom design is available for the different rated input current and the output voltage.
- The dynamic performance is the best when the primary hole is fully filled with.
- The primary conductor should be <100°C.

WARNING : Incorrect wiring may cause damage to the sensor.



Cheemi Technology Co., Ltd

Tel: 025-85996365

E-mail: info@cheemi-tech.com

www.cheemi-tech.com

Add: N22, Xianlongwan, Xianyin South Road, Qixia District, Nanjing - China.