

USER'S MANUAL



DC REGULATED POWER SUPPLY

BRIEF INTRODUCTION:

The HY10000E series variable DC power supplies are very stable, regulated DC power supplies allowing continuous adjustment of both the output voltage and output current levels.

MODELS:

HY10010E

REGULAR OUTPUT VOLTAGE: 0-100V

REGULAR OUTPUT CURRENT: 0-10A

1 TECHNICAL PARAMETER


- | | | |
|--|---|---|
| 1.1 Input voltage : | $230\text{VAC} \pm 10\%$ | $50\text{Hz} \pm 2\text{Hz}$ |
| 1.2 Line regulation : | $\text{CV} \leq 0.02\% + 3\text{mV}$ | $\text{CC} \leq 0.5\% + 3\text{mA}$ |
| 1.3 Load regulation : | $\text{CV} \leq 0.02\% + 10\text{mV} (I \leq 6\text{A})$
$\text{CV} \leq 0.1\% + 5\text{mV} (I > 6\text{A})$ | $\text{CC} \leq 0.5\% + 10\text{mA} (I \leq 6\text{A})$
$\text{CC} \leq 0.5\% + 20\text{mA} (I > 6\text{A})$ |
| 1.4 Ripple and noises : | $\text{CV} \leq 30\text{mV r.m.s max}$ | $\text{CC} \leq 60\text{mA r.m.s}$ |
| 1.5 Display: 2 LED | | |
| 1.6 Protection : constant current protection | | |
| 1.7 Voltage indication accuracy : | $\pm 1\% + 2\text{digits}$ | |
| 1.8 Current indication accuracy : | $\pm 2\% + 2\text{digits}$ | |

1.9 Environment : 0 ~+40 °C relative humidity : <90%

2 OPERATION

2.1 Front panel controls.

- (1) Current indication.
- (2) Voltage indication.
- (3) Fine adjustment of current
- (4) Coarse adjustment of current.
- (5) Fine adjustment of output voltage.
- (6) Coarse adjustment of output voltage.
- (7) Power ON/OFF switch
- (8) Negative output terminal.
- (9) Ground connection.
- (10) Positive output terminal
- (11) Constant current mode indicator
- (12) Constant voltage mode indicator

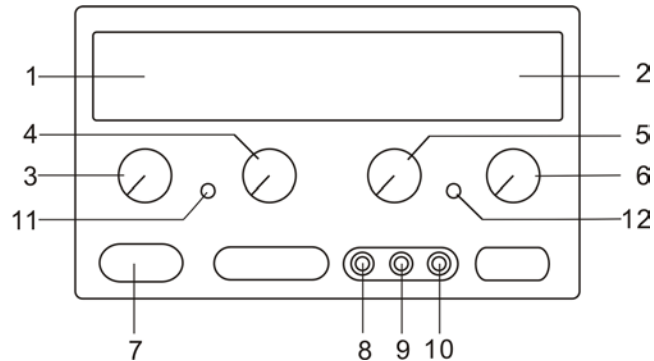

2.2 OPERATING PROCEDURE

2.2.1 For constant voltage mode adjust controls 3 & 4 clockwise to the maximum position. Switch on the power ON/OFF switch 7 and adjust controls 5 & 6 to set the desired output voltage. Connect

the load to the output terminals 8 & 10.

2.2.2 For constant current mode adjust controls 5 & 6 clockwise to the maximum position. Adjust controls 3 & 4 anti-clockwise to the minimum position. Switch on the power ON/OFF switch 7 and connect the load to the output terminals 8 & 10. Adjust controls 3 & 4 to set the desired output current.

2.2.3 For restricted current protection mode switch on the power ON/OFF switch 7, adjust controls 3 & 4 anti-clockwise to the minimum position, adjust controls 5 & 6 clockwise to set the desired output voltage level and then connect the load to the output terminals 8 & 10. Adjust controls 3 & 4 clockwise to set the output current at the desired level for restricted current protection.



3. ATTENTION:

3.1 In the event of a short circuit at the output the current will limit at the value set by the current controls, however the unit should be turned off and the short circuit removed before continuing use.

3.2 The mains power must be switched off before servicing and servicing should be referred to a qualified person.

3.3 The unit should be stored in a dry and well ventilated place and the power cord removed if storing for long periods.

4 ACCESSORIES

4.1 Power cord-----one piece

4.2 Instruction manual-----one piece