



R19L

Индикатор неон.
в корп.
220 В



B17440

Вкл. на шину
250 В, 3 А




88-15-100-01

250 В, 15 А

88-10-100-03


250 В, 10 А
Сетев. выкл.
с защелкой



SPA-115


Термостат 220 В,
25 А

Рабочая темп.:
-60...+150°C
Точность: ±5°C
Долговеч.: мин.
1000 циклов



SPA-117

Таймер 15 мин
250 В, 6,5 А
Долговечность:
мин. 5000 циклов




PWS-209

Перекл. код.
дв./дес.
28 В, 0.1 А


CODE NO. 2

	0	1	2	3	4	5	6	7	8
0	●	●	●	●	●	●	●	●	●
1	●	●	●	●	●	●	●	●	●
2	●	●	●	●	●	●	●	●	●
3	●	●	●	●	●	●	●	●	●
4	●	●	●	●	●	●	●	●	●
5	●	●	●	●	●	●	●	●	●
6	●	●	●	●	●	●	●	●	●
7	●	●	●	●	●	●	●	●	●
8	●	●	●	●	●	●	●	●	●



SP86-B1-9-2

Переключатель
с индикацией
Один светодиод
24 В, 0.05 А

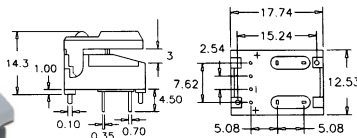

SP86-B2-9-2/3

Переключатель
с индикацией
Два светодиода
24 В, 0.05 А
желтый/зеленый

