

Features

- Gain-bandwidth Product: 20MHz
- Offset Voltage: 50 μ V (max)
- Low Noise: 7.3nV/ $\sqrt{\text{Hz}}$ (f= 1kHz)
- Slew Rate: 25 V/ μ s
- Low THD+N: 0.0005%
- Supply Range: 2.2V to 5.5V
- Supply Current: 3.5 mA/ch
- Low Input Bias Current: 0.3pA Typical
- Rail-to-Rail I/O
- High Output Current: 70mA (1.0V Drop)
- -40°C to 125°C Operation Range

Description

The TP2301 series products are very high precision amplifiers featuring very low noise, low offset voltage, high bandwidth, low input bias current and low temperature drift making them the ideal choice for applications requiring both high DC accuracy and AC performance. The combination of precision, low noise, and high bandwidth provides the user with outstanding value and flexibility relative to similar competitive parts.


Applications for these amplifiers include precision active filters, medical and analytical instrumentation, precision power supply controls, and industrial controls requiring high gains. Featuring low THD+N, the TP2301 series is also excellent for consumer audio applications, particularly for single-supply systems.

The TP2301 is single channel version available in 8-pin SOIC and 5-pin SOT23 packages. The TP2302 is dual channel version available in 8-pin SOIC and MSOP packages. The TP2304 is quad channel version available in 14-pin SOIC and TSSOP packages.


Applications

- Sensor Signal Conditioning
- Consumer Audio
- Multi-Pole Active Filters
- Control-Loop Amplifiers
- Communications
- Security
- Scanners

Pin Configuration (Top View)

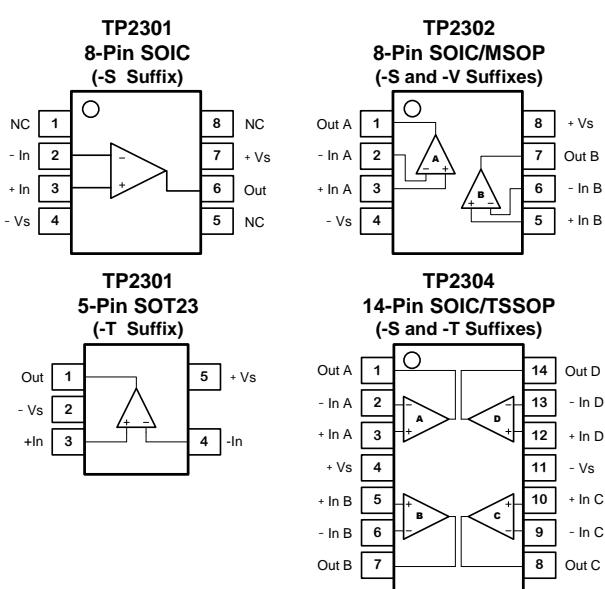

Positive Output Swing vs. Load Current

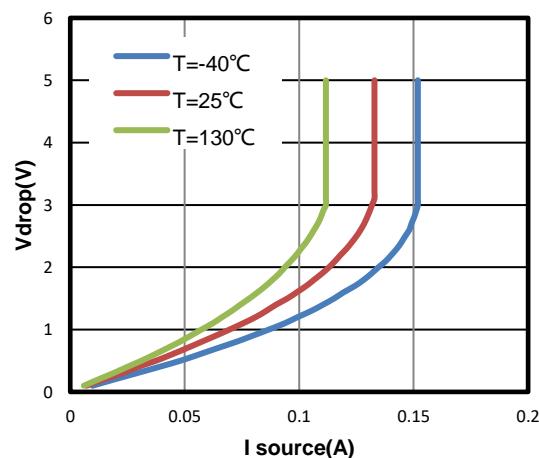

TP2301 / TP2302 / TP2304

20MHz Bandwidth, Low Noise High Precision Op-amps

Order Information

Model Name	Order Number	Package	Transport Media, Quantity	Marking Information
TP2301	TP2301-TR	5-Pin SOT23	Tape and Reel, 3,000	301
TP2302	TP2302-SR	8-Pin SOIC	Tape and Reel, 4,000	TP2302
	TP2302-VR	8-Pin MSOP	Tape and Reel, 3,000	TP2302
TP2304	TP2304-SR ^{Note 1}	14-Pin SOIC	Tape and Reel, 2,500	TP2304
	TP2304-TR ^{Note 1}	14-Pin TSSOP	Tape and Reel, 3,000	TP2304

Note 1: Future product, contact 3PEAK factory for more information and sample.

Absolute Maximum Ratings ^{Note 1}

Supply Voltage: $V^+ - V^-$ ^{Note 2} 7.0V
Input Voltage $V^- - 0.3$ to $V^+ + 0.3$
Input Current: $+IN, -IN$ ^{Note 3} ± 20 mA
Output Current: OUT ± 160 mA
Output Short-Circuit Duration ^{Note 4} Infinite

Current at Supply Pins ± 60 mA
Operating Temperature Range $-40^\circ C$ to $125^\circ C$
Maximum Junction Temperature $150^\circ C$
Storage Temperature Range $-65^\circ C$ to $150^\circ C$
Lead Temperature (Soldering, 10 sec) $260^\circ C$

Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 2: The op amp supplies must be established simultaneously, with, or before, the application of any input signals.

Note 3: The inputs are protected by ESD protection diodes to each power supply. If the input extends more than 500mV beyond the power supply, the input current should be limited to less than 10mA.

Note 4: A heat sink may be required to keep the junction temperature below the absolute maximum. This depends on the power supply voltage and how many amplifiers are shorted. Thermal resistance varies with the amount of PC board metal connected to the package. The specified values are for short traces connected to the leads.

ESD, Electrostatic Discharge Protection

Symbol	Parameter	Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001	6	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002	2	kV

Thermal Resistance

Package Type	θ_{JA}	θ_{JC}	Unit
5-Pin SOT23	250	81	$^\circ C/W$
8-Pin SOIC	158	43	$^\circ C/W$
8-Pin MSOP	210	45	$^\circ C/W$
14-Pin SOIC	120	36	$^\circ C/W$
14-Pin TSSOP	180	35	$^\circ C/W$

Electrical Characteristics

20MHz Bandwidth, Low Noise High Precision Op-amps

The specifications are at $T_A = 27^\circ\text{C}$, $V_S = +2.2\text{ V}$ to $+5.5\text{ V}$, or $\pm 1.1\text{ V}$ to $\pm 2.75\text{ V}$, $R_L = 2\text{k}\Omega$, $C_L = 100\text{pF}$. Unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage	$V_{CM} = V_{DD}/2$	-50	± 7	+50	μV
$V_{OS\text{ TC}}$	Input Offset Voltage Drift	-40°C to 125°C		1	2	$\mu\text{V}/^\circ\text{C}$
I_B	Input Bias Current	$T_A = 27^\circ\text{C}$		0.3		pA
		$T_A = 85^\circ\text{C}$		150		pA
		$T_A = 125^\circ\text{C}$		300		pA
I_{OS}	Input Offset Current			0.001		pA
V_n	Input Voltage Noise	$f = 0.1\text{Hz}$ to 10Hz		2.0		μV_{PP}
e_n	Input Voltage Noise Density	$f = 1\text{kHz}$		7.3		$\text{nV}/\sqrt{\text{Hz}}$
i_n	Input Current Noise	$f = 1\text{kHz}$		2		$\text{fA}/\sqrt{\text{Hz}}$
C_{IN}	Input Capacitance	Differential Common Mode		7.76 6.87		pF
CMRR	Common Mode Rejection Ratio	$V_{CM} = 2\text{V}$ to 3V	80	100		dB
V_{CM}	Common-mode Input Voltage Range		(V^-) - 0.3		(V^+) + 0.3	V
PSRR	Power Supply Rejection Ratio	$V_{CM} = 2.5\text{V}$, $V_S = 4\text{V}$ to 5V	80	100		dB
A_{VOL}	Open-Loop Large Signal Gain	$R_{LOAD} = 2\text{k}\Omega$	100	130		dB
V_{OL}, V_{OH}	Output Swing from Supply Rail	$R_{LOAD} = 2\text{k}\Omega$		20	50	mV
R_{OUT}	Closed-Loop Output Impedance	$G = 1$, $f = 1\text{MHz}$, $I_{OUT} = 0$		0.043		Ω
R_o	Open-Loop Output Impedance	$f = 1\text{kHz}$, $I_{OUT} = 0$		125		Ω
I_{SC}	Output Short-Circuit Current	Sink or source current	100	130	200	mA
V_{DD}	Supply Voltage		2.2		5.5	V
I_Q	Quiescent Current per Amplifier	$TP2301$, $V_{DD} = 5\text{V}$		5	9	mA
		$TP2302/TP2304$, $V_{DD} = 5\text{V}$		3.5	5	mA
PM	Phase Margin	$R_{LOAD} = 1\text{k}\Omega$, $C_{LOAD} = 60\text{pF}$		60		°
GM	Gain Margin	$R_{LOAD} = 1\text{k}\Omega$, $C_{LOAD} = 60\text{pF}$		11		dB
GBWP	Gain-Bandwidth Product	$f = 1\text{kHz}$		20		MHz
SR	Slew Rate	$AV = 1$, $V_{OUT} = 1.5\text{V}$ to 3.5V , $C_{LOAD} = 60\text{pF}$, $R_{LOAD} = 1\text{k}\Omega$	15	25		$\text{V}/\mu\text{s}$
FPBW	Full Power Bandwidth Note 1			5.21		MHz
t_s	Settling Time, 0.1% Settling Time, 0.01%	$AV = -1$, 1V Step		0.29 0.45		μs
THD+N	Total Harmonic Distortion and Noise	$f = 1\text{kHz}$, $AV = 1$, $RL = 2\text{k}\Omega$, $V_{OUT} = 1\text{V}_{\text{p-p}}$		123		dB
X_{talk}	Channel Separation	$f = 1\text{kHz}$, $R_L = 2\text{k}\Omega$		110		dB

Note 1: Full power bandwidth is calculated from the slew rate $FPBW = SR/\pi \cdot V_{P-P}$


TP2301 / TP2302 / TP2304

20MHz Bandwidth, Low Noise High Precision Op-amps


Typical Performance Characteristics

$V_S = \pm 2.5V$, $V_{CM} = 0V$, $R_L = \text{Open}$, unless otherwise specified.


Offset Voltage Production Distribution

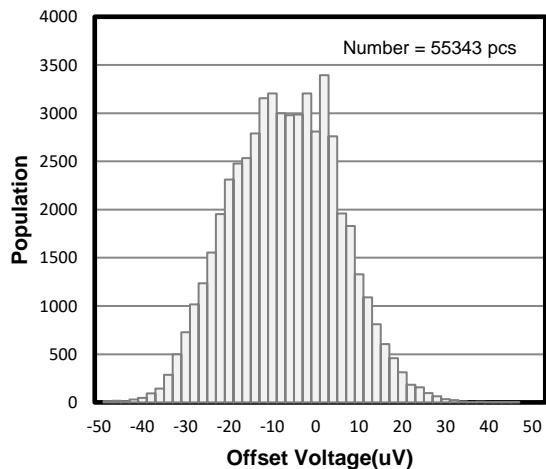


CMRR vs. Temperature

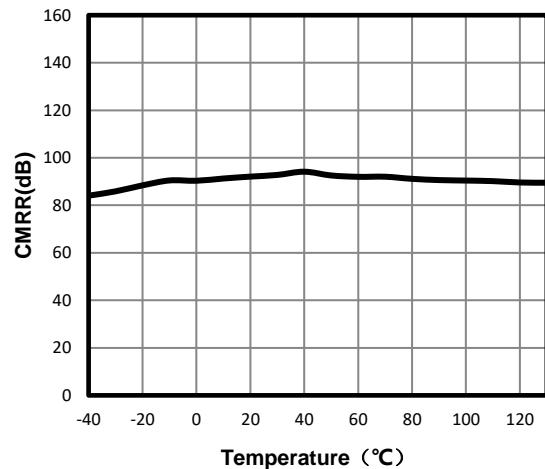


Open-Loop Gain and Phase

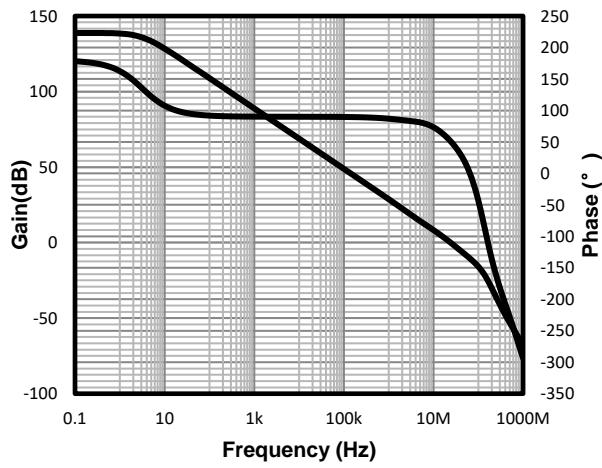


Input Voltage Noise Spectral Density

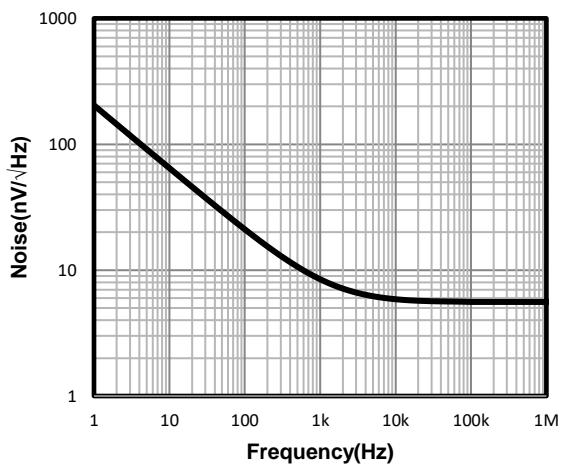

Input Bias Current vs. Temperature

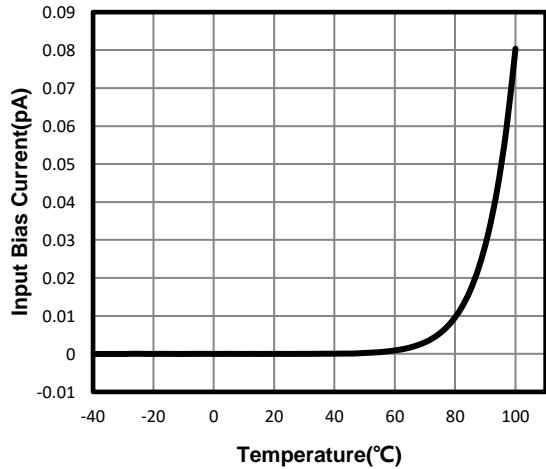

Input Bias Current vs. Input Common Mode Voltage

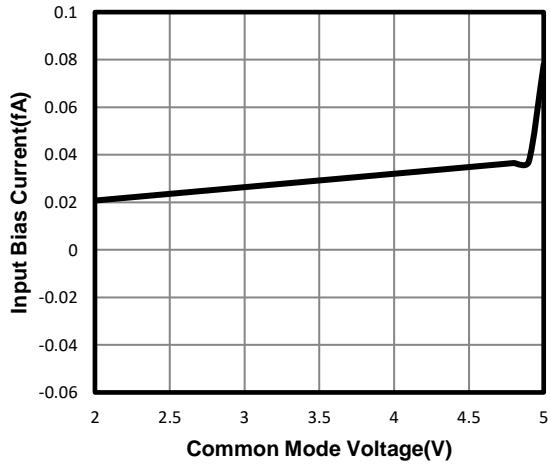


20MHz Bandwidth, Low Noise High Precision Op-amps


Typical Performance Characteristics

$V_S = \pm 2.5V$, $V_{CM} = 0V$, $R_L = \text{Open}$, unless otherwise specified. (Continued)


Common Mode Rejection Ratio

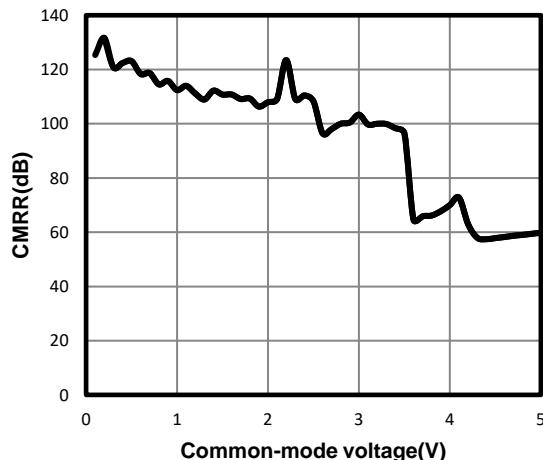


CMRR vs. Frequency

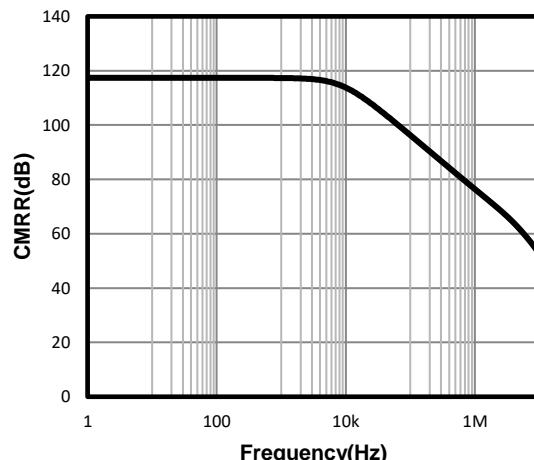


Quiescent Current vs. Temperature

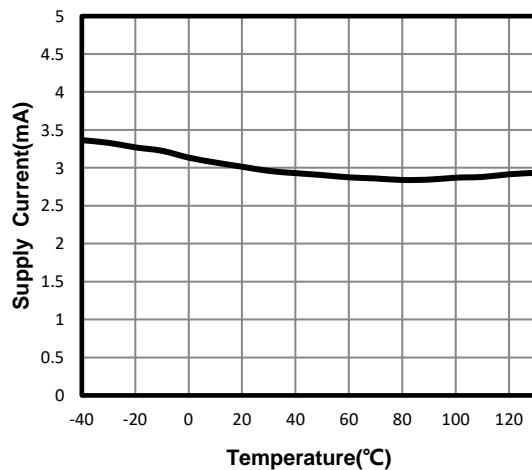


Short Circuit Current vs. Temperature

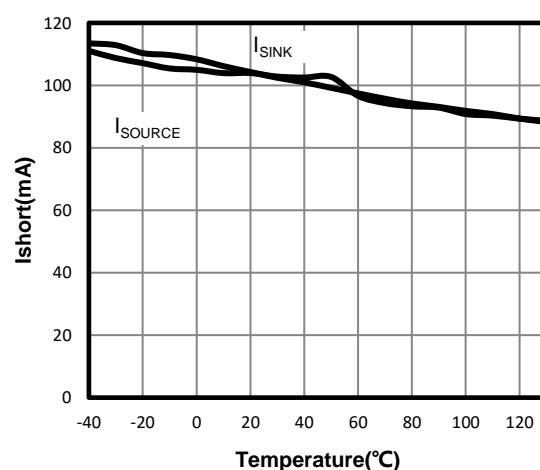

Power-Supply Rejection Ratio

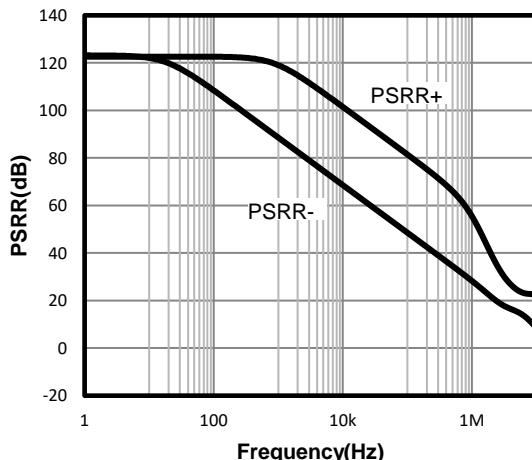


Quiescent Current vs. Supply Voltage

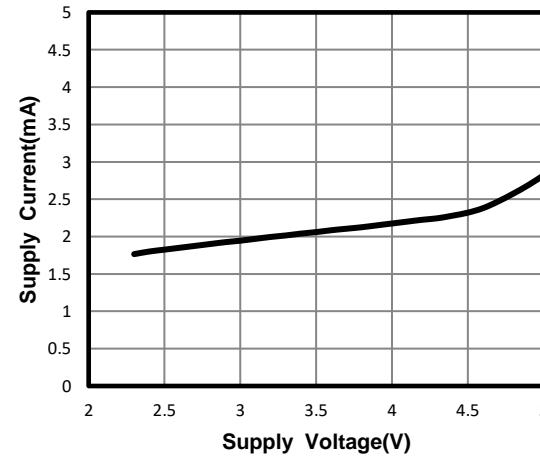


Typical Performance Characteristics

$V_S = \pm 2.5V$, $V_{CM} = 0V$, $R_L = \text{Open}$, unless otherwise specified. (Continued)


Power-Supply Rejection Ratio vs. Temperature

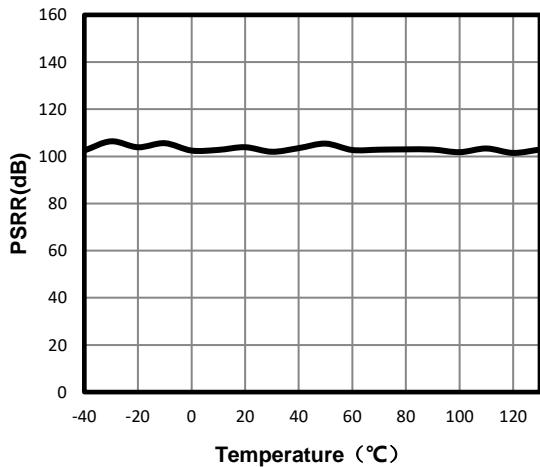


CMRR vs. Temperature

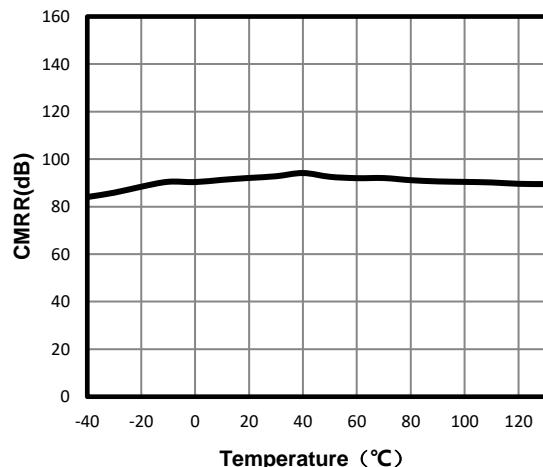


EMIRR IN+ vs. Frequency

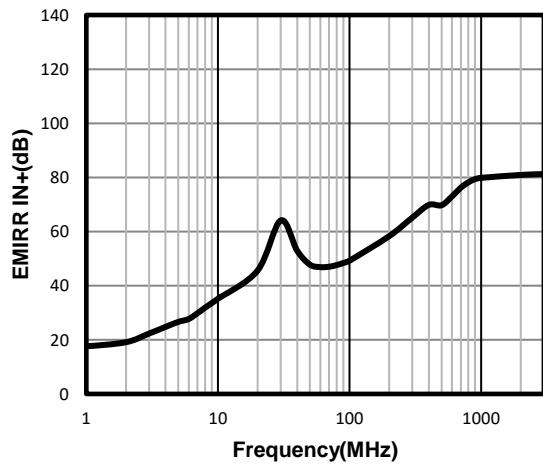


Large-Scale Step Response

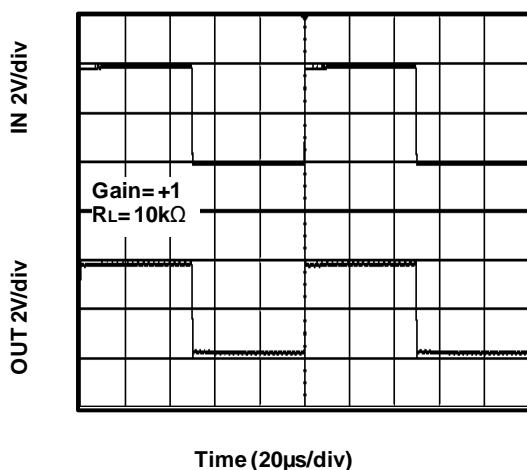

Negative Over-Voltage Recovery



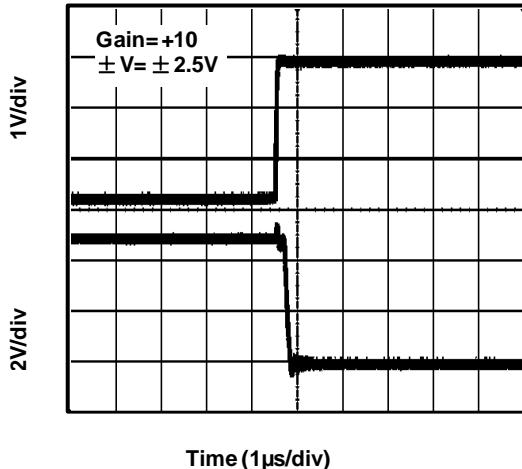


Positive Over-Voltage Recovery

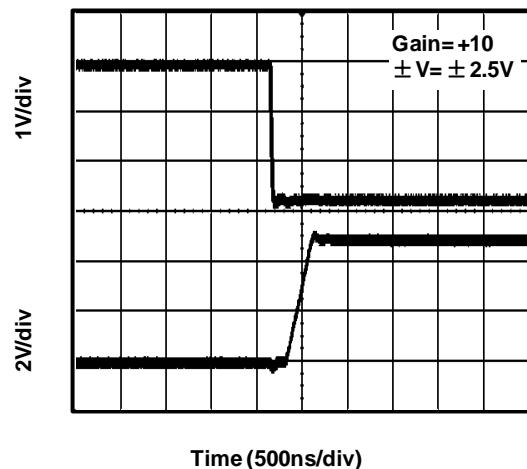

Typical Performance Characteristics

$V_S = \pm 2.5V$, $V_{CM} = 0V$, $R_L = \text{Open}$, unless otherwise specified. (Continued)

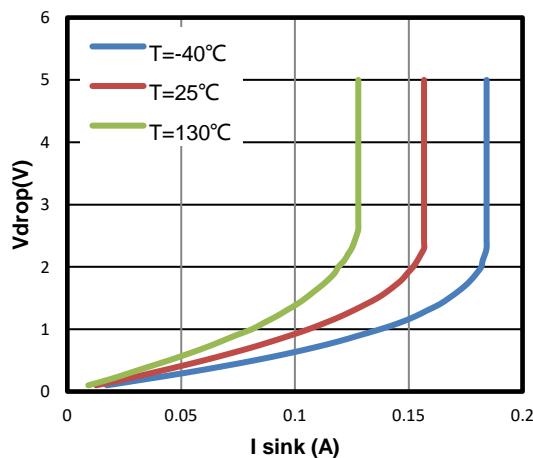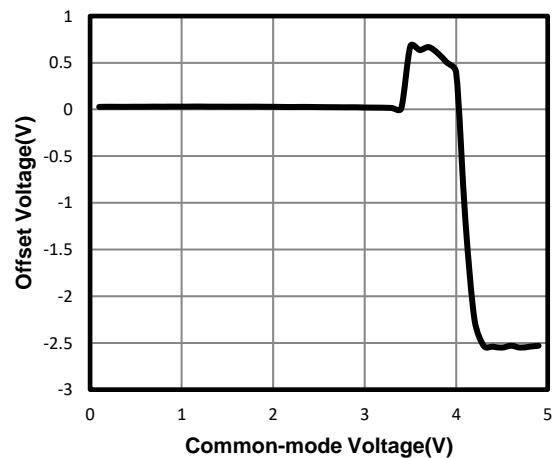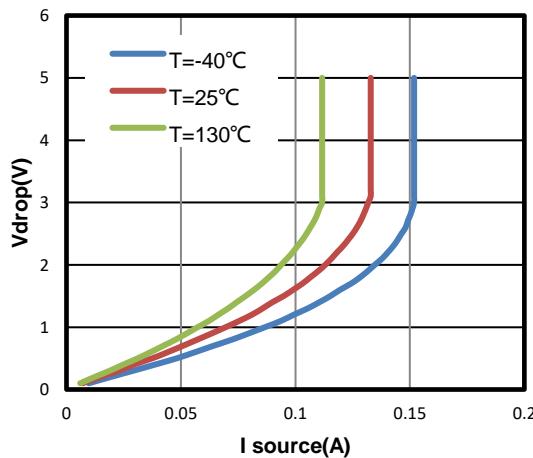
Negative Output Swing vs. Load Current**Offset Voltage vs. Common-Mode Voltage****Positive Output Swing vs. Load Current**

TP2301 / TP2302 / TP2304

20MHz Bandwidth, Low Noise High Precision Op-amps

Package Outline Dimensions


SOT23-5

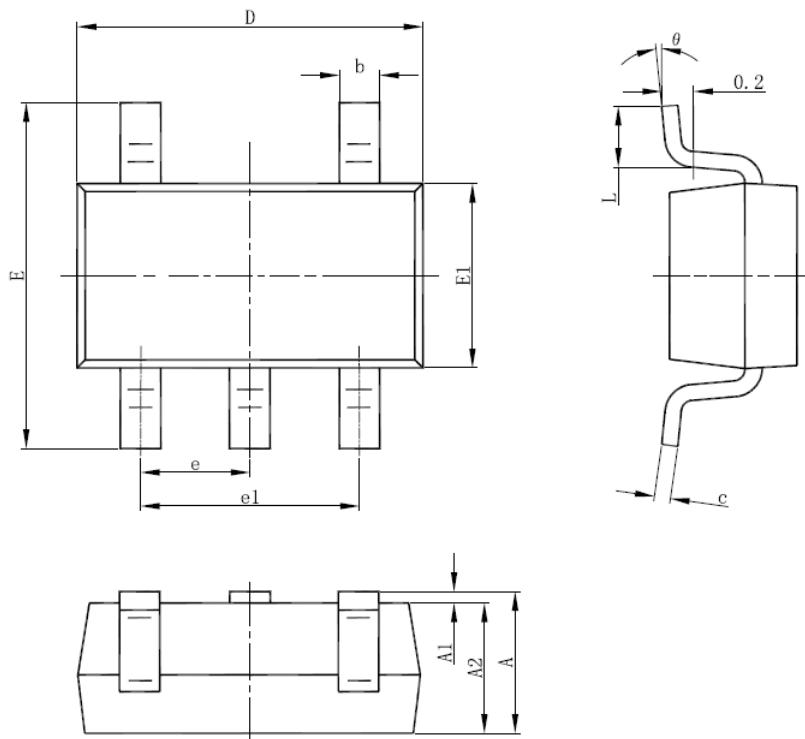

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E1	1.500	1.700	0.059	0.067
E	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

Package Outline Dimensions

SO-8 (SOIC-8)



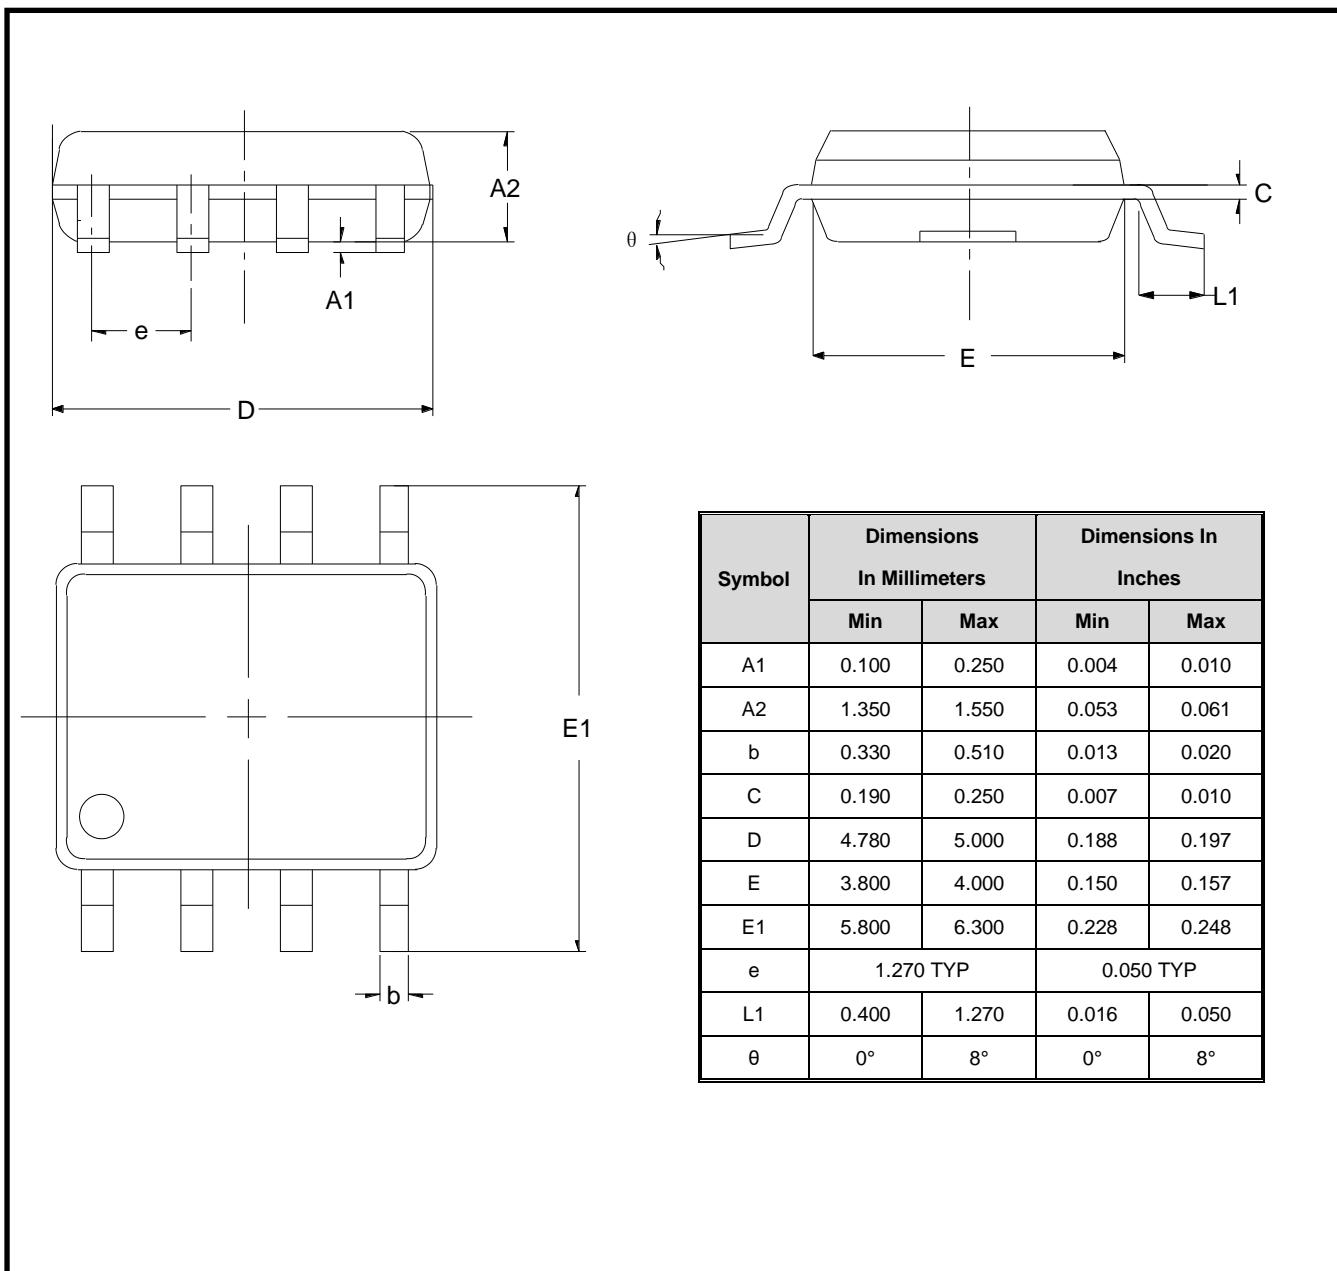


TP2301 / TP2302 / TP2304

20MHz Bandwidth, Low Noise High Precision Op-amps

Package Outline Dimensions


MSOP-8

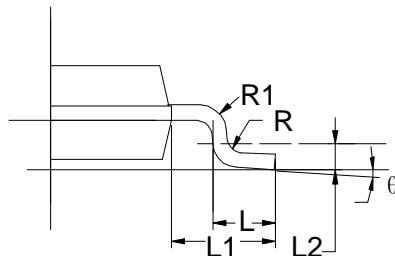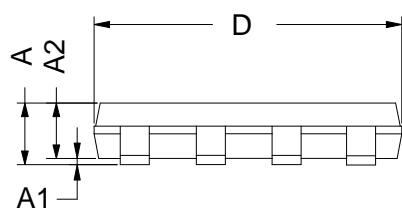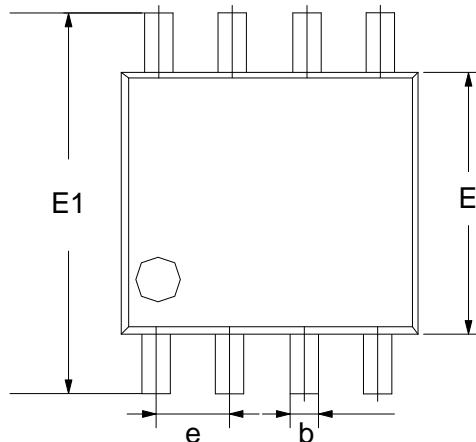

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.800	1.200	0.031	0.047
A1	0.000	0.200	0.000	0.008
A2	0.760	0.970	0.030	0.038
b	0.30 TYP		0.012 TYP	
C	0.15 TYP		0.006 TYP	
D	2.900	3.100	0.114	0.122
e	0.65 TYP		0.026	
E	2.900	3.100	0.114	0.122
E1	4.700	5.100	0.185	0.201
L1	0.410	0.650	0.016	0.026
θ	0°	6°	0°	6°

Package Outline Dimensions

TSSOP-14

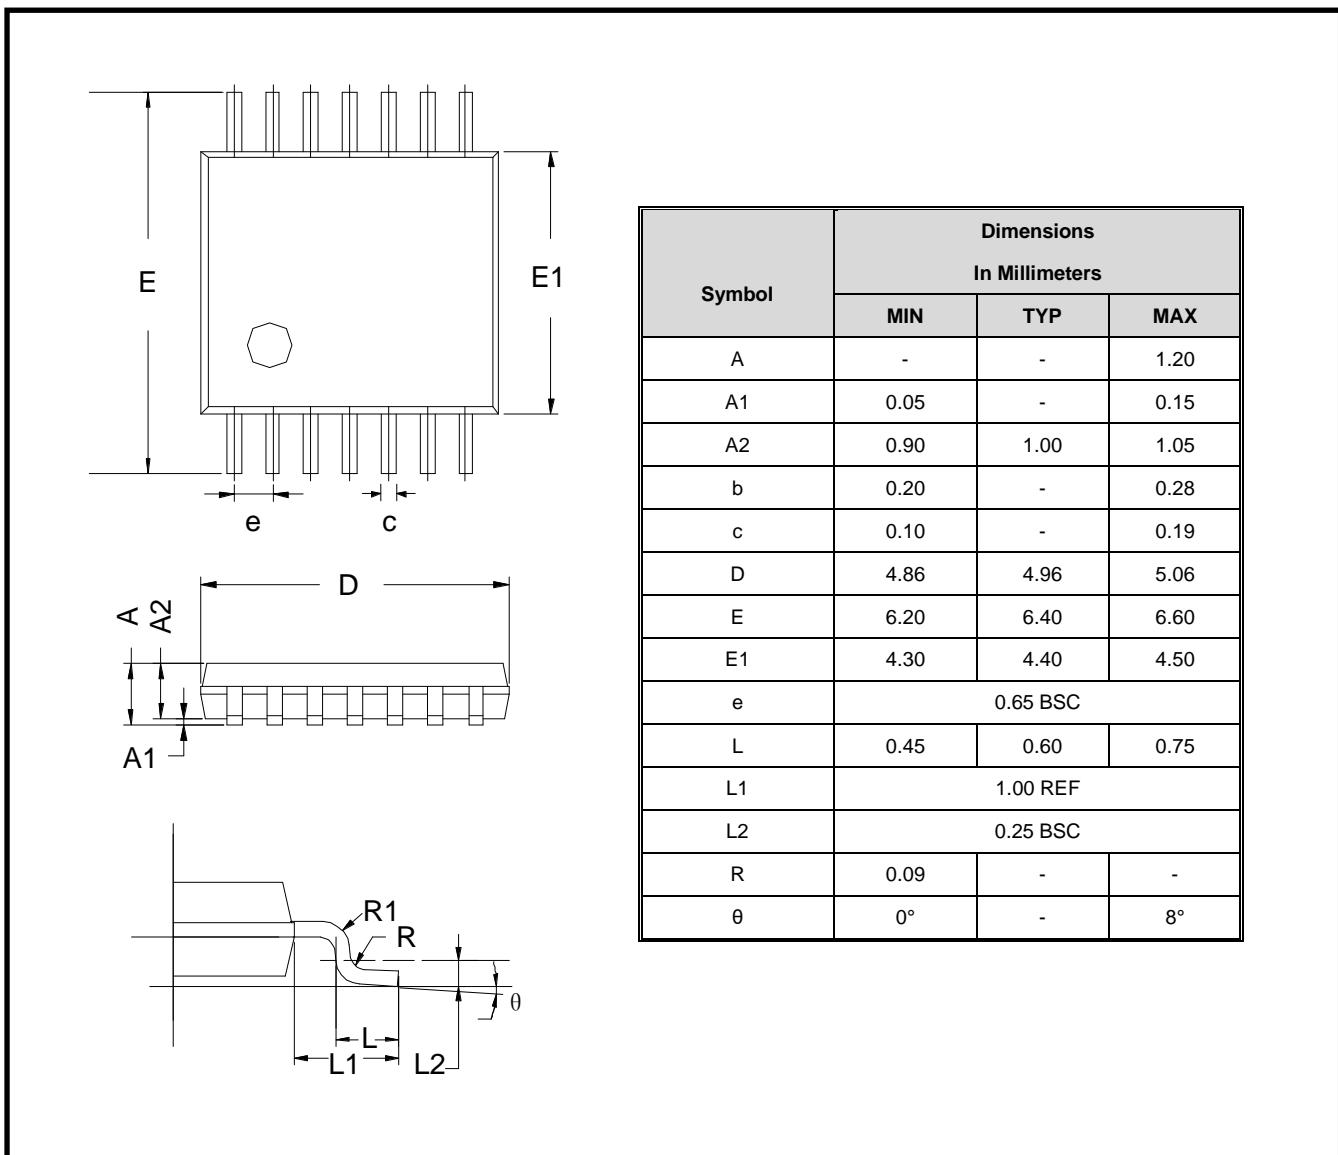


TP2301 / TP2302 / TP2304

20MHz Bandwidth, Low Noise High Precision Op-amps

Package Outline Dimensions

SO-14 (SOIC-14)

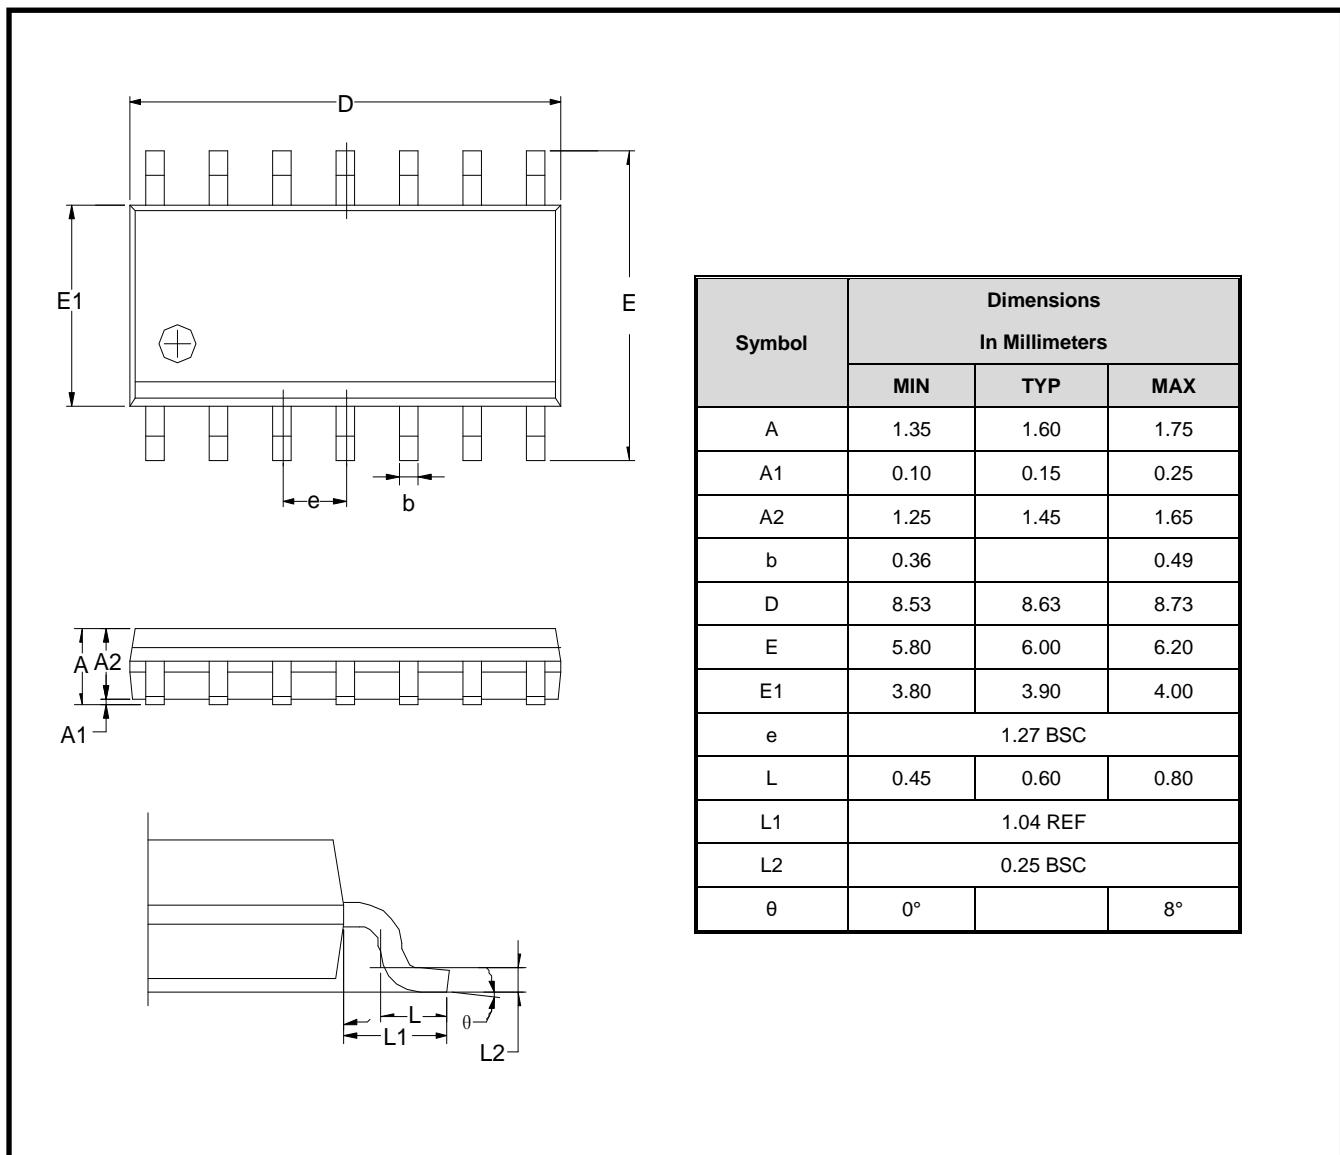

Revision History

Date	Revision	Notes
2022/4/29	A.4	<p>Update order information.</p> <p>Update EC table:</p> <p>VOL/VOH: typ 13mV -> 20mV; max 20mV -> 50mV</p> <p>Iq of TP2301(1ch): typ 5mA, max 9mA</p> <p>Slew Rate: min 18 -> 15</p>