


## Dual Differential Comparators

### DESCRIPTION

The LM393A consists of two independent voltage comparators. These were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage. The outputs can be connected to other open-collector outputs to achieve wired-AND relationships.

### FEATURES


- Wide supply voltage range
- Low supply current drain independent of the supply voltage.
- Low input biasing current
- Low input offset current
- Low input offset voltage
- Input common-mode voltage range includes GND
- Differential input voltage range equal to the power supply voltage
- Low output saturation voltage
- Output voltage compatible with TTL, MOS and CMOS logic

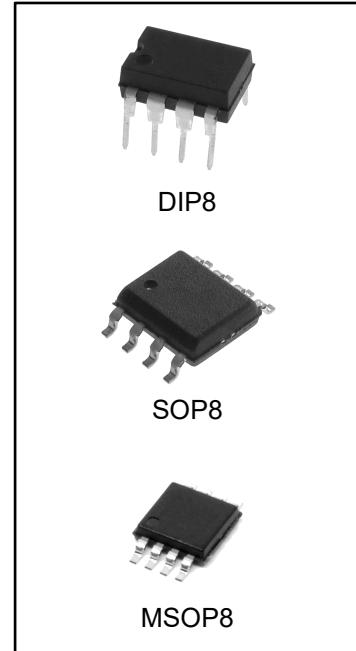

### ORDERING INFORMATION

DEVICE	PACKAGE TYPE	MARKING	PACKING	PACKING QTY
LM393AN	DIP8	LM393A	TUBE	2000 pcs/box
LM393AM	SOP8	LM393A	REEL	2500 pcs/reel
LM393AMM	MSOP8	LM393A	REEL	3000 pcs/reel

## PACKAGE INFORMATION

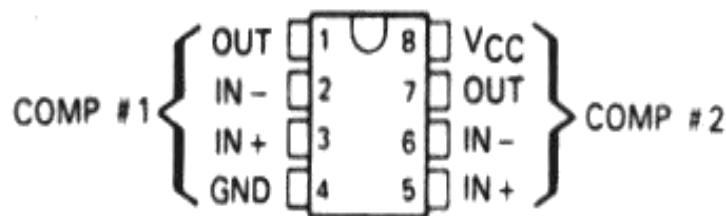

## ELECTRICAL CHARACTERISTICS

at specified free-air temperature,  $V_{cc}=5V$  (unless otherwise noted)

PARAMETER	TEST CONDITIONS*		MIN	TYP	MAX	UNIT	
V <sub>IO</sub> Input offset voltage	$V_{cc}=5V$ to 30V, $V_{ICR} = V_{ICRmin}$ , $V_o=1.4V$	25°C		2	5	mV	
		Full range			9		
I <sub>IO</sub> Input offset current	$V_o=1.4V$	25°C		5	50	nA	
		Full range			150		
I <sub>IB</sub> Input bias current	$V_o=1.4V$	25°C		-25	-250	nA	
		Full range			-400		
V <sub>ICR</sub> Common-mode input voltage range**		25°C	0 to $V_{cc}-1.5$			V	
		Full range	0 to $V_{cc}-2$				
AVD Large-signal differential voltage amplification	$V_{cc}=15V$ , $V_o=1.4V$ to 11.4V, $R_L \geq 15k\Omega$ to V <sub>CC</sub>	25°C	50	200		V/mV	
I <sub>OH</sub> High-level output current	VOH=5V, VID=1V,	25°C		0.1	50	nA	
	VOH=30V, VID=1V	Full range			1	µA	
V <sub>OL</sub> Low-level output voltage	I <sub>OL</sub> =4mA, VID=-1V	25°C		150	400	mV	
		Full range			700		
I <sub>OL</sub> Low-level output current	V <sub>OL</sub> =1.5V, VID=-1V	25°C	6			mA	
I <sub>CC</sub> Supply current	$R_L=\infty$	V <sub>CC</sub> =5V	25°C		0.8	1	mA
		V <sub>CC</sub> =30V	Full range			2.5	

\*Full range (MIN to MAX), for the LM393A is -40°C to 85°C. All characteristics are measured with zero common-mode input voltage unless otherwise specified.

\*\*The voltage at either input or common-mode should not be allowed to go negative by more than 0.3V. The upper end of the common-mode voltage range is  $V_{CC}-1.5V$ , but either or both inputs can go to 30V without damage.

## SWITCHING CHARACTERISTICS, $V_{CC}=5V$ , $TA=25^\circ C$


PARAMETER	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Response time	$R_L$ connected to 5V through 5.1k , $CL=15pF^*$ (See Note 1)	MV input step with 5-mV overdrive		1.3		µs
		TTL-level input step		0.3		

\* $CL$  includes probe and jig capacitance.

NOTE 1: The response time specified is the interval between the input step function and the instant, when the output crosses 1.4V.



## Physical Dimensions

SOP8

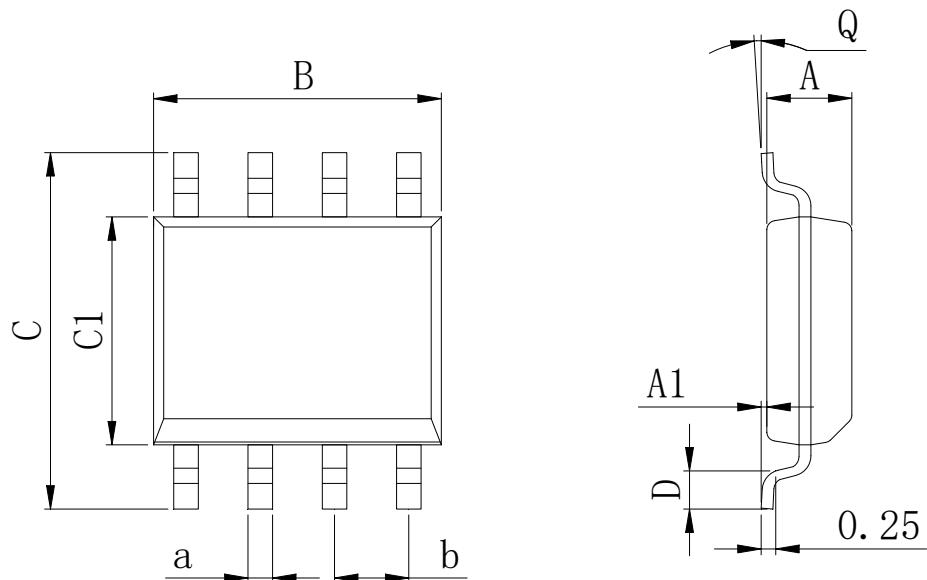

Dimensions In Millimeters(SOP8)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	4.90	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	5.10	6.20	4.00	0.80	8°	0.45	


DIP8

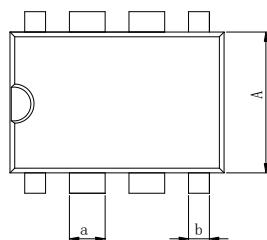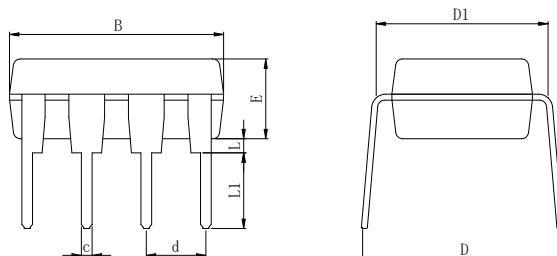

Dimensions In Millimeters(DIP8)												
Symbol:	A	B	D	D1	E	L	L1	a	b	c	d	
Min:	6.10	9.00	8.40	7.42	3.10	0.50	3.00	1.50	0.85	0.40	2.54 BSC	
Max:	6.68	9.50	9.00	7.82	3.55	0.70	3.60	1.55	0.90	0.50		

## Physical Dimensions

MSOP8

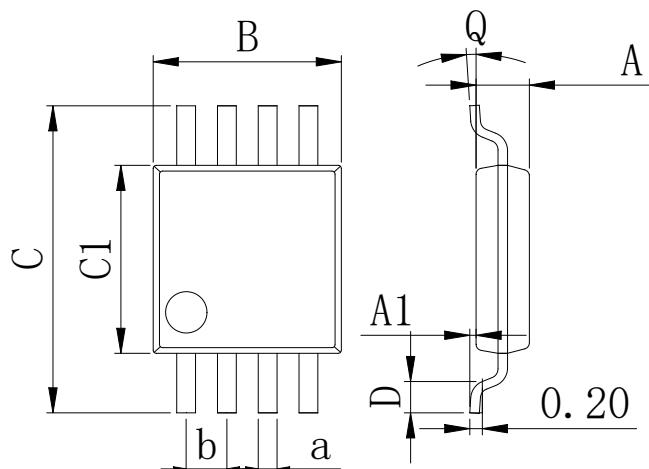

Dimensions In Millimeters(MSOP8L)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	0.80	0.05	2.90	4.75	2.90	0.35	0°	0.25	0.65 BSC
Max:	0.90	0.20	3.10	5.05	3.10	0.75	8°	0.35	