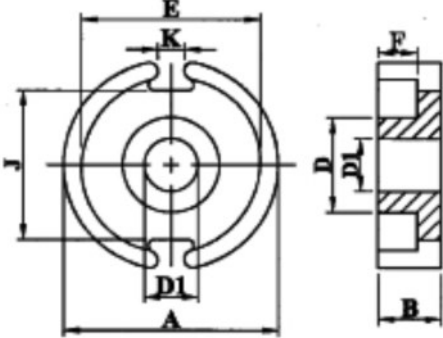


越峰電子材料股份有限公司 ACME Electronics Corporation			規格狀態(Spec situation) 暫規																																																																										
客戶特殊規格書 (Customer Specification)	品名: (Part No.)	客戶名稱 (Customer)	生效日期(Effective Date) 2023/11/14																																																																										
	F52POT7.4*7CH	客戶料號(Customer P/N)	客戶圖紙號(Customer revision No.)																																																																										
圖紙面型(Drawing)																																																																													
 E-CORE尺寸規格:Dimensions(mm) <table><tr><td>A</td><td>B</td><td>D</td><td>D1</td><td>E</td><td>F</td><td>K</td><td>J</td></tr><tr><td>7.50+0/-0.20</td><td>3.50+0.10/-0.05</td><td>2.40+0/-0.20</td><td>1.20±0.10</td><td>5.75+0.25/-0</td><td>2.80±0.10</td><td>2.00+0.30/-0</td><td>4.00±0.10</td></tr></table> <table><tr><td>Ae</td><td>Le</td></tr><tr><td>3.88mm²</td><td>11.69mm</td></tr></table> 電磁特性規格 (Electrical Characteristics): <table><tr><td>材質</td><td>初導磁率</td><td>電感係數</td></tr><tr><td>(Material)</td><td>μ i</td><td>AL(nH/N²)</td></tr><tr><td>F52</td><td>500±25%</td><td>125±25%</td></tr></table> 測試條件(Testing Method): <table><tr><td>測試條件 (Condition)</td><td>100KHz/100mV</td></tr><tr><td>測試儀器 (Equipment)</td><td>卡尺/高度規</td></tr><tr><td>測試溫度 (Temperature)</td><td>室溫(25℃±3℃)</td></tr><tr><td>線圈(Winding)</td><td>φ0.25mm/10Ts</td></tr></table> 其它規定 (Others): 1.自繞線包(Handmade coil). <table><tr><td>版本 (Revision)</td><td>修訂內容說明 (Description)</td><td>日期 (Date)</td></tr><tr><td>1</td><td>新制</td><td>2023/11/14</td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></table>					A	B	D	D1	E	F	K	J	7.50+0/-0.20	3.50+0.10/-0.05	2.40+0/-0.20	1.20±0.10	5.75+0.25/-0	2.80±0.10	2.00+0.30/-0	4.00±0.10	Ae	Le	3.88mm²	11.69mm	材質	初導磁率	電感係數	(Material)	μ i	AL(nH/N²)	F52	500±25%	125±25%	測試條件 (Condition)	100KHz/100mV	測試儀器 (Equipment)	卡尺/高度規	測試溫度 (Temperature)	室溫(25℃±3℃)	線圈(Winding)	φ0.25mm/10Ts	版本 (Revision)	修訂內容說明 (Description)	日期 (Date)	1	新制	2023/11/14																														
A	B	D	D1	E	F	K	J																																																																						
7.50+0/-0.20	3.50+0.10/-0.05	2.40+0/-0.20	1.20±0.10	5.75+0.25/-0	2.80±0.10	2.00+0.30/-0	4.00±0.10																																																																						
Ae	Le																																																																												
3.88mm²	11.69mm																																																																												
材質	初導磁率	電感係數																																																																											
(Material)	μ i	AL(nH/N²)																																																																											
F52	500±25%	125±25%																																																																											
測試條件 (Condition)	100KHz/100mV																																																																												
測試儀器 (Equipment)	卡尺/高度規																																																																												
測試溫度 (Temperature)	室溫(25℃±3℃)																																																																												
線圈(Winding)	φ0.25mm/10Ts																																																																												
版本 (Revision)	修訂內容說明 (Description)	日期 (Date)																																																																											
1	新制	2023/11/14																																																																											
核准(Approve): 林秉翰	審查(Check):	制定(Prepared By): 石超希	頁次(Page):1/1 工廠GZ																																																																										