

申請單號：



ACME Electronics Corporation
越峰電子材料股份有限公司

規格書名稱/Specifications :P41EE42A


客戶料號/Customer P/N：

一、形狀、尺寸、材質/Shape, dimensions & material：

(1)形狀、尺寸：如下圖所示(單位：mm)Shape & dimensions：

(2)材質Material：P41

圖例/Drawing：

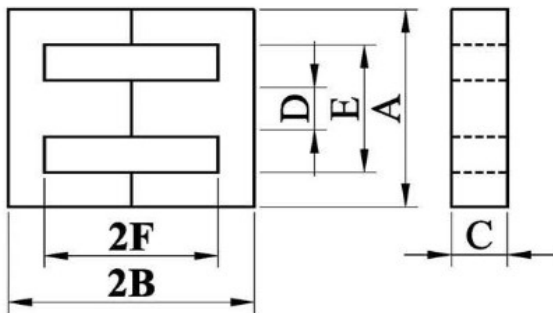

尺寸規格/Dimensions：

A：	42.15±0.85
B：	21.2±0.20
C：	14.85±0.30
D：	11.85±0.35
E：	29.5min
F：	15.1±0.30

Ae:	178.00mm ²
Le:	97.60mm
Ve:	17400.00mm ³
Wt:	89.40g/set

二、電磁特性規格 Electrical Characteristics：

材質 Material	初導磁率 μ_i Initial Permeability
P41	2400±25%

測試條件 Test Condition

測試項目 Item	單位 Units	測試條件 Test Condition	測試溫度 Temperature	規格 Spec	測試儀器 Equipment	測試線包 Test coil
AL	nH/N ²	10kHz,50mV	25℃±3℃	4900±25%	Calipers/HP4284A	0.25mm/10Ts(ACME)

AL value needs to be checked.

量測手法（選擇項目為”■ “）Test method(”■ “ means Yes)：

- ☒ 包麥拉帶2圈Wrap 2 layers of tape
- ☐ 客戶測試夾子Test with clip
- ☐ 至少對磨三次以上測試Abrad matching surface each other 3 times before testing the inductance
- ☐ 平面配GAP測試Test by nogap core and gapped core
- ☐ 雙GAP測試Test by pair of gapped cores
- ☐ GAP產品放置於引線端測試Place the gapped core at the test side and close to the bobbin before testing
- ☐ GAP產品放置於非引線端測試Place the nogap core at the test side and close to the bobbin before testing

注意事項: Remarks



AR01-60106-02