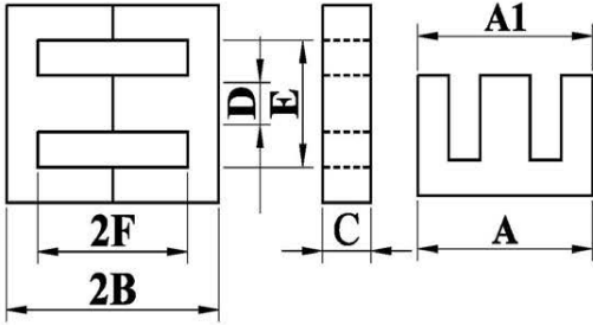


越峰電子材料股份有限公司 ACME Electronics Corporation			客戶規格編號(Customer Spec.No.)																																					
客戶特殊規格書 (Customer Specification)	品名: (Part No.) P41EEL25F	客戶名稱 (Customer)	生效日期(Effective Date)																																					
客戶料號(Customer Part No.):			版次(Version) 第一版																																					
 尺寸規格 Dimensions (mm) : <table><tr><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td><td>F</td></tr><tr><td>25+0.8/-0.7</td><td>12.55±0.25</td><td>7.20±0.30</td><td>7.25±0.25</td><td>17.80±0.30</td><td>8.95±0.25</td></tr></table> <table><tr><td>Ae</td><td>Le</td><td>Ve</td></tr><tr><td>52.5 mm2</td><td>57.5mm</td><td>3020 mm3</td></tr></table> 電磁特性規格 (Electrical Characteristics): 低鐵損材質 (Low loss Material) <table><tr><td>材質 (Material)</td><td>初導磁率 μi</td><td>電感(Inductance) AL(nH/N²)</td><td>Pv1(W)</td><td>Pv2(W)</td></tr><tr><td>P41</td><td>2400±25%</td><td>1850+30%/-20%</td><td>0.30 max</td><td>1.50max</td></tr></table> 測試條件(Testing Condition): <table><tr><td>測試條件 Condition</td><td>AL:10 kHz,50mV Pv1:100kHz,100mT Pv2:100kHz,200mT</td></tr><tr><td>測試儀器 Equipment</td><td>卡尺(callipers)/HP4284A</td></tr><tr><td>室溫 Temperature</td><td>AL:25°C±3°C Pv:100°C±3°C</td></tr><tr><td>線圈 COIL</td><td>0.25mm,10Ts(ACME)</td></tr></table> REMARK:					A	B	C	D	E	F	25+0.8/-0.7	12.55±0.25	7.20±0.30	7.25±0.25	17.80±0.30	8.95±0.25	Ae	Le	Ve	52.5 mm2	57.5mm	3020 mm3	材質 (Material)	初導磁率 μi	電感(Inductance) AL(nH/N²)	Pv1(W)	Pv2(W)	P41	2400±25%	1850+30%/-20%	0.30 max	1.50max	測試條件 Condition	AL:10 kHz,50mV Pv1:100kHz,100mT Pv2:100kHz,200mT	測試儀器 Equipment	卡尺(callipers)/HP4284A	室溫 Temperature	AL:25°C±3°C Pv:100°C±3°C	線圈 COIL	0.25mm,10Ts(ACME)
A	B	C	D	E	F																																			
25+0.8/-0.7	12.55±0.25	7.20±0.30	7.25±0.25	17.80±0.30	8.95±0.25																																			
Ae	Le	Ve																																						
52.5 mm2	57.5mm	3020 mm3																																						
材質 (Material)	初導磁率 μi	電感(Inductance) AL(nH/N²)	Pv1(W)	Pv2(W)																																				
P41	2400±25%	1850+30%/-20%	0.30 max	1.50max																																				
測試條件 Condition	AL:10 kHz,50mV Pv1:100kHz,100mT Pv2:100kHz,200mT																																							
測試儀器 Equipment	卡尺(callipers)/HP4284A																																							
室溫 Temperature	AL:25°C±3°C Pv:100°C±3°C																																							
線圈 COIL	0.25mm,10Ts(ACME)																																							
核准(Approved by):	審查(Checked by):	制定(Prepared by): Guoqi Tu	頁次(Page)1/1 KS																																					