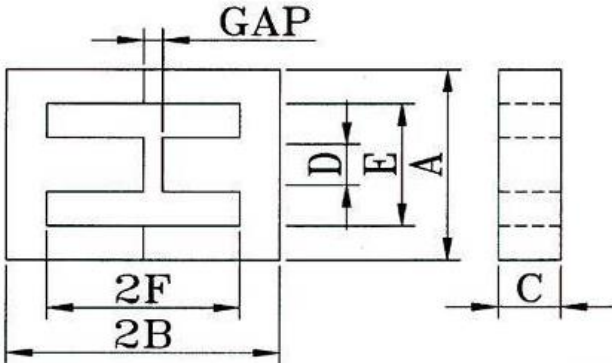


越峰電子材料股份有限公司 ACME Electronics Corporation			客戶規格編號(Customer Spec.No.)																																													
客戶特殊規格書 (Customer Specification)	品名: (Part No.) P41EF25G250	客戶名稱 (Customer)	生效日期(Effective Date)																																													
客戶料號(Customer Part No.):			版次 (Version) 第一版																																													
 外觀尺寸規格 Dimensions (mm) : <table><tr><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td><td>F</td><td>Gap</td></tr><tr><td>25.05±0.75</td><td>12.55±0.25</td><td>7.20±0.30</td><td>7.25±0.25</td><td>17.50min</td><td>8.95±0.25</td><td>0.25ref</td></tr><tr><td>Ae</td><td>Le</td><td>Ve</td><td colspan="4"></td></tr><tr><td>52.5mm²</td><td>57.5mm</td><td>3020mm³</td><td colspan="4"></td></tr></table> 電磁特性規格 (Electrical Characteristics): 低鐵損材質 (Low Loss Materials) <table><tr><td>材質 (Material)</td><td>初導磁率 μi</td><td>電感(Inductance) AL(nH/N²)</td></tr><tr><td>P41</td><td>2400±25%</td><td>250±4%</td></tr></table> 測試條件(Testing Condition): <table><tr><td></td><td>電感(Inductance)</td></tr><tr><td>測試條件 (Condition)</td><td>10kHz ,50mV</td></tr><tr><td>測試儀器</td><td>卡尺(Callipers)/HP4284A</td></tr><tr><td>(Temperature)</td><td>室溫(25℃±3℃)</td></tr><tr><td>線圈 (Winding)</td><td>0.25mm/10TS(ACME)</td></tr></table> REMARK:					A	B	C	D	E	F	Gap	25.05±0.75	12.55±0.25	7.20±0.30	7.25±0.25	17.50min	8.95±0.25	0.25ref	Ae	Le	Ve					52.5mm ²	57.5mm	3020mm ³					材質 (Material)	初導磁率 μi	電感(Inductance) AL(nH/N ²)	P41	2400±25%	250±4%		電感(Inductance)	測試條件 (Condition)	10kHz ,50mV	測試儀器	卡尺(Callipers)/HP4284A	(Temperature)	室溫(25℃±3℃)	線圈 (Winding)	0.25mm/10TS(ACME)
A	B	C	D	E	F	Gap																																										
25.05±0.75	12.55±0.25	7.20±0.30	7.25±0.25	17.50min	8.95±0.25	0.25ref																																										
Ae	Le	Ve																																														
52.5mm ²	57.5mm	3020mm ³																																														
材質 (Material)	初導磁率 μi	電感(Inductance) AL(nH/N ²)																																														
P41	2400±25%	250±4%																																														
	電感(Inductance)																																															
測試條件 (Condition)	10kHz ,50mV																																															
測試儀器	卡尺(Callipers)/HP4284A																																															
(Temperature)	室溫(25℃±3℃)																																															
線圈 (Winding)	0.25mm/10TS(ACME)																																															
核准(Approved by) :		審查(Checked by) :		制定(Prepared By) : Renjie Xiao	頁次(Page)1/1 KS																																											