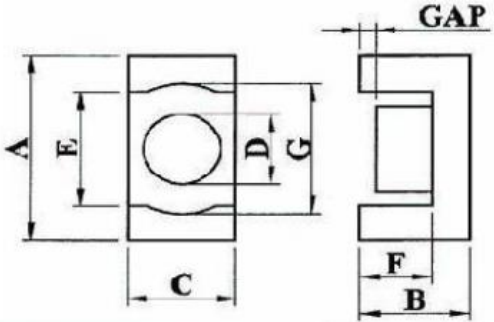


越峰電子材料股份有限公司 ACME Electronics Corporation			客戶規格編號(Customer Spec.No.)																																										
客戶特殊規格書 (Customer Specification)	品名: (Part No.) P41ER29.8B	客戶名稱 (Customer)	生效日期(Effective Date)																																										
客戶料號(Customer Part No.):			版次(Version) 第一版																																										
 尺寸規格 Dimensions (mm) : <table><tr><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td><td>F</td><td>G</td><td>GAP</td></tr><tr><td>29.80±0.80</td><td>15.80±0.20</td><td>9.50±03.0</td><td>9.50±0.30</td><td>20.40min</td><td>11.00±0.15</td><td>22.70±0.70</td><td>0.50±0.05</td></tr></table> <table><tr><td>Ae</td><td>Le</td><td>Ve</td></tr><tr><td>76.00mm²</td><td>70.40mm</td><td>5350mm³</td></tr></table> 電磁特性規格 (Electrical Characteristics): 低鐵損材質 (Low loss Material) <table><tr><td>材質 (Material)</td><td>初導磁率 μ i</td><td>電感(Inductance) AL(nH/N²)</td></tr><tr><td>P41</td><td>2400±25%</td><td>201±5%</td></tr></table> 測試條件(Testing Condition): <table><tr><td>測試條件 Condition</td><td>10kHz,50mV</td></tr><tr><td>測試儀器 Equipment</td><td>卡尺(callipers)/HP4284A</td></tr><tr><td>室溫 Temperature</td><td>25°C±3°C;</td></tr><tr><td>線圈 COIL</td><td>0.25mm,10Ts(ACME)</td></tr></table> REMARK: <table><tr><td>核准(Approved by):</td><td>審查(Checked by):</td><td>制定(Prepared by): Renjie Xiao</td><td colspan="2">頁次(Page)1/1 KS</td></tr></table>					A	B	C	D	E	F	G	GAP	29.80±0.80	15.80±0.20	9.50±03.0	9.50±0.30	20.40min	11.00±0.15	22.70±0.70	0.50±0.05	Ae	Le	Ve	76.00mm ²	70.40mm	5350mm ³	材質 (Material)	初導磁率 μ i	電感(Inductance) AL(nH/N ²)	P41	2400±25%	201±5%	測試條件 Condition	10kHz,50mV	測試儀器 Equipment	卡尺(callipers)/HP4284A	室溫 Temperature	25°C±3°C;	線圈 COIL	0.25mm,10Ts(ACME)	核准(Approved by):	審查(Checked by):	制定(Prepared by): Renjie Xiao	頁次(Page)1/1 KS	
A	B	C	D	E	F	G	GAP																																						
29.80±0.80	15.80±0.20	9.50±03.0	9.50±0.30	20.40min	11.00±0.15	22.70±0.70	0.50±0.05																																						
Ae	Le	Ve																																											
76.00mm ²	70.40mm	5350mm ³																																											
材質 (Material)	初導磁率 μ i	電感(Inductance) AL(nH/N ²)																																											
P41	2400±25%	201±5%																																											
測試條件 Condition	10kHz,50mV																																												
測試儀器 Equipment	卡尺(callipers)/HP4284A																																												
室溫 Temperature	25°C±3°C;																																												
線圈 COIL	0.25mm,10Ts(ACME)																																												
核准(Approved by):	審查(Checked by):	制定(Prepared by): Renjie Xiao	頁次(Page)1/1 KS																																										