


越峰電子材料股份有限公司 ACME Electronics Corporation					客戶規格編號(Customer Spec.No.)																																												
客戶特殊規格書 (Customer Specification)		品名: (Part No.) P41LM114CHG825		客戶名稱 (Customer)		生效日期(Effective Date)																																											
客戶料號(Customer Part No.):						版次(Version) 第一版																																											
 尺寸規格 Dimensions (mm) : <table><tr><td>A</td><td>2B</td><td>C</td><td>D</td><td>D1</td><td>E</td><td>2F</td><td>G</td><td>J</td><td>S</td></tr><tr><td>114+0/-4.5</td><td>93+0/-1</td><td>45max</td><td>43+0/-1.4</td><td>5.4+0.4/-0</td><td>88+3.7/-0</td><td>63+1.6/-0</td><td>52min</td><td>5.3+1/-0</td><td>3.4±0.2</td></tr></table> <table><tr><td>Ae</td><td>Le</td><td>Ve</td></tr><tr><td>1720mm²</td><td>200mm</td><td>344000mm³</td></tr></table> 電磁特性規格 (Electrical Characteristics): 低鐵損材質 (Low loss Material) <table><tr><td>材質 (Material)</td><td>初導磁率 μi</td><td>電感(Inductance) AL(nH/N²)</td></tr><tr><td>P41</td><td>2400±25%</td><td>825±8%</td></tr></table> 測試條件(Testing Condition): <table><tr><td>測試條件 Condition</td><td>AL:10kHz,50mV</td></tr><tr><td>測試儀器 Equipment</td><td>卡尺(callipers)/HP4284A</td></tr><tr><td>室溫 Temperature</td><td>AL:25°C±3°C;</td></tr><tr><td>線圈 COIL</td><td>Customer coils</td></tr></table> REMARK:										A	2B	C	D	D1	E	2F	G	J	S	114+0/-4.5	93+0/-1	45max	43+0/-1.4	5.4+0.4/-0	88+3.7/-0	63+1.6/-0	52min	5.3+1/-0	3.4±0.2	Ae	Le	Ve	1720mm ²	200mm	344000mm ³	材質 (Material)	初導磁率 μi	電感(Inductance) AL(nH/N ²)	P41	2400±25%	825±8%	測試條件 Condition	AL:10kHz,50mV	測試儀器 Equipment	卡尺(callipers)/HP4284A	室溫 Temperature	AL:25°C±3°C;	線圈 COIL	Customer coils
A	2B	C	D	D1	E	2F	G	J	S																																								
114+0/-4.5	93+0/-1	45max	43+0/-1.4	5.4+0.4/-0	88+3.7/-0	63+1.6/-0	52min	5.3+1/-0	3.4±0.2																																								
Ae	Le	Ve																																															
1720mm ²	200mm	344000mm ³																																															
材質 (Material)	初導磁率 μi	電感(Inductance) AL(nH/N ²)																																															
P41	2400±25%	825±8%																																															
測試條件 Condition	AL:10kHz,50mV																																																
測試儀器 Equipment	卡尺(callipers)/HP4284A																																																
室溫 Temperature	AL:25°C±3°C;																																																
線圈 COIL	Customer coils																																																
核准(Approved by):		審查(Checked by):		制定(Prepared by): Renjie Xiao		頁次(Page)1/1 KS																																											

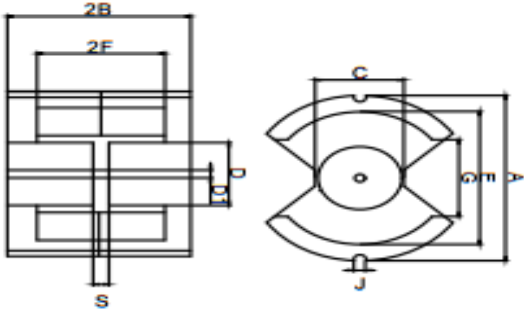