

申請單號：



ACME Electronics Corporation
越峰電子材料股份有限公司

規格書名稱/Specifications :P49EF12.6JG250


客戶料號/Customer P/N：

一、形狀、尺寸、材質/Shape, dimensions & material：

(1)形狀、尺寸：如下圖所示(單位：mm)Shape & dimensions：

(2)材質Material：IP49

圖例/Drawing：

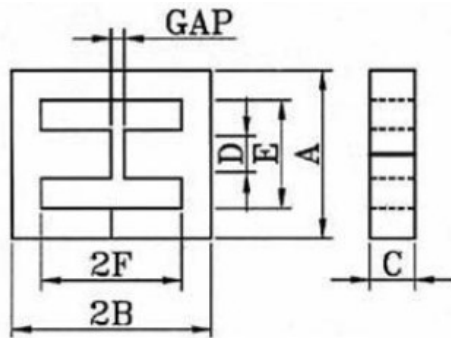

尺寸規格/Dimensions：

A：	$12.6+0.50/-0.40$
B：	6.4 ± 0.10
C：	3.55 ± 0.15
D：	3.55 ± 0.15
E：	9.2 ± 0.30
F：	4.65 ± 0.15
GAP:	0.04ref

Ae：	12.40mm^2
Le：	29.60mm
Ve：	367.00mm^3
Wt：	1.76g/pcs

二、電磁特性規格(Electrical Characteristics)：

材質 (Material)	初導磁率 μ_i (Initial Permeability)
P49	$1700\pm25\%$

測試條件(Test Conditions)

測試項目 Item	單位 Units	測試條件 Test Condition	測試溫度 Temperature	規格 Spec	測試儀器 Equipment	測試線包 Test coil
AL	nH/N ²	10kHz/50mV	$25^\circ\text{C} \pm 3^\circ\text{C}$	$250\pm10\%$	Calipers/HP4284A	Customer's coil

量測手法 (選擇項目為“■”) Test method(“■” means Yes)：

■包麥拉帶2圈 Wrap 2 layers of tape

□客戶測試夾子Test with clip

□至少對磨三次以上測試Abrad matching surface each other 3 times before testing the inductance

■平面配GAP測試Test by nogap core and gapped core

□雙GAP測試Test by pair of gapped cores

■GAP產品放置於引線端測試Place the gapped core at the test side and close to the bobbin before testing

□GAP產品放置於非引線端測試Place the nogap core at the test side and close to the bobbin before testing

注意事項: Remarks



AR01-60106-02