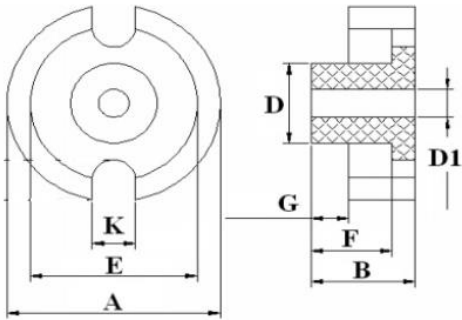


越峰電子材料股份有限公司 ACME Electronics Corporation			客戶規格編號(Customer Spec.No.)																											
客戶特殊規格書 (Customer Specification)	品名: (Part No.) P4POT7.35A/3.6CH	客戶名稱 (Customer)	生效日期(Effective Date)																											
客戶料號(Customer Part No.):			版次(Version) 第一版																											
 尺寸規格 Dimensions (mm) : <table><tr><td>A</td><td>B</td><td>D</td><td>D1</td><td>E</td><td>F</td><td>G</td><td>K</td></tr><tr><td>7.35+0/-0.4</td><td>3.60±0.15</td><td>3.00+0/-0.2</td><td>1.05+0.2/-0</td><td>5.80+0.30/-0</td><td>2.80+0.30/-0</td><td>1.80±0.2</td><td>1.30+0.4/-0</td></tr></table><table><tr><td>Ae</td><td>Le</td><td>Ve</td></tr><tr><td>6.71mm²</td><td>13.27mm</td><td>89.04mm³</td></tr></table> 電磁特性規格 (Electrical Characteristics): 低鐵損材質 (Low loss Material) <table><tr><td>材質 (Material)</td><td>初導磁率 μ i</td></tr><tr><td>P4</td><td>2500±25%</td></tr></table>					A	B	D	D1	E	F	G	K	7.35+0/-0.4	3.60±0.15	3.00+0/-0.2	1.05+0.2/-0	5.80+0.30/-0	2.80+0.30/-0	1.80±0.2	1.30+0.4/-0	Ae	Le	Ve	6.71mm ²	13.27mm	89.04mm ³	材質 (Material)	初導磁率 μ i	P4	2500±25%
A	B	D	D1	E	F	G	K																							
7.35+0/-0.4	3.60±0.15	3.00+0/-0.2	1.05+0.2/-0	5.80+0.30/-0	2.80+0.30/-0	1.80±0.2	1.30+0.4/-0																							
Ae	Le	Ve																												
6.71mm ²	13.27mm	89.04mm ³																												
材質 (Material)	初導磁率 μ i																													
P4	2500±25%																													
REMARK: 1.Using POT7.35BCH tooling																														
核准(Approved by):	審查(Checked by):	制定(Prepared by): Renjie Xiao	頁次(Page)1/1 KS																											