











SNOS405B - NOVEMBER 1999-REVISED MAY 2017

**MAX660** 

# **MAX660 Switched Capacitor Voltage Converter**

#### **Features**

- Inverts or Doubles Input Supply Voltage
- Narrow SO-8 Package
- $6.5-\Omega$  Typical Output Resistance
- 88% Typical Conversion Efficiency at 100 mA
- Selectable Oscillator Frequency: 10 kHz/80 kHz

### **Applications**

- Laptop Computers
- Cellular Phones
- Medical Instruments
- Operational Amplifier Power Supplies
- Interface Power Supplies
- Handheld Instruments

### 3 Description

The MAX660 CMOS charge-pump voltage converter is a versatile unregulated switched-capacitor inverter or doubler. Operating from a wide 1.5-V to 5.5-V supply voltage, the MAX660 uses two low-cost capacitors to provide 100 mA of output current without the cost, size and EMI related to inductorbased converters. With an operating current of only 120 µA and operating efficiency greater than 90% at most loads, the MAX660 provides ideal performance for battery-powered systems. MAX660 devices can be operated directly in parallel to lower output impedance, thus providing more current at a given voltage.

The FC (frequency control) pin selects between a nominal 10-kHz or 80-kHz oscillator frequency. The oscillator frequency can be lowered by adding an external capacitor to the OSC pin. Also, the OSC pin may be used to drive the MAX660 with an external clock up to 150 kHz. Through these methods, output ripple frequency and harmonics may be controlled.


Additionally, the MAX660 may be configured to divide a positive input voltage precisely in half. In this mode, input voltages as high as 11 V may be used.

### Device Information<sup>(1)</sup>

PART NUMBER	PACKAGE	BODY SIZE (NOM)
MAX660	SOIC (8)	4.90 mm × 3.91 mm


(1) For all available packages, see the orderable addendum at the end of the data sheet.

### Voltage Inverter



Copyright © 2016, Texas Instruments Incorporated

#### **Positive Voltage Doubler**



Copyright © 2016, Texas Instruments Incorporated



1	Га	h	۵۱	Ωf	Co	nte	nte
ı	a	u		OI.	CU	HIC	1112

1	Features 1		9.3 Feature Description	11
2	Applications 1		9.4 Device Functional Modes	11
3	Description 1	10	Application and Implementation	12
4	Revision History2		10.1 Application Information	12
5	Device Comparison Tables3		10.2 Typical Applications	12
6	Pin Configuration and Functions 4		10.3 Split V+ in Half	18
7	Specifications5	11	Power Supply Recommendations	18
•	7.1 Absolute Maximum Ratings	12	Layout	19
	7.2 ESD Ratings		12.1 Layout Guidelines	19
	7.3 Recommended Operating Conditions		12.2 Layout Example	19
	7.4 Thermal Information	13	Device and Documentation Support	20
	7.5 Electrical Characteristics 6		13.1 Device Support	20
	7.6 Typical Characteristics		13.2 Receiving Notification of Documentation Upda	ites 20
8	Parameter Measurement Information9		13.3 Community Resources	20
Ü	8.1 MAX660 Test Circuit		13.4 Trademarks	20
9	Detailed Description		13.5 Electrostatic Discharge Caution	20
9	9.1 Overview		13.6 Glossary	20
	9.2 Functional Block Diagram	14	Mechanical, Packaging, and Orderable Information	20

# 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

CI	hanges from Revision A (October 2016) to Revision B	Page
•	Changed Figure 5 caption from "Efficiency vs Oscillator Frequency" to "Efficiency vs Load Current"	7
CI	hanges from Original (SNOS405) to Revision A	Page
•	Added additional info to DescriptionDevice Information and Pin Configuration and Functions sections, ESD Ratings and Thermal Information tables, Feature Description, Device Functional Modes, Application and Implementation, Power Supply Recommendations, Layout, Device and Documentation Support, and Mechanical, Packaging, and Orderable Information sections	
•	Deleted obsolete device number information from Device Comparison table	3
•	Deleted lead temperature spec from Abs Max as it is in POA	5
•	Added additional thermal values; changed R <sub>BJA</sub> from "170°C/W" to "114.4°C/W"	5
•	Changed "PL" to "PM" and "PF" to PJ" - manufacturers changed their part number prefix	14
•	Changed "Sprague" to "Vishay Sprague" per website	14



# **5 Device Comparison Tables**


	LM2664	LM2665	MAX660
Package	SOT-23 (6)	SOT-23 (6)	SOIC
Supply current (typical) (mA)	0.22	0.22	0.12 at 10 kHz, 1 at 80 kHz
Output (typical) $(\Omega)$	12	12	6.5
Oscillator (kHz)	80	80	10, 80
Input (V)	1.8 to 5.5	1.8 to 5.5	1.8 to 5.5
Output mode(s)	Invert	Double	Invert, Double

	MAX660	LM2662	LM2663
Package	SOIC, VSSOP (8)	SOIC (8)	SOIC (8)
Supply current (typical) (mA)	0.12 at 10 kHz, 1 at 80 kHz	0.3 at 10 kHz, 1.3 at 70 kHz	1.3
Output (typical) $(\Omega)$	6.5	3.5	3.5
Oscillator (kHz)	10, 80	10, 70	70
Input (V)	1.8 to 5.5	1.8 to 5.5	1.8 to 5.5
Output mode(s)	Invert, Double	Invert, Double	Invert, Double

Copyright © 1999–2017, Texas Instruments Incorporated



# 6 Pin Configuration and Functions



#### **Pin Functions**

P	PIN		DESCRIPTION			
NAME	NO.	1/0	VOLTAGE INVERTER	VOLTAGE DOUBLER		
CAP+	2	Power	Connect this pin to the positive terminal of charge-pump capacitor.	Same as inverter		
CAP-	4	Power	Connect this pin to the negative terminal of charge-pump capacitor.	Same as inverter		
FC	1	Input	Frequency control for internal oscillator: FC = open, $f_{\rm OSC}$ = 10 kHz (typical); FC = V+, $f_{\rm OSC}$ = 80 kHz (typical); FC has no effect when OSC pin is driven externally	Same as inverter		
GND	3	Ground	Power supply ground input.	Power supply positive voltage input		
LV	6	Input	Low-voltage operation input. Tie LV to GND when input voltage is less than 3.5 V. Above 3.5 V, LV can be connected to GND or left open. When driving OSC with an external clock, LV must be connected to GND.	LV must be tied to OUT.		
osc	7	Input	Oscillator control input. OSC is connected to an internal 15-pF capacitor. An external capacitor can be connected to slow the oscillator. Also, an external clock can be used to drive OSC.	Same as inverter except that OSC cannot be driven by an external clock		
OUT	5	Power	Negative voltage output	Positive supply ground input		
V+	8	Power	Power supply positive voltage input	Positive voltage output		



### 7 Specifications

### 7.1 Absolute Maximum Ratings

	MIN	MAX	UNIT
Supply voltage (V+ to GND, or GND to OUT)		6	V
LV	(OUT - 0.3 V)	GND + 3 V)	
FC, OSC	The least negative of (OUT (V+ 0.3		
V+ and OUT continuous output current		120	mA
Output short-circuit duration to GND <sup>(3)</sup>		1	sec
Power dissipation, $T_A = 25^{\circ}C^{(4)}$		735	mW
T <sub>J</sub> , maximum <sup>(4)</sup>		150	°C
Operating junction temperature	-40	85	°C
Storage temperature, T <sub>stg</sub>	-65	150	°C

<sup>(1)</sup> Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 7.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 (1)	±2000	V

<sup>(1)</sup> JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

#### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM MAX	UNIT
	Inverter, LV = open	3.5	5.5	
V+ (supply voltage)	Inverter, LV = GND	1.5	5.5	V
	Doubler, LV = out	2.5	5.5	
Junction temperature (T <sub>J</sub> )		-40	85	°C

#### 7.4 Thermal Information

		MAX660	
			UNIT
		8 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	114.4	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	61.4	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	55.5	°C/W
ΨЈТ	Junction-to-top characterization parameter	9.8	°C/W
ΨЈВ	Junction-to-board characterization parameter	54.9	°C/W

(1) For more information about traditional and new thermal metrics, see Semiconductor and IC Package Thermal Metrics.

Product Folder Links: MAX660

<sup>(2)</sup> If Military/Aerospace specified devices are required, contact the Texas Instruments Sales Office/ Distributors for availability and specifications.

<sup>(3)</sup> OUT may be shorted to GND for one second without damage. However, shorting OUT to V+ may damage the device and must be avoided. Also, for temperatures above 85°C, OUT must not be shorted to GND or V+, or device may be damaged.

<sup>(4)</sup> The maximum allowable power dissipation is calculated by using  $P_{D\_MAX} = (T_{J\_MAX} - T_A) / R_{\theta JA}$ , where  $T_{J\_MAX}$  is the maximum junction temperature,  $T_A$  is the ambient temperature, and  $R_{\theta JA}$  is the junction-to-ambient thermal resistance of the specified package.



#### 7.5 Electrical Characteristics

Unless otherwise specified: Limits apply for  $T_J = 25^{\circ}C$ , V+ = 5 V, FC = open,  $C1 = C2 = 150 \mu F$ . (1)

	PARAMETER	TE	ST CONDITIONS	MIN	TYP	MAX	UNIT
	Supply voltage		Inverter LV = open <sup>(3)</sup> , $T_J = -40$ °C to 85°C	3.5		5.5	V
V+ <sup>(2)</sup>		oly voltage $R_L = 1 \text{ k}\Omega$	Inverter, LV = GND, $T_J = -40^{\circ}\text{C}$ to 85°C	1.5		5.5	
			Doubler, LV = OUT, $T_J = -40^{\circ}\text{C}$ to 85°C	2.5		5.5	
			FC = open		0.12		
	Cupaly aurent	No lood IV open	FC = open, $T_J = -40$ °C to 85°C			0.5	A
IQ	Supply current	No load, LV = open	FC = V+		1		mA
			FC = V+, T <sub>J</sub> = -40°C to 85°C			3	
	Output ourrent	$T_A \le 85^{\circ}C$ , OUT $\le -4 \text{ V}$ 100				A	
l∟	Output current	T <sub>A</sub> > 85°C, OUT ≤ −3	.8 V	100			mA
R <sub>OUT</sub>	Output resistance (2)		T <sub>A</sub> ≤ 85°C		6.5	10	Ω
		$I_L = 100 \text{ mA}$	$T_J = -40$ °C to 85°C			10	
			$T_A > 85$ °C, $T_J = -40$ °C to $85$ °C			12	
	Oppillator fra guaran		FC = open		10		kHz
f		scillator frequency OSC = open	FC = open, $T_J = -40$ °C to 85°C	5			
fosc	Oscillator frequency	OSC = open	FC = V+		80		
			$FC = V+, T_J = -40^{\circ}C \text{ to } 85^{\circ}C$	40			
	OSC input current	FC = open			±2		
losc	OSC input current	FC = V+			±16		μA
		$R_L$ (1 k $\Omega$ ) between V-	+ and OUT		98%		
		$R_L$ (1 k $\Omega$ ) between V- T <sub>J</sub> = -40°C to 85°C	$R_L$ (1 kΩ) between V+ and OUT $T_J = -40$ °C to 85°C				
$P_{EFF}$	Power efficiency	R <sub>L</sub> (500 Ω) between 0	GND and OUT		96%		
		$R_L$ (500 $\Omega$ ) between 0 $T_J = -40^{\circ}$ C to 85°C	$R_L$ (500 Ω) between GND and OUT $T_J = -40$ °C to 85°C $I_L = 100$ mA to GND				
		$I_L = 100 \text{ mA to GND}$			88%		
V	Voltage conversion	No load			99.96%		
$V_{OEFF}$	efficiency	No load, $T_J = -40^{\circ}C$ t	to 85°C	99%			

<sup>(1)</sup> In the test circuit, capacitors C1 and C2 are 0.2-Ω maximum ESR capacitors. Capacitors with higher ESR increase output resistance, reduce output voltage, and efficiency.


<sup>(2)</sup> Specified output resistance includes internal switch resistance and capacitor ESR.

<sup>(3)</sup> The minimum limit for this parameter is different from the limit of 3 V for the industry-standard 660 product. For inverter operation with supply voltage below 3.5 V, connect the LV pin to GND.



### 7.6 Typical Characteristics


Circuit of Voltage Inverter and Positive Voltage Doubler.

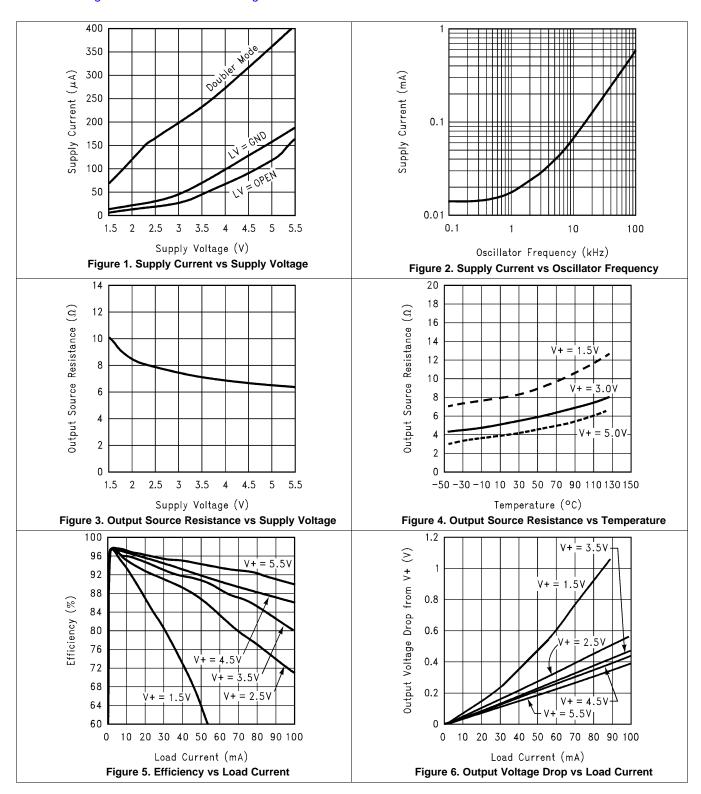

# **STRUMENTS**

### **Typical Characteristics (continued)**

Circuit of Voltage Inverter and Positive Voltage Doubler.

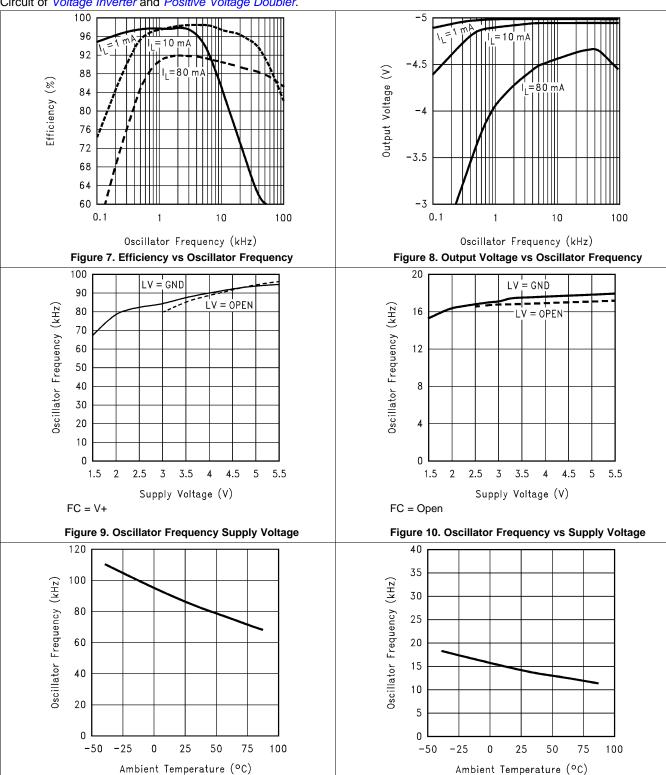

Submit Documentation Feedback

Figure 11. Oscillator Frequency vs Temperature

FC = V+


Figure 12. Oscillator Frequency vs Temperature

FC = Open



# 8 Parameter Measurement Information

### 8.1 MAX660 Test Circuit

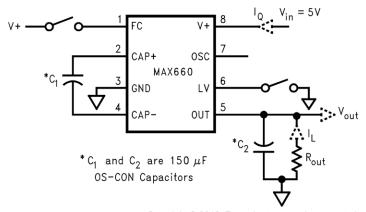

Copyright © 2016, Texas Instruments Incorporated



### 9 Detailed Description

#### 9.1 Overview

The MAX660 contains four large CMOS switches which are switched in a sequence to invert the input supply voltage. Energy transfer and storage are provided by external capacitors. Figure 13 shows the voltage conversion scheme. When S1 and S3 are closed, C1 charges to the supply voltage V+. During this time interval switches S2 and S4 are open. In the second time interval, S1 and S3 are open and S2 and S4 are closed, C1 is charging C2. After a number of cycles, the voltage across C2 is pumped to V+. Because the anode of C2 is connected to ground, the output at the cathode of C2 equals -(V+) assuming no load on C2, no loss in the switches, and no ESR in the capacitors. In reality, the charge transfer efficiency depends on the switching frequency, the on-resistance of the switches, and the ESR of the capacitors.


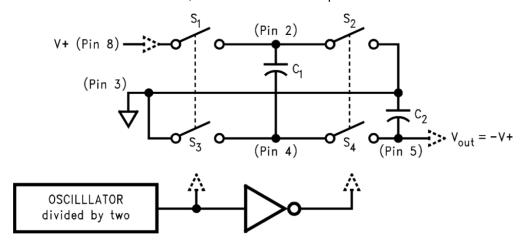


Figure 13. Voltage Inverting Principle

#### 9.2 Functional Block Diagram



Copyright@2016, Texas Instruments Incorporated

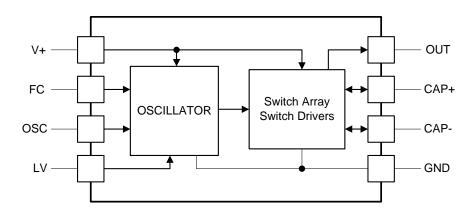

### 9.3 Feature Description

The internal oscillator frequency can be selected using the frequency control (FC) pin. When FC is open, the oscillator frequency is 10 kHz; when FC is connected to V+, the frequency increases to 80 kHz. A higher oscillator frequency allows use of smaller capacitors for equivalent output resistance and ripple, but increases the typical supply current from 0.12 mA to 1 mA. The oscillator frequency can be lowered by adding an external capacitor between OSC and GND. (See *Typical Characteristics*.) Also, in the inverter mode, an external clock that swings within 100 mV of V+ and GND can be used to drive OSC. Any CMOS logic gate is suitable for driving OSC. LV must be grounded when driving OSC. The maximum external clock frequency is limited to 150 kHz.

The switching frequency of the converter (also called the charge-pump frequency) is half of the oscillator frequency.




Table 1. MAX660 Oscillator Frequency Selection

FC	OSC	OSCILLATOR		
Open	Open	10 kHz		
V+	Open	80 kHz		
Open or V+	External capacitor	See Typical Characteristics		
N/A	External clock (inverter mode only)	External clock frequency		

#### 9.4 Device Functional Modes

When V+ is applied to the MAX660, the device becomes enabled and operates in whichever configuration the device is placed (inverter, doubler, etc.).

Product Folder Links: MAX660



### 10 Application and Implementation

#### NOTE


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 10.1 Application Information

The MAX660 CMOS charge-pump voltage converter is a versatile, unregulated switched-capacitor inverter or doubler. Operating from a wide 1.5-V to 5.5-V supply voltage, the MAX660 uses two low-cost capacitors to provide 100 mA of output current without the cost, size, and EMI related to inductor-based converters. With an operating current of only 120 µA and operating efficiency greater than 90% at most loads, the MAX660 provides ideal performance for battery-powered systems. MAX660 devices can be operated directly in parallel to lower output impedance, thus providing more current at a given voltage.

### 10.2 Typical Applications

#### 10.2.1 Voltage Inverter



Copyright © 2016, Texas Instruments Incorporated

Figure 14. MAX660 Voltage Inverter

#### 10.2.1.1 Design Requirements

For typical switched capacitor applications, use the parameters in Table 2:

**Table 2. Design Parameters** 

DESIGN PARAMETER	EXAMPLE VALUE
Input voltage	5.5 V (maximum)
Negative output voltage	−1.5 V to −5.5 V
Output current	100 mA

#### 10.2.1.2 Detailed Design Procedure

The main application of MAX660 is to generate a negative supply voltage. The voltage inverter circuit uses only two external capacitors as shown in the Figure 14. The range of the input supply voltage is 1.5 V to 5.5 V. For a supply voltage less than 3.5 V, the LV pin must be connected to ground to bypass the internal regulator circuitry. This gives the best performance in low-voltage applications. If the supply voltage is greater than 3.5 V, LV may be connected to ground or left open. The choice of leaving LV open simplifies the direct substitution of the MAX660 for the LMC7660 switched capacitor voltage converter.

The output characteristics of this circuit can be approximated by an ideal voltage source in series with a resistor. The voltage source equals  $\neg(V+)$ . The output resistance  $R_{out}$  is a function of the ON resistance of the internal MOS switches, the oscillator frequency, and the capacitance and ESR of  $C_1$  and  $C_2$ . A good approximation is:

Product Folder Links: MAX660



$$R_{out} \cong 2R_{SW} + \frac{2}{f_{osc} \times C_1} + 4ESR_{C1} + ESR_{C2}$$

where

High-value, low-ESR capacitors reduce the output resistance. Instead of increasing the capacitance, the oscillator frequency can be increased to reduce the  $2/(f_{OSC}c \times C1)$  term. Once this term is trivial compared with R<sub>SW</sub> and ESRs, further increase to oscillator frequency and capacitance become ineffective. The peak-to-peak output voltage ripple is determined by the oscillator frequency, and the capacitance and ESR of the output capacitor C2:

$$V_{ripple} = \frac{I_L}{f_{osc} \times C_2} + 2 \times I_L \times ESR_{C2}$$
 (2)

Again, using a low-ESR capacitor results in lower ripple.

#### 10.2.1.2.1 Capacitor Selection

The output resistance and ripple voltage are dependent on the capacitance and ESR values of the external capacitors. The output voltage drop is the load current times the output resistance, and the power efficiency is shown in Equation 3:

$$\eta = \frac{P_{out}}{P_{in}} = \frac{I_L^2 R_L}{I_L^2 R_L + I_L^2 R_{out} + I_O(V+)}$$

where

- I<sub>Q(V+)</sub> is the quiescent power loss of the device
- I<sub>L</sub><sup>2</sup><sub>ROUT</sub> is the conversion loss associated with the switch on-resistance, the two external capacitors and their ESRs

Because the switching current charging and discharging C1 is approximately twice that of the output current, the effect of the ESR of the pumping capacitor C1 is multiplied by four in the output resistance. The output capacitor C2 is charging and discharging at a current approximately equal to the output current; therefore, its ESR only counts once in the output resistance. However, the ESR of C2 directly affects the output voltage ripple. Therefore, TI recommends low-ESR capacitors (Table 3) for both capacitors to maximize efficiency, reduce the output voltage drop and voltage ripple. For convenience, C1 and C2 are usually chosen to be the same. The output resistance varies with the oscillator frequency and the capacitors. In Figure 15, the output resistance vs oscillator frequency curves are drawn for three different tantalum capacitors. At very low frequency range, capacitance plays the most important role in determining the output resistance. Once the frequency is increased to some point (such as 20 kHz for the 150-μF capacitors), the output resistance is dominated by the ON resistance of the internal switches and the ESRs of the external capacitors. A low-value, smaller size capacitor usually has a higher ESR compared with a larger size capacitor of the same type. For lower ESR, use ceramic capacitors.

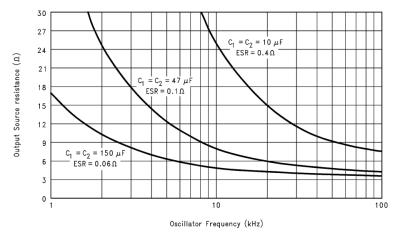


Figure 15. Output Source Resistance vs Oscillator Frequency




#### **Table 3. Low-ESR Capacitor Manufacturers**

MANUFACTURER	CAPACITOR TYPE			
Nichicon Corp.	PM, PJ series, through-hole aluminum electrolytic			
AVX Corp.	TPS series, surface-mount tantalum			
Vishay Sprague	593D, 594D, 595D series, surface-mount tantalum			
Sanyo	OS-CON series, through-hole aluminum electrolytic			

#### 10.2.1.2.2 Paralleling Devices

Any number of MAX660 devices can be paralleled to reduce the output resistance. Each device must have its own pumping capacitor  $C_1$ , while only one output capacitor  $C_{OUT}$  is required as shown in Figure 16. The composite output resistance is:

 $R_{OUT} = R_{OUT}$  of each MAX660 / Number of Devices (4)

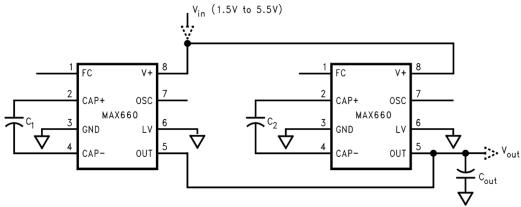

Copyright © 2016, Texas Instruments Incorporated

Figure 16. Lowering Output Resistance by Paralleling Devices

#### 10.2.1.2.3 Cascading Devices

Cascading the MAX660s is an easy way to produce a greater negative voltage (as shown in Figure 17). If n is the integer representing the number of devices cascaded, the unloaded output voltage  $V_{out}$  is  $(-nV_{in})$ . The effective output resistance is equal to the weighted sum of each individual device:

$$R_{out} = nR_{out_{-1}} + \frac{n}{2}R_{out_{-2}} + \dots + R_{out_{-n}}$$
(5)

A three-stage cascade circuit shown in Figure 18 generates -3 V<sub>in</sub>, from V<sub>in</sub>.

Cascading is also possible when devices are operating in doubling mode. In Figure 19, two devices are cascaded to generate 3  $V_{\text{IN}}$ .

An example of using the circuit in Figure 18 or Figure 19 is generating +15 V or −15 V from a +5-V input.

#### NOTE

The number of n is practically limited because the increasing of n significantly reduces the efficiency and increases the output resistance and output voltage ripple.

Copyright © 1999–2017, Texas Instruments Incorporated

Product Folder Links: MAX660



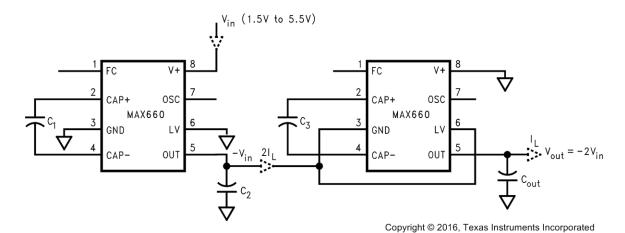


Figure 17. Increasing Output Voltage by Cascading Devices

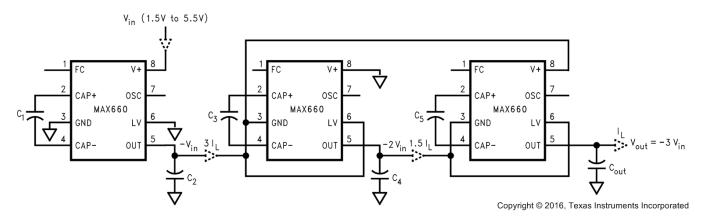


Figure 18. Generating −3V<sub>IN</sub> From +V<sub>IN</sub>

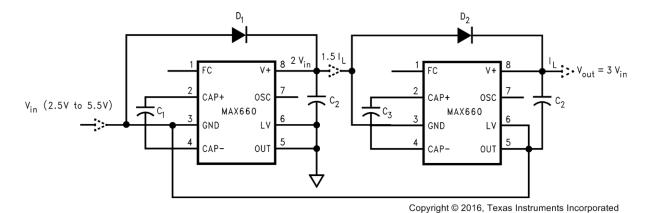


Figure 19. Generating +3V<sub>IN</sub> From +V<sub>IN</sub>



#### 10.2.1.2.4 Regulating Output Voltage

Output of the MAX660 can be regulated by use of a low-dropout regulator (such as LP2951). The whole converter is depicted in Figure 20. This converter can give a regulated output from -1.5 V to -5.5 V by choosing the proper resistor ratio:

$$V_{out} = V_{ref} \left( 1 + \frac{R_1}{R_2} \right) \tag{6}$$

The error flag on pin 5 of the LP2951 goes low when the regulated output at pin 4 drops by about 5%. The LP2951 can be shut down by taking pin 3 high.

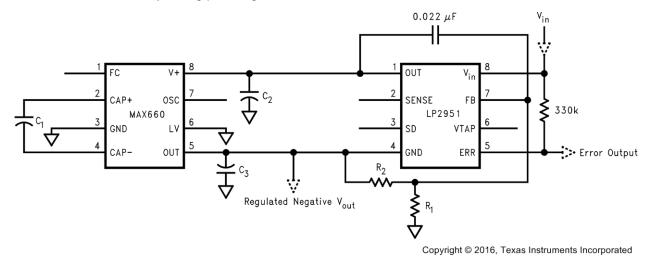


Figure 20. Combining MAX660 With LP2951 to Make a Negative Regulator

As shown in Figure 21 by operating MAX660 in voltage doubling mode and adding a linear regulator (such as LP2981) at the output, the user can get +5-V output from an input as low as +3 V.


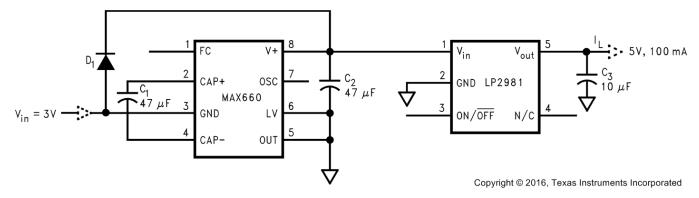



Figure 21. Generating +5 V From +3-V Input Voltage



#### 10.2.1.3 Application Curves

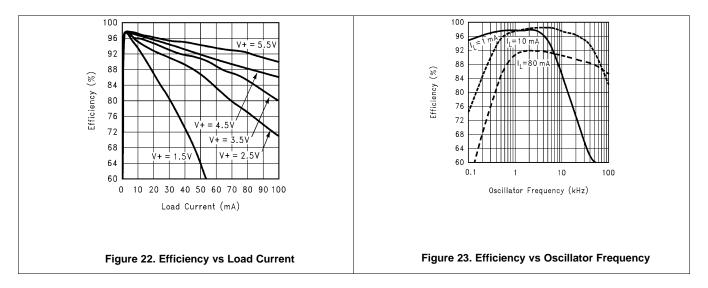

#### 10.2.2 Positive Voltage Doubler



Copyright © 2016, Texas Instruments Incorporated

Figure 24. MAX660 Voltage Doubler

### 10.2.2.1 Design Requirements

The MAX660 can operate as a positive voltage doubler (as shown in the Figure 24). The doubling function is achieved by reversing some of the connections to the device. The input voltage is applied to the GND pin with an allowable voltage from 2.5 V to 5.5 V. The V+ pin is used as the output. The LV pin and OUT pin must be connected to ground. The OSC pin cannot be driven by an external clock in this operation mode. The unloaded output voltage is twice of the input voltage and is not reduced by the forward drop of the diode  $(D_1)$ .

#### 10.2.2.2 Detailed Design Procedure


The Schottky diode  $D_1$  is only needed for start-up. The internal oscillator circuit uses the V+ pin and the LV pin (connected to ground in the voltage doubler circuit) as its power rails. Voltage across V+ and LV must be larger than 1.5 V to ensure the operation of the oscillator. During start-up,  $D_1$  is used to charge up the voltage at V+ pin to start the oscillator; also, it protects the device from turning on its own parasitic diode and potentially latching up. Therefore, the Schottky diode  $D_1$  must have enough current carrying capability to charge the output capacitor at start-up, as well as a low forward voltage to prevent the internal parasitic diode from turning on. A Schottky diode like 1N5817 can be used for most applications. If the input voltage ramp is less than 10V/ms, a smaller Schottky diode like MBR0520LT1 can be used to reduce the circuit size.

Product Folder Links: MAX660



#### 10.3 Split V+ in Half

Another interesting application shown in Figure 25 is to use the MAX660 as a precision voltage divider. Because the off-voltage across each switch equals VIN/2, the input voltage can be raised to 11 V.



Copyright © 2016, Texas Instruments Incorporated

Figure 25. Splitting V<sub>IN</sub> in Half

### 11 Power Supply Recommendations

The MAX660 is designed to operate from as an inverter over an input voltage supply range between 1.5 V and 5.5 V when the LV pin is grounded. This input supply must be well regulated and capable to supply the required input current. If the input supply is located far from the MAX660 additional bulk capacitance may be required in addition to the ceramic bypass capacitors.



### 12 Layout

#### 12.1 Layout Guidelines

The high switching frequency and large switching currents of the MAX660 make the choice of layout important. The following steps should be used as a reference to ensure the device is stable and maintains proper LED current regulation across its intended operating voltage and current range:

- Place C<sub>IN</sub> on the top layer (same layer as the MAX60) and as close as possible to the device. Connecting the
  input capacitor through short, wide traces to both the V+ and GND pins reduces the inductive voltage spikes
  that occur during switching which can corrupt the V+ line.
- Place C<sub>OUT</sub> on the top layer (same layer as the MAX660) and as close as possible to the OUT and GND pin.
  The returns for both C<sub>IN</sub> and C<sub>OUT</sub> must come together at one point, as close as possible to the GND pin.
  Connecting C<sub>OUT</sub> through short, wide traces reduce the series inductance on the OUT and GND pins that can corrupt the V<sub>OUT</sub> and GND lines and cause excessive noise in the device and surrounding circuitry.
- Place C<sub>1</sub> on the top layer (same layer as the MAX660) and as close as possible to the device. Connect the flying capacitor through short, wide traces to both the CAP+ and CAP- pins.

### 12.2 Layout Example




Figure 26. MAX660 Layout Example



### 13 Device and Documentation Support

### 13.1 Device Support

#### 13.1.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

### 13.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 13.3 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community T's Engineer-to-Engineer (E2E) Community. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 13.4 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

#### 13.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

#### 13.6 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

### 14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Product Folder Links: MAX660



### PACKAGE OPTION ADDENDUM

2-Nov-2017

#### PACKAGING INFORMATION

www.ti.com

Orderable Device	Status	Package Type	_	Pins	_	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking	Samples
	(1)		Drawing		Qty	(2)	(6)	(3)		(4/5)	
MAX660M	NRND	SOIC	D	8	95	TBD	Call TI	Call TI		MAX 660M	
MAX660M/NOPB	ACTIVE	SOIC	D	8	95	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	MAX 660M	Samples
MAX660MX/NOPB	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	MAX 660M	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead/Ball Finish Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



### **PACKAGE OPTION ADDENDUM**

2-Nov-2017


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 1-Feb-2016

### TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
MAX660MX/NOPB	SOIC	D	8	2500	330.0	12.4	6.5	5.4	2.0	8.0	12.0	Q1

www.ti.com 1-Feb-2016



#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)	
MAX660MX/NOPB	SOIC	D	8	2500	367.0	367.0	35.0	

# D (R-PDSO-G8)

### PLASTIC SMALL OUTLINE



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AA.



#### **IMPORTANT NOTICE**

Texas Instruments Incorporated (TI) reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

TI's published terms of sale for semiconductor products (http://www.ti.com/sc/docs/stdterms.htm) apply to the sale of packaged integrated circuit products that TI has qualified and released to market. Additional terms may apply to the use or sale of other types of TI products and services.

Reproduction of significant portions of TI information in TI data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such reproduced documentation. Information of third parties may be subject to additional restrictions. Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyers and others who are developing systems that incorporate TI products (collectively, "Designers") understand and agree that Designers remain responsible for using their independent analysis, evaluation and judgment in designing their applications and that Designers have full and exclusive responsibility to assure the safety of Designers' applications and compliance of their applications (and of all TI products used in or for Designers' applications) with all applicable regulations, laws and other applicable requirements. Designer represents that, with respect to their applications, Designer has all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. Designer agrees that prior to using or distributing any applications that include TI products, Designer will thoroughly test such applications and the functionality of such TI products as used in such applications.

TI's provision of technical, application or other design advice, quality characterization, reliability data or other services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using TI Resources in any way, Designer (individually or, if Designer is acting on behalf of a company, Designer's company) agrees to use any particular TI Resource solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

Designer is authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY DESIGNER AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Unless TI has explicitly designated an individual product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949 and ISO 26262), TI is not responsible for any failure to meet such industry standard requirements.

Where TI specifically promotes products as facilitating functional safety or as compliant with industry functional safety standards, such products are intended to help enable customers to design and create their own applications that meet applicable functional safety standards and requirements. Using products in an application does not by itself establish any safety features in the application. Designers must ensure compliance with safety-related requirements and standards applicable to their applications. Designer may not use any TI products in life-critical medical equipment unless authorized officers of the parties have executed a special contract specifically governing such use. Life-critical medical equipment is medical equipment where failure of such equipment would cause serious bodily injury or death (e.g., life support, pacemakers, defibrillators, heart pumps, neurostimulators, and implantables). Such equipment includes, without limitation, all medical devices identified by the U.S. Food and Drug Administration as Class III devices and equivalent classifications outside the U.S.

TI may expressly designate certain products as completing a particular qualification (e.g., Q100, Military Grade, or Enhanced Product). Designers agree that it has the necessary expertise to select the product with the appropriate qualification designation for their applications and that proper product selection is at Designers' own risk. Designers are solely responsible for compliance with all legal and regulatory requirements in connection with such selection.

Designer will fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of Designer's non-compliance with the terms and provisions of this Notice.