

- Fiber Optic
- Slot Sensors
- Photoelectric**
- Laser
- Proximity
- Displacement
- Magnetic
- Contact
- Area
- Ultrasonic
- Vision
- Vibration
- Temperature
- Annexes

Guidance


Photoelectric

- Cylindrical
- Square
- Flat type
- Thin type
- BGS
- Transparent detection
- Color/Mark Detection
- TOF reflective
- IP69K high protection type
- Anti-glare type

Reflectors


Reflectors

STD-06




Thickness: 8mm

TD-04




Thickness: 8mm

TD-05




Thickness: 8mm

TD-09




Thickness: 8mm

TD-02




Thickness: 8mm

TD-08




Thickness: 8mm

TD-01




Thickness: 8mm

TD-03




Thickness: 8mm

TD-01-3

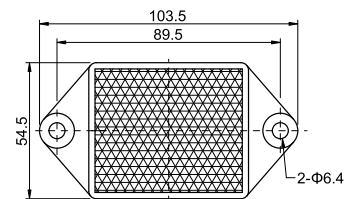

Thickness: 8mm

TD-10

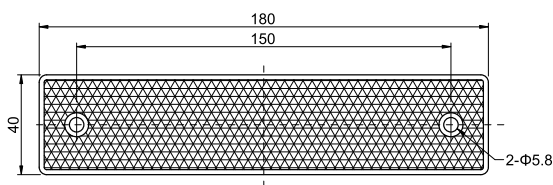


Thickness: 8mm

Reflectors


Dimensions

Unit: mm


TD-11




TD-12




TD-13




TD-14



TD-15



TD-22

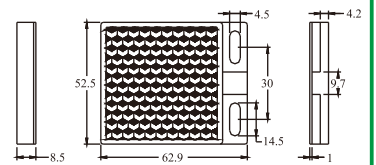

Fiber Optic

Slot Sensors

Photoelectric

Laser

Proximity

Displacement

Magnetic

Contact

Area

Ultrasonic

Vision

Vibration

Temperature

Annexes

Guidance

Photoelectric

Cylindrical

Square

Flat type

Thin type

BGS

Transparent detection

Color/Mark Detection

TOF reflective

IP69K high protection type

Anti-glare type

Reflectors

Reflectors