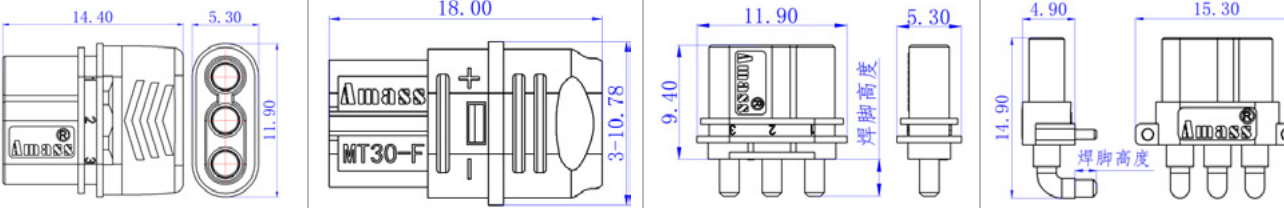


5A-20A 应用于控制器

产品图片 (Picture)				
产品图纸 (Drawing)				
产品型号 (Item No)	MR30-FB. G. Y ULCE	MT30-F. G. Y ULCE	MR30PB30-F. G. Y ULCE	MR30PW20-F. G. Y ULCE
	MR30-FB. N. B ULCE	MT30-F. N. B ULCE		MR30PW20-F. G. B ULCE
	MR30-FB. G. B ULCE	MT30-F. G. B ULCE		MR30PW30-F. G. Y ULCE
	MR30-FB. G. BL ULCE			

产品电气参数 (Parameter)				
耐电压 (Withstand voltage)	DC 500V			
额定电流 (Rated current)	15A/18#		15A	
瞬时电流 (Maxted current)	30A/18#		30A	
接触电阻 (Contact resistance)	1. 20mΩ			
插拔寿命 (Use times)	100times			
防打火 (Fireproof)	否			
带卡扣 (Buckle)	否			
接线推荐 (Connection recommendation)			PCB 板焊接标准 (PCB Board Welding Standard)	
AWG	温升 60℃	温升 85℃	PCB 板 + 焊盘厚度 : 1. 0-1. 2mm	焊脚高度 2. 0mm
16#	20A	25A	PCB 板 + 焊盘厚度 : 1. 6-2. 0mm	焊脚高度 3. 0mm
18#	15A	20A		
20#	10A	15A		