







### SPECIFICATION

Current Rating: 1.5 Amp  
 Insulation Resistance: 1000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65°C to +125°C  
 Contact Material: Brass  
 Insulator Material: PA6T,UL 94V-0 Black

### Ordering Code:

PHDS08 - X - X - T - A - B - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts  
03 To 120
- ③ Contact Plating:  
G0:Gold flash S0:Selective  
G1:3U" Gold S1:Selective 3u"  
G2:5u" Gold S2:Selective 5u"  
G3:10u" Gold S3:Selective 10u"  
G4:15u" Gold S4:Selective 15u"  
G5:30u" Gold S5:Selective 30u"  
SN:Tin
- ④ Connector Type  
T:Three
- ⑤ Pin Length:  
A:0400=4.00mm  
B:0280=2.80mm  
Please mark the desired length in the A/B
- ⑥ Insulator Material  
A:PBT  
B:PA6T  
C:LCP  
D:PA46  
E:PA9T
- ⑦ Packing  
A:Tray  
B:Bag  
T:Tube  
U:Tube+CAP  
R:Tape&Reel  
W:Tape&Reel+CAP

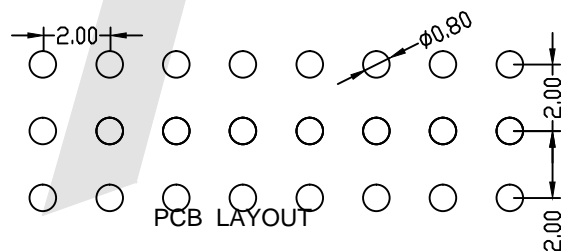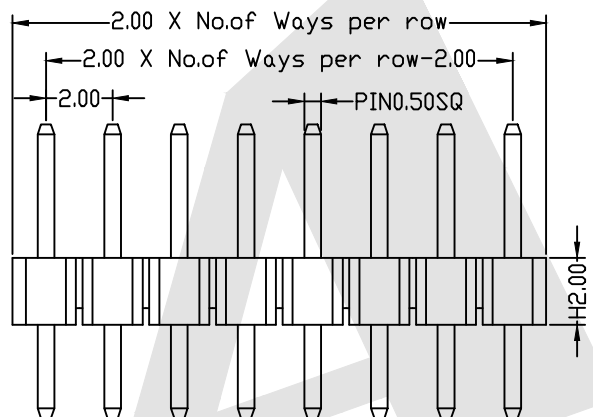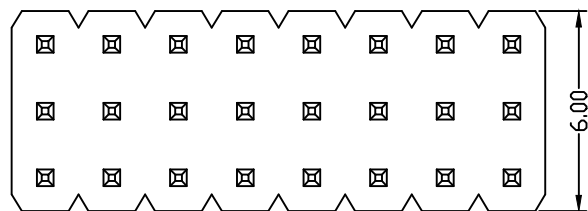

Standard IE P/N : PHDS08-10-G0-T-0400-0280-B-B

|                                      |             |
|--------------------------------------|-------------|
| Unless otherwise specified tolerance |             |
| A                                    | B           |
| 4.00                                 | 2.80        |
| SCALE:<br>As Shown                   | UNIT:<br>mm |

**Antenk** ANTEK ELECTRONICS CO., LTD  
[Http://www.antenk.com](http://www.antenk.com)  
 E-mail:sales@antenk.com

|     |                                      |            |
|-----|--------------------------------------|------------|
| REV | DESCRIPTION                          | DATE       |
|     | Increase packing method and material | 2016/10/25 |

|             |   |
|-------------|---|
| TITLE:      | 2.00mm Pin Header Three Row Straight Type |
| DRAWING NO: | PHDS08-XXT-0400-0280-XX                   |
| PRODUCT NO: | PHDS08-XXT-0400-0280-XX                   |

