

Cheemi Technology Co., Ltd

规格承认书

APPROVAL SHEET

客户名称 CUSTOMER :

产品名称 PART NAME :

产品规格 PART NUMBER :

产品编号 PRODUCTCODE:

版次 REV.NO:

日期 DATE:

CMNTCD 测温型 NTC 热敏电阻器CMNTCD
Series Temp Measurement NTC Thermistor

CMNTCD 104F425028L0050

B0

2023-9-18

确认

CONFIRM

客户 CLIENT		供货商/制造商 MANUFACTOR	
品保部 Quality Dep.		规格书制作 Design	刘星月
制造部 Production Dep.		业务部审核 Checked by sales	
工程部 Engineering Dep.		技术部审核 Checked by R&D	程鹏
		品质部审核 Checked by QA	李少媛

Cheemi Technology Co., Ltd

地址: 江苏省南京市栖霞区科创路1号金港科创园一期6幢3楼304 邮编 Postcode: 210046

Address: 3/F, Building 6, Jingang Science and Technology Innovation Park, No.1 Kechuang Road,

Qixia District, Nanjing City, Jiangsu Province

Http: //www.cheemi-tech.com

TEL: 025-85996365

E-MAIL: info@cheemi-tech.com

变更记录表

REVISED RECORD SHEET

[illegible]

1、产品型号说明 Product model specification

CMNTC D 104 F 4250 28 L 0050
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① CMNTC: 测温型 NTC 热敏电阻器系列 (Series Temp Measurement NTC Thermistor)
- ② D: 指引线为常温导线 (The lead wire is normal temperature wire)
- ③ 104: 25℃ 的零功率电阻值 100KΩ (Zero Power Resistance at 25℃ is 100KΩ)
- ④ F: 阻值精度代码 F-±1% G-±2% H-±3% J-±5% (Resistance precision code F-±1% G-±2% H-±3% J-±5%)
- ⑤ 4250: B25/50 值 4250K (B25/50:4250K)
- ⑥ 28: 线材规格: 28# 电子线 (Wire type: 28# electronic wire)
- ⑦ L: 测量线材长度方式: L 指线长 Z 指总长 (Method of measuring Wire length: L=Line length Z=Total length)
- ⑧ 0050: 线材长度 0050=50mm。 (Wire length 0050=50mm)


2、电气性能 Electrical Characteristics

No.	项目 Item	符号 Symbol	测试条件 Test conditions	单位 Unit	性能要求 Requirements
2.1	25℃ 的零功率电阻值 Zero Power Resistance at 25℃	R _{25℃}	Ta=25±0.01℃ Test Power≤0.1mW	KΩ	100KΩ±1%
2.2	B 值 B-value	B _{25/50}	$B=[(T_a \times T_b)/(T_b - T_a)] \times \ln(R_a/R_b)$ Ta=25±0.01℃ T _b =50℃±0.01℃	K	4250±1%
2.3	耗散系数 Thermal dissipation Coefficient	δ	静止空气中 In still air	mW/℃	约 2
2.4	时间常数 Thermal time constant	τ	静止空气中 In still air	sec	约 7
2.6	绝缘电阻 Insulation resistance	/	100V/DC 1min	MΩ	≥100
2.7	NTC 核心元件工作温度范围 NTC core element temperature	/	/	℃	-40℃ ~ 125℃
2.8	工作温度范围 Operating temperature range	/	/	℃	-20℃ ~ 105℃
2.9	最大额定功率 Maximum rated power	P _{max}	/	mW	100
2.10	阻温特性 R&T-table	/	/	/	见附表 I See attached table I
2.11	阻值误差&B 值误差 Resistance tolerance& B-value tolerance	/	/	/	见附表 II See attached table II

3、产品图纸 Product drawing

产品图纸 Product drawing		客户 确认 Customer confirm	客户名称 Customer:			
			确认 Confirm		日期 DATE	
产品型号 MODEL NO.	CMNTCD 104F425028L0050		审核 Approve:		日期 DATE	

尺寸 Dimensions: (Unit: mm)

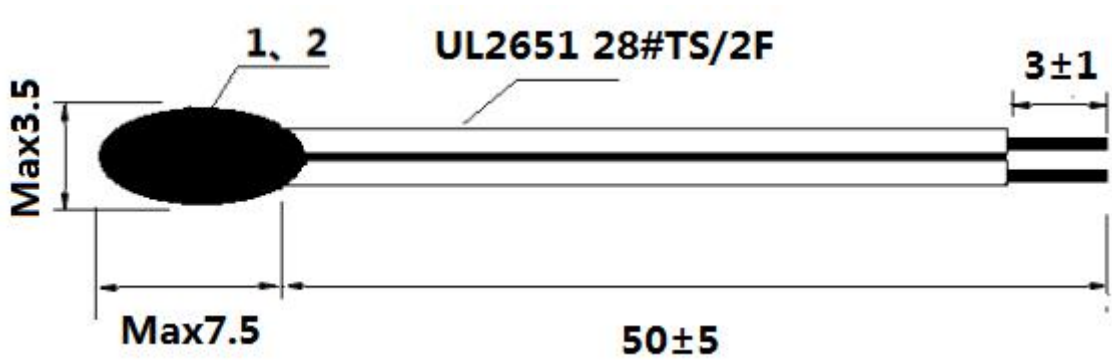

技术要求 Technical requirements:

- 1) 零功率阻值: R25: 100K Ω ± 1% (Zero Power Resistance: R25: 100KΩ±1%);
- 2) B25/50 数值: 4250K ± 1% (B-value: B25/50: 4250K±1%);
- 3) 绝缘电阻: 100V/DC ≥ 100MΩ (Insulation resistance: 100V/DC ≥ 100MΩ);
- 4) 符合 RoHS 环保要求 (Meet environmental protection requirements: RoHS)。

材料规格 Material specifications				
No.	名称 Name	材料规格 Material specifications	数量 Quantity	备注 note
1	核心元件 Core element	热敏电阻芯片 100K Ω	1	
2	包封类 Coating material	环氧树脂	/	黑色 Black
3	电子线 Electronic wire	UL2651 28#TS/2F	1	黑色 Black
4				
5				
6				

更新履历 Revised record sheet				
版本 REV. NO	更新时间 REV. DATE	更新内容 Change content	申请人 Applicant	批准人 Approved
B0		版本发行		

4、可靠性 Reliability

No.	项目 Item	试验标准	试验条件及方法 Test conditions and methods	性能要求 Requirements
4.1	引出端强度 Terminal strength	IEC60068-2-21	固定电阻端, 拉力: 5 ± 1 N, 时间: 10 ± 1 秒 Fixed resistor end, Pull strength: 5 ± 1 N, time: 10 ± 1 sec	无可见性损伤 No obvious damage $ \Delta R_{25}/R_{25} \leq \pm 2\%$
4.2	可焊性 Solderability	IEC60068-2-20	温度 $245 \pm 5^\circ\text{C}$ 时间 2-3 秒 temperature : $245 \pm 5^\circ\text{C}$ for 2-3sec	着锡面积 $\geq 95\%$ Coverage area $\geq 95\%$.
4.3	稳态湿热 Steady humidity and heat	IEC60068-2-78	温度: $40^\circ\text{C} \pm 2^\circ\text{C}$, 湿度: $93 \pm 2\%$, 时间: 500 小时 Temp: $40^\circ\text{C} \pm 2^\circ\text{C}$, humidity: $93 \pm 2\%$, Time : 500hrs	无可见性损伤 No obvious damage $ \Delta R_{25}/R_{25} \leq \pm 2\%$
4.4	温度快速变化 Rapid changes in temperature	IEC60068-2-14	-20°C 30min $\rightarrow$ 25°C 5min $\rightarrow$ 105°C 30min $\rightarrow$ 25°C 5min, 5cycles	无可见性损伤 No obvious damage $ \Delta R_{25}/R_{25} \leq \pm 2\%$
4.5	高温储存 High temperature storage	IEC60068-2-2	温度: $105^\circ\text{C} \pm 5^\circ\text{C}$ 时间: 1000 小时 Temp : $105^\circ\text{C} \pm 5^\circ\text{C}$, Time : 1000hrs	无可见性损伤 No obvious damage $ \Delta R_{25}/R_{25} \leq \pm 2\%$
4.6	低温储存 Low temperature storage	IEC60068-2-1	温度: -20°C 时间: 1000 小时 Temp : -20°C , Time : 1000hrs	无可见性损伤 No obvious damage $ \Delta R_{25}/R_{25} \leq \pm 2\%$

- ▲注: 1) 稳态湿热及温度快速变化试验结束后, 样品需在常温环境下静置 2 小时后再做性能测试;
 ▲Note: 1) After the test of steady-state humid heat and rapid temperature change, the sample should be kept for 2 hours at room temperature before performance test ;
 2) 高温存储及低温存储结束后, 需随测试环境自然恢复至常温, 再取出做性能测试。
 2) After the test of high - and low-temperature storage is complete, and then take it out for performance test when the test environment naturally regain to normal temperature.

5、产品包装 Product packaging

5.1 包装方式 Packing Type

■ 散装方式 Bulk Type □ 盒装方式 Boxed Type □ 盘装方式 Reel Type

5.2 包装规格 Packing specification

No.	包装规格 Packing specification	包装材料、尺寸 Packing material, size	产品数量 Quantity
1	包装袋 Packing bag	热封口袋(Heat sealing bag) $W \times H = XXX\text{mm} \times XXX\text{mm}$	
2	内包装盒 Inner box	纸箱(Carton), $L \times W \times H = XXX\text{mm} \times XXX\text{mm} \times XXX\text{mm}$	
3	外包装箱 Outer carton	纸箱(Carton), $L \times W \times H = XXX\text{mm} \times XXX\text{mm} \times XXX\text{mm}$	

6、存储&运输要求 STORAGE & Transportation Requirements

6.1 存储环境要求 Storage environment requirements

6.1.1 储存温度: $-10^{\circ}\text{C} \sim 40^{\circ}\text{C}$; 储存湿度: $\leq 75\% \text{ RH}$

(Storage temperature: $-10^{\circ}\text{C} \sim 40^{\circ}\text{C}$; storage humidity: $\leq 75\% \text{ RH}$);

6.1.2 避免存放在具有腐蚀性物质及气体的环境中、光照及辐射源的环境下

(Avoid storage in the environment of corrosive substances and gas, light and radiation source);

6.1.3 包装打开后需重新密封保存, 贮存期 1 年, 超过贮存期, 可按本标准规定的项目重新检验, 如符合要求仍可使用

(After the package is opened, it should be re-sealed and stored for one year. If the storage period exceeds, it can be retested according to the items specified in this sheet. If it meets the requirements, it can still be used).

6.2 运输要求 Transportation requirements

6.2.1 存储或运输过程中, 产品叠放高度不超过 4 箱产品

(During storage or transportation, the height of stacked products should not exceed the height of 4 boxes);

6.2.2 避免产品在运输过程中强烈碰撞和跌落

(Avoid strong collision and fall during transportation);

6.2.3 产品运输方式不限, 但需要避免雨水、雪、冰雹、海水的直接或间接淋袭

(The transportation method is not limited, but the direct or indirect attack of rain, snow, hail and sea water should be avoided).

7、安装&使用注意事项 Installation & Use precautions

7.1 本产品的用途: 温度测量与控制

(Usage of this product: Temperature measurement and control);

7.2 本产品适用于常规家用、工业产品上, 如果用于特殊设备/装置如: 航空航天、深海探测、医疗、军用、新能源电源、铁道交通、消防、交通信号等设备上, 请联系我司人员对相应的要求进行确认

(This product is used for conventional household and industrial products. If used in special equipment/device such as: aerospace, deep sea exploration, medical, military, new energy power supply, railway traffic, fire control, traffic signals and other equipment, please contact our staff to confirm the corresponding requirements).

7.3 产品使用的最大工作温度, 最大功率等, 依照规格书要求作业, 不可超出规格书范围

(The maximum working temperature, maximum power, etc. of the product shall be operated in accordance with the requirements of the specification, and shall not exceed the scope of the specification).

7.4 设计使用时, 避免过大的电流引起元件自身发热而产生测量误差

(When designing and using, avoid measuring error caused by excessive current);

7.5 产品外观发现变形、破损时, 不建议使用, 可能会影响产品电气性能

(If the product is deformed or damaged, do not use it. Otherwise, the electrical performance may be affected);

7.6 烙铁焊接时, 焊接处距包封头部距离至少 2mm, 焊接温度应低于 360°C , 焊接时间 $< 3\text{sec}$

(When soldering by soldering iron, the distance between the welding place and the coating head should be at least 2mm, the welding temperature should be lower than 360°C , and the welding time should be less than 3sec);

7.7 如在加工过程中需使用热缩管, 热缩管热缩时不可使用电吹风进行吹制, 建议热缩工艺, 将套好热缩管后的产品放入恒温烘箱中, 按 $110^{\circ}\text{C}/10 \sim 12\text{min}$ 进行热缩

(If the heat shrinkable tube is used in the manufacturing process, do not use a hair dryer to shrink the tube. This is a recommended heat shrinkable process that puts the product covered shrinkable tube into a constant temperature oven, and shrink them at $110^{\circ}\text{C}/10 \sim 12\text{min}$);

7.8 一般不建议做注塑加工, 因为注塑工艺的高温 and 高压会直接影响产品性能, 本产品如果采用注塑工艺加工, 需与我司确认具体的注塑工艺参数

(Generally, injection molding is not recommended, because the high temperature and high pressure of injection molding process will directly affect the product performance. If the product is processed by injection molding process, it is necessary to confirm the specific injection molding process parameters with our company);

7.9 产品核心芯片为陶瓷半导体，在使用过程中避免挤压或对环氧端头物理撞击，以免造成产品损伤

(The core chip of the product is a ceramic semiconductor. Avoid extrusion or physical impact on the epoxy end in the process of use, so as not to cause product damage) ;

7.10 产品引线需剪短加工时，裁剪处距环氧端头距离应不小于 10mm，且裁切时夹紧端头处

(When the product leads need to be cut short, the cutting distance from the epoxy end should be no less than 10mm, and the end should be clamped when cutting) 。

7.11 如产品需要引线折弯时，折弯半径应不小于 1mm，折弯角度为 90°，折弯次数依引线直径大小存在差异，需与我司确认

(If the product needs lead bending, bending radius should not be less than 1mm, bending angle is 90° . Bending times vary according to the lead diameter and need to be confirmed with our company) ;

7.12 本产品采用环氧树脂封装，具有一般的防水性，若使用环境湿度>80%RH 或长期浸泡水中会导致封装端头渗水，造成绝缘和阻值性能偏低，如有相关的要求需与我司联系，产品增加防水层保护

(This product is encapsulated with epoxy resin, which is generally waterproof. If the ambient humidity is more than 80%RH or the product has long-term immersion in water, water seepage will occur at the end of the epoxy head, resulting in low insulation and resistance performance. If you have relevant requirements, please contact our company and add waterproof layer to the product) 。

8、产品认证 Product certification

No.	项目 Projects	产品认证 Product certification
8.1	质量管理体系认证 Quality Management System Certification	ISO9001:2015
		IATF16949: 2016
8.2	环境管理体系认证 Environmental Management System Certification	ISO14001:2015
8.3	环保检测报告 Environmental test report	RoHS 2.0
8.4	江苏省高新技术产品认证 High-tech product certificate in Jiangsu Province	
8.5	产品 CQC 认证 (CQC07001019008) CQC certificate (CQC07001019008)	
8.6	TUV 认证 (R50245893) TUV certificate (R50245893)	

附表 I (Attachment I)

Cheemi Technology Co., Ltd (Resistance Thermometer)							
R25=100K Ω 精度: $\pm 1\%$				B25/50=4250K 精度: $\pm 1\%$ (P195)			
温度 ($^{\circ}\text{C}$)	电阻 (K Ω)			电阻精度 (%)		温度精度 ($^{\circ}\text{C}$)	
	最小值	中心值	最大值	ΔR	$-\Delta R$	ΔT	$-\Delta T$
-55	9709.07	10289	10868.9	5.636	-5.636	0.712	-0.712
-54	8975.47	9503.57	10031.6	5.556	-5.556	0.708	-0.708
-53	8320.78	8803.21	9285.65	5.48	-5.48	0.704	-0.704
-52	7731.6	8173.45	8615.29	5.405	-5.405	0.701	-0.701
-51	7197.5	7603	8008.5	5.333	-5.333	0.697	-0.697
-50	6710.29	7083.03	7455.78	5.262	-5.262	0.693	-0.693
-49	6263.51	6606.58	6949.64	5.192	-5.192	0.689	-0.689
-48	5852.01	6168.06	6484.11	5.123	-5.123	0.685	-0.685
-47	5471.61	5762.99	6054.36	5.055	-5.055	0.681	-0.681
-46	5118.94	5387.71	5656.48	4.988	-4.988	0.676	-0.676
-45	4791.22	5039.23	5287.24	4.921	-4.921	0.672	-0.672
-44	4486.12	4715.04	4943.95	4.855	-4.855	0.668	-0.668
-43	4201.68	4413.01	4624.34	4.788	-4.788	0.663	-0.663
-42	3936.23	4131.34	4326.46	4.722	-4.722	0.659	-0.659
-41	3688.32	3868.47	4048.62	4.656	-4.656	0.654	-0.654
-40	3456.65	3623	3789.34	4.591	-4.591	0.65	-0.65
-39	3240.1	3393.7	3547.29	4.525	-4.525	0.645	-0.645
-38	3037.64	3179.46	3321.29	4.46	-4.46	0.64	-0.64
-37	2848.33	2979.28	3110.24	4.395	-4.395	0.635	-0.635
-36	2671.31	2792.23	2913.15	4.33	-4.33	0.631	-0.631
-35	2505.79	2617.45	2729.11	4.265	-4.265	0.626	-0.626
-34	2351.03	2454.14	2557.25	4.201	-4.201	0.621	-0.621
-33	2206.34	2301.56	2396.78	4.137	-4.137	0.616	-0.616
-32	2071.08	2159.02	2246.96	4.073	-4.073	0.611	-0.611


-31	1944.63	2025.86	2107.08	4.009	-4.009	0.606	-0.606
-30	1826.43	1901.46	1976.49	3.946	-3.946	0.6	-0.6
-29	1715.93	1785.26	1854.58	3.882	-3.882	0.595	-0.595
-28	1612.65	1676.7	1740.75	3.82	-3.82	0.59	-0.59
-27	1516.09	1575.29	1634.48	3.757	-3.757	0.585	-0.585
-26	1425.82	1480.53	1535.25	3.695	-3.695	0.579	-0.579
-25	1341.41	1392	1442.58	3.633	-3.633	0.574	-0.574
-24	1262.48	1309.25	1356.03	3.572	-3.572	0.568	-0.568
-23	1188.65	1231.91	1275.17	3.511	-3.511	0.563	-0.563
-22	1119.57	1159.6	1199.62	3.451	-3.451	0.557	-0.557
-21	1054.94	1091.97	1129	3.391	-3.391	0.551	-0.551
-20	994.446	1028.71	1062.98	3.331	-3.331	0.546	-0.546
-19	937.8	969.523	1001.24	3.272	-3.272	0.54	-0.54
-18	884.744	914.117	943.489	3.213	-3.213	0.534	-0.534
-17	835.034	862.235	889.437	3.154	-3.154	0.528	-0.528
-16	788.44	813.637	838.833	3.096	-3.096	0.522	-0.522
-15	744.752	768.095	791.438	3.039	-3.039	0.516	-0.516
-14	703.77	725.401	747.031	2.981	-2.981	0.51	-0.51
-13	665.312	685.359	705.406	2.925	-2.925	0.503	-0.503
-12	629.205	647.788	666.371	2.868	-2.868	0.497	-0.497
-11	595.292	612.52	629.749	2.812	-2.812	0.491	-0.491
-10	563.425	579.4	595.374	2.757	-2.757	0.484	-0.484
-9	533.467	548.28	563.094	2.701	-2.701	0.478	-0.478
-8	505.29	519.029	532.767	2.646	-2.646	0.471	-0.471
-7	478.777	491.519	504.262	2.592	-2.592	0.465	-0.465
-6	453.817	465.637	477.457	2.538	-2.538	0.458	-0.458
-5	430.31	441.274	452.238	2.484	-2.484	0.451	-0.451
-4	408.16	418.33	428.501	2.431	-2.431	0.444	-0.444
-3	387.279	396.714	406.148	2.378	-2.378	0.437	-0.437

-2	367.586	376.338	385.089	2.325	-2.325	0.43	-0.43
-1	349.006	357.123	365.241	2.273	-2.273	0.423	-0.423
0	330.116	337.6	345.083	2.216	-2.216	0.417	-0.417
1	314.905	321.887	328.869	2.169	-2.169	0.409	-0.409
2	299.258	305.732	312.206	2.117	-2.117	0.402	-0.402
3	284.47	290.472	296.474	2.066	-2.066	0.394	-0.394
4	270.487	276.051	281.615	2.015	-2.015	0.387	-0.387
5	257.262	262.418	267.574	1.964	-1.964	0.379	-0.379
6	244.748	249.525	254.302	1.914	-1.914	0.372	-0.372
7	232.902	237.326	241.751	1.864	-1.864	0.364	-0.364
8	221.685	225.782	229.878	1.814	-1.814	0.357	-0.357
9	211.06	214.851	218.643	1.764	-1.764	0.349	-0.349
10	200.991	204.5	208.008	1.715	-1.715	0.341	-0.341
11	191.448	194.692	197.936	1.666	-1.666	0.333	-0.333
12	182.399	185.398	188.396	1.617	-1.617	0.325	-0.325
13	173.817	176.587	179.357	1.568	-1.568	0.317	-0.317
14	165.674	168.231	170.789	1.52	-1.52	0.309	-0.309
15	157.946	160.306	162.665	1.471	-1.471	0.301	-0.301
16	150.61	152.786	154.961	1.423	-1.423	0.293	-0.293
17	143.645	145.649	147.653	1.376	-1.376	0.284	-0.284
18	137.029	138.873	140.718	1.328	-1.328	0.276	-0.276
19	130.743	132.44	134.136	1.28	-1.28	0.268	-0.268
20	124.771	126.329	127.888	1.233	-1.233	0.259	-0.259
21	119.094	120.524	121.954	1.186	-1.186	0.25	-0.25
22	113.697	115.008	116.319	1.139	-1.139	0.242	-0.242
23	108.565	109.765	110.965	1.093	-1.093	0.233	-0.233
24	103.684	104.781	105.878	1.046	-1.046	0.223	-0.223
25	99	100	101	1	-1	0.214	-0.214
26	94.536	95.535	96.534	1.045	-1.045	0.229	-0.229

27	90.251	91.247	92.243	1.091	-1.091	0.239	-0.239
28	86.177	87.168	88.16	1.137	-1.137	0.25	-0.25
29	82.302	83.287	84.272	1.182	-1.182	0.262	-0.262
30	78.615	79.593	80.57	1.228	-1.228	0.273	-0.273
31	75.107	76.076	77.045	1.273	-1.273	0.285	-0.285
32	71.769	72.728	73.687	1.318	-1.318	0.296	-0.296
33	68.592	69.54	70.488	1.363	-1.363	0.308	-0.308
34	65.567	66.503	67.44	1.407	-1.407	0.32	-0.32
35	62.687	63.611	64.535	1.452	-1.452	0.331	-0.331
36	59.944	60.855	61.766	1.496	-1.496	0.343	-0.343
37	57.332	58.229	59.126	1.54	-1.54	0.355	-0.355
38	54.844	55.727	56.61	1.584	-1.584	0.367	-0.367
39	52.473	53.341	54.21	1.628	-1.628	0.379	-0.379
40	50.213	51.067	51.921	1.672	-1.672	0.391	-0.391
41	48.06	48.899	49.738	1.715	-1.715	0.404	-0.404
42	46.008	46.831	47.655	1.758	-1.758	0.416	-0.416
43	44.051	44.859	45.667	1.801	-1.801	0.428	-0.428
44	42.185	42.978	43.771	1.844	-1.844	0.441	-0.441
45	40.406	41.183	41.96	1.887	-1.887	0.453	-0.453
46	38.709	39.471	40.232	1.929	-1.929	0.466	-0.466
47	37.09	37.836	38.582	1.971	-1.971	0.479	-0.479
48	35.545	36.276	37.007	2.014	-2.014	0.492	-0.492
49	34.071	34.787	35.502	2.056	-2.056	0.504	-0.504
50	32.665	33.365	34.064	2.097	-2.097	0.517	-0.517
51	31.322	32.007	32.691	2.139	-2.139	0.53	-0.53
52	30.04	30.709	31.379	2.18	-2.18	0.543	-0.543
53	28.816	29.471	30.125	2.221	-2.221	0.557	-0.557
54	27.647	28.287	28.927	2.262	-2.262	0.57	-0.57
55	26.53	27.156	27.781	2.303	-2.303	0.583	-0.583

56	25.463	26.075	26.686	2.344	-2.344	0.596	-0.596
57	24.444	25.041	25.639	2.384	-2.384	0.61	-0.61
58	23.47	24.053	24.637	2.425	-2.425	0.623	-0.623
59	22.539	23.109	23.679	2.465	-2.465	0.637	-0.637
60	21.649	22.206	22.762	2.504	-2.504	0.651	-0.651
61	20.799	21.342	21.885	2.544	-2.544	0.664	-0.664
62	19.985	20.515	21.045	2.584	-2.584	0.678	-0.678
63	19.207	19.724	20.242	2.623	-2.623	0.692	-0.692
64	18.462	18.967	19.472	2.662	-2.662	0.706	-0.706
65	17.75	18.243	18.736	2.701	-2.701	0.72	-0.72
66	17.069	17.549	18.03	2.74	-2.74	0.734	-0.734
67	16.416	16.886	17.355	2.778	-2.778	0.748	-0.748
68	15.792	16.25	16.708	2.817	-2.817	0.762	-0.762
69	15.194	15.641	16.087	2.855	-2.855	0.777	-0.777
70	14.622	15.057	15.493	2.893	-2.893	0.791	-0.791
71	14.073	14.498	14.923	2.931	-2.931	0.806	-0.806
72	13.548	13.963	14.377	2.969	-2.969	0.82	-0.82
73	13.045	13.449	13.854	3.006	-3.006	0.835	-0.835
74	12.563	12.957	13.352	3.043	-3.043	0.849	-0.849
75	12.101	12.485	12.87	3.08	-3.08	0.864	-0.864
76	11.658	12.033	12.408	3.117	-3.117	0.879	-0.879
77	11.233	11.599	11.965	3.154	-3.154	0.894	-0.894
78	10.826	11.182	11.539	3.191	-3.191	0.909	-0.909
79	10.435	10.783	11.131	3.227	-3.227	0.924	-0.924
80	10.06	10.4	10.739	3.263	-3.263	0.939	-0.939
81	9.7	10.032	10.363	3.299	-3.299	0.954	-0.954
82	9.355	9.678	10.001	3.335	-3.335	0.969	-0.969
83	9.024	9.339	9.654	3.371	-3.371	0.985	-0.985
84	8.706	9.013	9.32	3.406	-3.406	1	-1

85	8.401	8.701	9	3.442	-3.442	1.016	-1.016
86	8.108	8.4	8.692	3.477	-3.477	1.031	-1.031
87	7.826	8.111	8.396	3.512	-3.512	1.047	-1.047
88	7.556	7.834	8.112	3.547	-3.547	1.062	-1.062
89	7.296	7.567	7.838	3.581	-3.581	1.078	-1.078
90	7.046	7.31	7.575	3.616	-3.616	1.094	-1.094
91	6.806	7.064	7.322	3.65	-3.65	1.11	-1.11
92	6.575	6.827	7.078	3.684	-3.684	1.126	-1.126
93	6.353	6.599	6.844	3.718	-3.718	1.142	-1.142
94	6.14	6.379	6.619	3.752	-3.752	1.158	-1.158
95	5.935	6.168	6.402	3.786	-3.786	1.174	-1.174
96	5.737	5.965	6.193	3.819	-3.819	1.191	-1.191
97	5.547	5.769	5.992	3.853	-3.853	1.207	-1.207
98	5.364	5.581	5.798	3.886	-3.886	1.223	-1.223
99	5.188	5.4	5.612	3.919	-3.919	1.24	-1.24
100	5.019	5.226	5.432	3.952	-3.952	1.256	-1.256
101	4.856	5.057	5.259	3.985	-3.985	1.273	-1.273
102	4.699	4.896	5.092	4.017	-4.017	1.29	-1.29
103	4.548	4.74	4.932	4.05	-4.05	1.307	-1.307
104	4.402	4.589	4.777	4.082	-4.082	1.323	-1.323
105	4.262	4.444	4.627	4.114	-4.114	1.34	-1.34

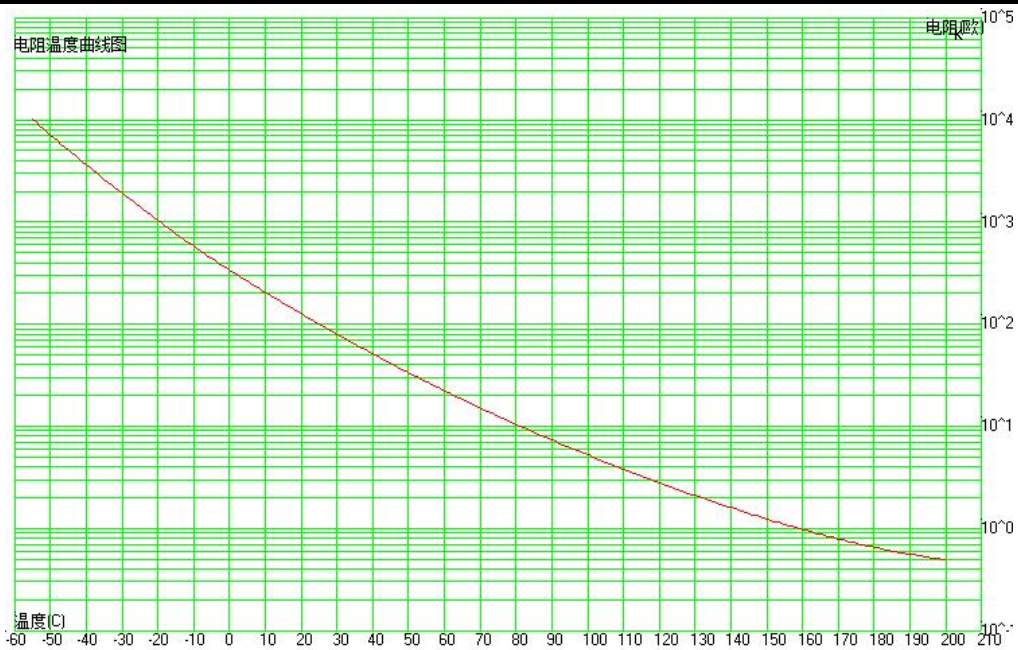

附表 II (Attachment II)

