
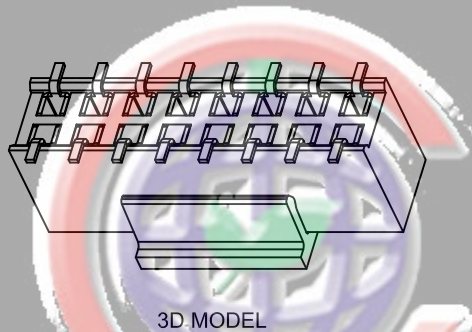


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 01/24/08'		LJC 01/24/08'
D	DRAWING UPDATE	JLZ 12/29/18'		

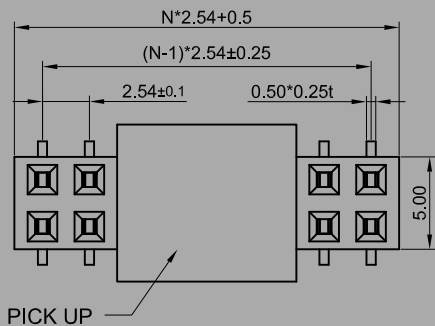

**Notes:**

**Specifications:**

- Contact Resistance: 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
- Current Rating: 3A.
- Voltage Rating: 250V AC rms.
- Temperature: -40°C~+105°C.


**Materials:**

- Contact Material: Copper Alloy.
- Contact Plating: Gold Plating Over Nickel.
- Insulator Materials: High Temp, Black, UL94-V0.


**Product Number Code:**

DS1023-11 - X X X X X X

- POST SUPPORT  
S: W/ POST  
X: W/O POST
- PACKING TYPE  
R: TAPE ON REEL  
B: TUBE
- PICK UP SUPPORT  
S: W/  
X: W/O
- CONTACT PLATING  
8: FULL GLOD FLASH
- HOUSING COLOR  
B: BLACK
- NO.OF CONTACTS  
2x2 - 2x40

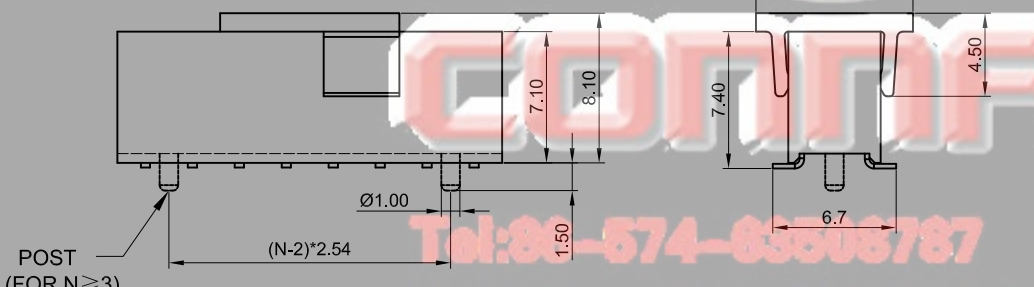

N=NUMBER OF CONTACTS/2

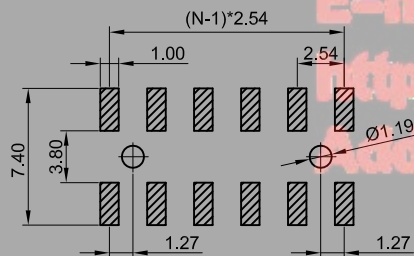

RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE	FEMALE HEADER PITCH	
		2.54mm SMT TYPE H=7.1mm	
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	DS1023-11 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1023-11-XXXXXX-D		

**晨翔电子有限公司**  
**CONNFLY CONNELY ELECTRONIC CO. LTD**

1 2 3 4 5 6 7 8