


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 11/05/08'		LJC 11/05/08'
B	ADD PACKING TYPE	YCH 11/18/13'		LJC 11/18/13'
C	DRAWING UPDATE	JLZ 01/18/18'	HZW 01/18/18'	LJC 01/18/18'
D	DRAWING UPDATE	JLZ 02/13/19'		

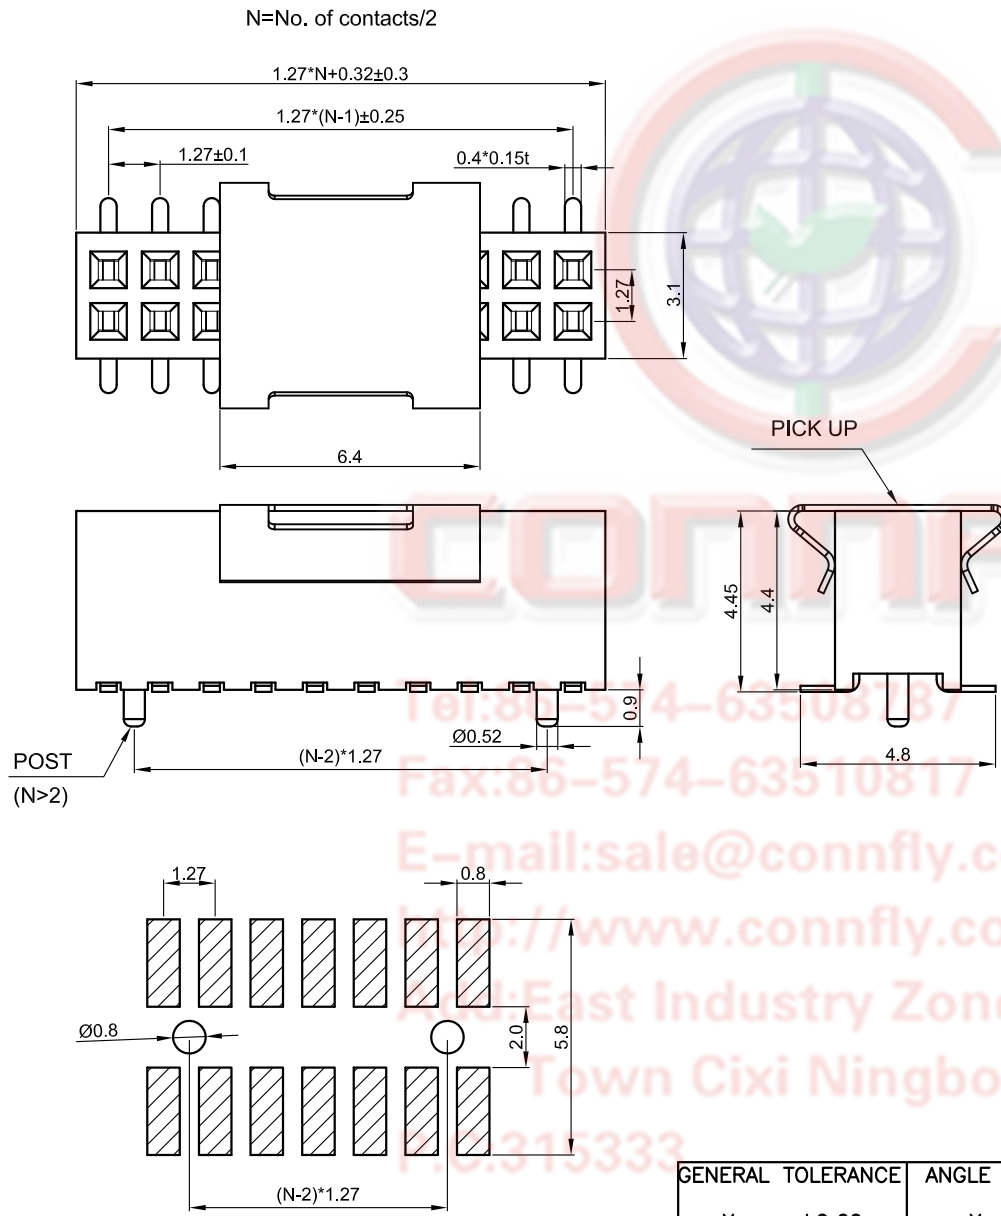

Notes:

Specifications:

- Contact Resistance: 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding Voltage: 300V AC(rms) For 1 Minute.
- Current Rating:1A.
- Temperature: -40°C~+105°C.

Materials:

- Contact Material: Copper Alloy.
- Contact Plating: Gold Plating Over Nickel.
- Insulator Materials: PA-9T,Black,UL94-V0.

Product Number Code:

DS1065-05 - X X X X X X X X

- POST SUPPORT
- S:W/ POST
- N/A CODE:W/O POST
- PACKING TYPE
- R:TAPE ON REEL
- B:TUBE
- PICK UP SUPPORT
- S:W/ PICK UP
- X:W/O PICK UP
- MOUNTING TYPE
- S:SMT TYPE
- HOUSING COLOR
- B:BLACK
- CONTACT PLATING
- 8: FULL GOLD FLASH
- CONNECTOR TYPE
- S:SOCKET
- No.OF CONTACTS
- 2x2-2x40

RECOMMEND PCB LAYOUT
(TOLERANCE ±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1065-05-XXXXX-D		

PROJECTION		TITLE	FEMALE HEADER PITCH 1.27mm
UNITS	mm		S.M.T TYPE
SHEET SIZE	A4	SERIES	DS1065-05 SERIES

晨翔电子有限公司
CONNELY CONNELY ELECTRONIC CO. LTD

1 2 3 4 5 6 7 8