



# IPS Series

## Industrial Pressure Transducer - Ceramic



- Piezo-resistive thick film ceramic sensor
- Stainless steel body
- Accuracy  $\leq \pm 0.25\%$  FS BFSL
- Various outputs including mV, Volts and mA.
- Pressure ranges from -1 to 400 bar

The IPS series is suitable for use in a wide range of industrial applications. The probe uses a piezo-resistive ceramic sensor, giving excellent media compatibility within a stainless steel housing

The electronics incorporate a microprocessor based amplifier, requiring no adjusting and giving stable electronics, especially industrial applications..

Each device is temperature compensated, calibrated and supplied with a traceable serial number and calibration certificate.

### Electrical Protection

Supply reverse polarity	No damage/no function
Electromagnetic compatibility	CE Compliant

### Performance

Accuracy (Non-Linearity & Hysteresis)	$\leq \pm 0.25\%$ / FS (BFSL)
Setting Errors (offsets)	2-wire Zero & Full Scale, $\leq \pm 0.5\%$ / FS
	3-wire Zero & Full Scale, $\leq \pm 0.5\%$ / FS
	4-wire Zero & Full Scale, $\leq \pm 0.5\%$ / FS @ 10 Volts

### Mechanical Stability

Shock	100g / 11s
Vibration	10g RMS (20 - 2000Hz)

### Material Specifications

Housing	303 Stainless Steel
"O" ring seals	Viton
Diaphragm	Ceramic Al <sub>2</sub> O <sub>3</sub> 96%
Media wetted parts diaphragm	Housing & connection, "O" ring seal,
Weight	Approx 100g
Installation position	Any
Operational Life	> 100x 10 <sup>6</sup> cycles
Insulation resistance	> 50MΩ at 50Vdc

### Temperatures & Thermal Effects

Media Temperature	-40°C to +135°C
Ambient Temperature	-20°C to +80°C
Storage temperature	-40°C to +125°C
Compensated temperature range	+20°C to +80°C
Thermal Zero Shift (TZS)	$\leq \pm 0.04\%$ /FS/°C
Thermal Span Shift	$\leq \pm 0.015\%$ /°C

### Pressure Ranges and Passive mV/V Outputs

Nominal Pressure, Gauge, bar	1	2	5	10	20	50	100	250	400
Compound range bar	-1 to 0	-1 to 2	-1 to 5	-1 to 9	-1 to 19	-1 to 24			
Permissible Overpressure bar	2	4	10	20	40	100	200	400	650
Burst Pressure bar	4	5	12	25	50	120	250	500	650

### Output Signals and Supply Voltages

Wire system	Output	Supply Voltage	Connection	Pin Nos
2-wire	4-20mA	9-32Vdc	+ve Supply	Pin 1 -ve Supply Pin 2 Ground Earth Pin
3-wire	0-5Vdc	9-32Vdc	+ve Supply	Pin 1 -ve Supply Pin 2 +ve Output Pin 3 Ground Earth Pin
4-wire (amplified)	10mV/V (ratiometric)	3-12Vdc	+ve Supply	Pin 1 -ve Supply Pin 2 +ve Output Pin 3 -ve Output Earth Pin

Cynergy3 Components Ltd.  
7 Cobham Road  
Ferndown Industrial Estate  
Wimborne, Dorset BH21 7PE  
Telephone +44 (0) 1202 897969

Email:sales@cynergy3.com

ISO9001 CERTIFIED

www.cynergy3.com




# IPS Series

## Industrial Pressure Sensor - Ceramic

Part Number	Pressure Rating	Output
IPS-G1000-3	0 - 1 Bar G	0 - 100mV
IPS-G1000-5	0 - 1 Bar G	4 - 20mA
IPS-G1000-6	0 - 1 Bar G	0 - 5V
IPS-G6000-3	0 - 6 Bar G	0 - 100mV
IPS-G6000-5	0 - 6 Bar G	4 - 20mA
IPS-G6000-6	0 - 6 Bar G	0 - 5V
IPS-GM1P9-5	-1 to +9 Bar G	4 - 20mA
IPS-GM1P9-6	-1 to +9 Bar G	0 - 5V
IPS-G1002-3	0 - 10 Bar G	0 - 100mV
IPS-G1002-5	0 - 10 Bar G	4 - 20mA
IPS-G1002-6	0 - 10 Bar G	0 - 5V
IPS-G1602-3	0 - 16 Bar G	0 - 100mV
IPS-G1602-5	0 - 16 bar G	4-20mA
IPS-G1602-6	0 - 16 bar G	0-5V
IPS-C0184-5	-1 to +24 Bar G	4 - 20mA
IPS-C0184-6	-1 to +24 Bar G	0 - 5V
IPS-G2502-3	0 - 25 Bar G	0 - 100mV
IPS-G2502-5	0 - 25 Bar G	4 - 20mA
IPS-G2502-6	0 - 25 Bar G	0 - 5V
IPS-G4002-3	0 - 40 Bar G	0 - 100mV
IPS-G4002-5	0 - 40 Bar G	4 - 20mA
IPS-G4002-6	0 - 40 Bar G	0 - 5V
IPS-G1003-3	0 - 100 Bar G	0 - 100mV
IPS-G1003-5	0 - 100 Bar G	4 - 20mA
IPS-G1003-6	0 - 100 Bar G	0 - 5V
IPS-G2503-3	0 - 250 Bar G	0 - 100mV
IPS-G2503-5	0 - 250 Bar G	4 - 20mA
IPS-G2503-6	0 - 250 Bar G	0 - 5V
IPS-G4003-3	0 - 400 Bar G	0 - 100mV
IPS-G4003-5	0 - 400 Bar G	4 - 20mA
IPS-G4003-6	0 - 400 Bar G	0 - 5V

### Mechanical Dimensions

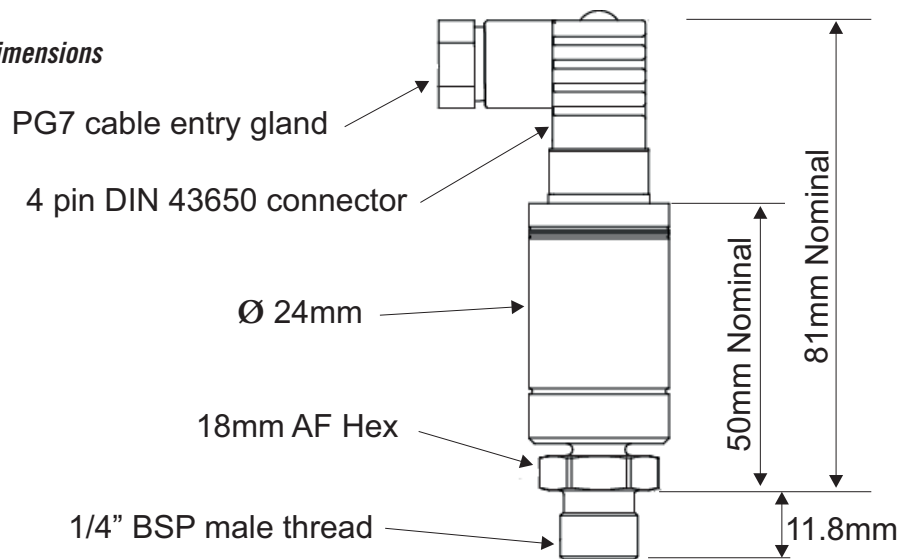

Cynergy3 Components Ltd.  
 7 Cobham Road  
 Ferndown Industrial Estate  
 Wimborne, Dorset BH21 7PE  
 Telephone +44 (0) 1202 897969

Email: sales@cynergy3.com

ISO9001 CERTIFIED

www.cynergy3.com