


## ME040-762xxTCO01

端子台 > 歐規端子台

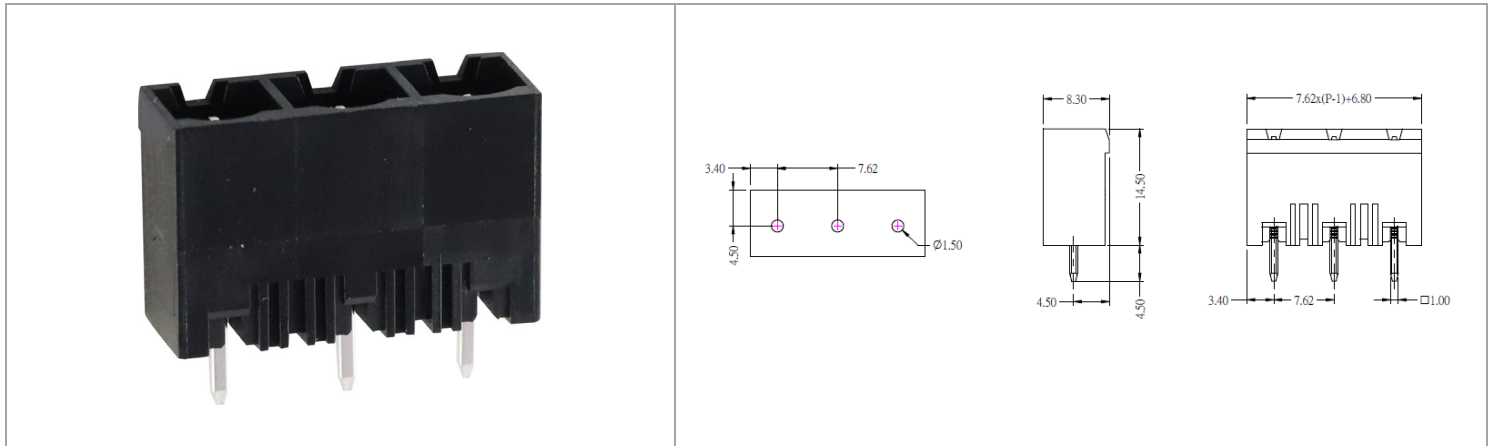

目錄僅供參考，實際規格仍依照產品工程圖面為準

### 產品介紹 Product Description

PCB Terminal Blocks , Push in, Pitch : 7.62 mm / Product data IEC: 630/ 24A / Product data UL: 600V, 20A

### 一般資料 General information

產品類型 Category	PCB Connector, Socket
產品間距 (mm) Pitch (mm)	7.62
產品顏色 Color	Black (default)
焊接方式 Soldering method	Wave soldering
固定方式 Type of locking	Without
產品長度 (mm) Length (mm)	7.62x(P-1)+6.80
產品寬度 (mm) Width (mm)	8.3
產品高度 (mm) Height (mm)	14.5
出腳長度 (mm) Solder pin length (mm)	4.5
出腳尺寸 (mm) Solder pin dimensions (mm)	1.0×1.0
焊孔直徑 (mm) PCB hole diameter (mm)	φ 1.5
位數 Number of positions	2~12
產品層數 Number of levels	1

### 材料資訊 Material information

絕緣材料 Insulating material	PA
絕緣材料組別 Insulating material group	I
耐燃等級，符合UL94 Flammability rating according to UL94	V0
導體材料 Contact material	Copper
導體表面鍍層 Plating of contact surface	tin plated

### 連接數據-IEC Connection data-IEC

額定電流 (A) Rated current (A)	24
額定電壓 (II/2)(V) Rated voltage (II/2)(V)	1000
額定電壓 (III/2)(V) Rated voltage (III/2) (V)	630
額定電壓 (III/3)(V) Rated voltage (III/3)(V)	500
額定沖擊電壓 (II/2)(KV) Rated impulse voltage (II/2)(KV)	6
額定沖擊電壓 (III/2)(KV) Rated impulse voltage (III/2)(KV)	6
額定沖擊電壓 (III/3)(KV) Rated impulse voltage (III/3)(KV)	6

**連接數據-UL Connection data-UL**

額定電壓 (UL/CUL 標準B組)(V) Rated voltage (UL/CUL use group B)(V)	300
額定電流 (UL/CUL 標準B組)(A) Rated current (UL/CUL use group B)(A)	20
額定電壓 (UL/CUL 標準C組)(V) Rated voltage (UL/CUL use group C)(V)	300
額定電流 (UL/CUL 標準C組)(A) Rated current (UL/CUL use group C)(A)	20
額定電壓 (UL/CUL 標準D組)(V) Rated voltage (UL/CUL use group D)(V)	600
額定電流 (UL/CUL 標準D組)(A) Rated current (UL/CUL use group D)(A)	5

**環境與安全 Environment & Safety**

Storage temperature, min. (°C)	-25
Storage temperature, max. (°C)	55
Max. relative humidity during storage	70%
備註：以上三欄位為我司端子未來之標準儲存溫度及濕度	
最高工作溫度 (°C) Operating temperature. max (°C)	105
最低工作溫度 (°C) Operating temperature. min (°C)	-40

**認證 Approvals**