


3.10 Ref.

3.50x(N/2-1)+3.90


3.10 Ref.

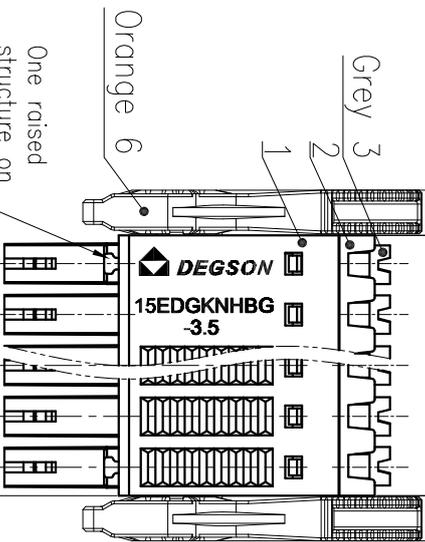


3.50

3.50x(N/2-1)


1.95

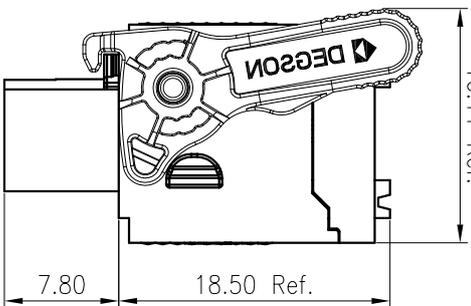

16.11 Ref.

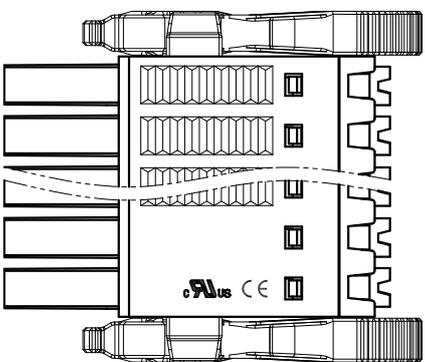

标注公差/General tolerance(mm)			
0	>3	>6	>10
~	~3	~6	~10
3	6	10	18
~	~3	~6	~10
~	~6	~10	~18
~	~10	~18	~30
~	~18	~30	~50
~	~30	~50	~80
~	~50	~80	~120
~	~80	~120	~180
~	~120	~180	~250
~	~180	~250	~315
~	~250	~315	~400
~	~315	~400	~500
~	~400	~500	~>500
~	~>500	~>500	~>500
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±0.93	±1.05	±1.15	±1.60
±2.20	±2.50		
0.1/10			
±2°			

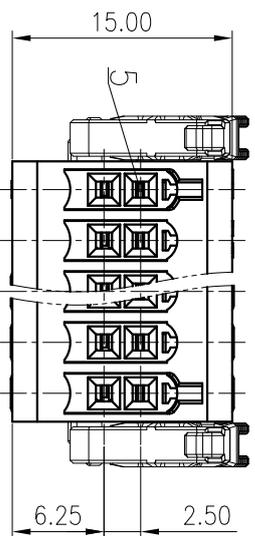

15.00

6.25

2.50

REV	ECN	DESCRIPTION	DRT	DATE	SIZE: A4	SCALE: 2:1	SHEET 1/1

MATERIAL: / SURFACE: /

MAT NO.: /  
 STATUS: /  
 APPD: LI GL 2020.06.04  
 CHKD: Ma EK 2020.06.04  
 DRT: HuangSh 2017.05.27

**DEGSON** 宁波高松电子有限公司  
 NINGBO DEGSON ELECTRICAL CO., LTD

NAME: 15EDGKNHBG-3.5-XXP-1Y-100A(H)  
 DRAWING NO.: 15EDGKNHBG-3.5-C02

TYPE: CUSTOMER DRAWING  
 SCALE: 2:1  
 SHEET 1/1

ITEM	PART NAME	MATERIAL	NOTES
6	Handle	PA66-GF	UL94V-0
5	Clamp	Copper alloy	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66-GF	UL94V-0
2	Cover	PA66-GF	UL94V-0
1	Housing	PA66-GF	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/10	50/10	300/10
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	160/13.4	160/13.4	320/13.4
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
线在范围(导线和致动)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~1.5/28~16		
间距/Pitch(mm)/线数范围/Poles	3.50/N=04~48P		
剥线长度/Stripping length(mm)	10~11		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		