
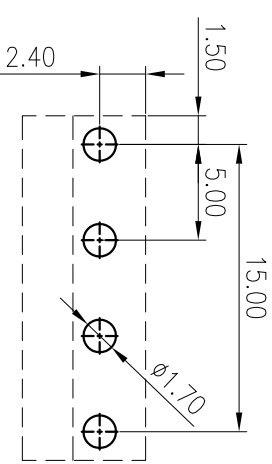
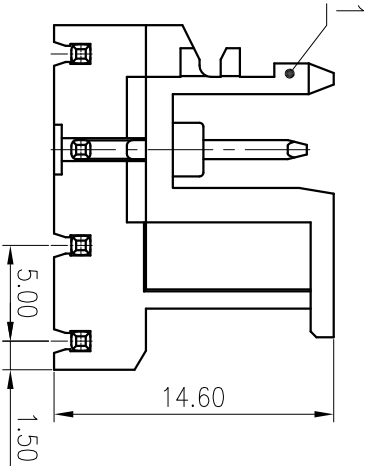

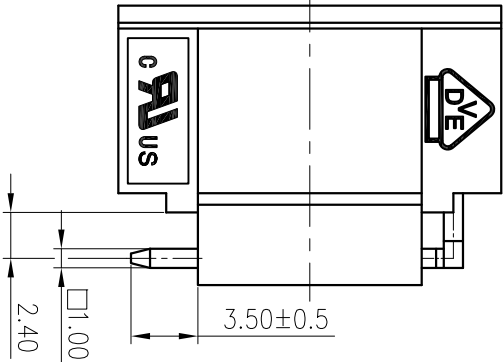


未注公差 (General tolerances)(mm)														D
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
~ 3	~ 6	~ 10	~ 18	~ 30	~ 50	~ 80	~ 120	~ 180	~ 250	~ 315	~ 400	~ 500	0.1/10	
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50														±2
Z														

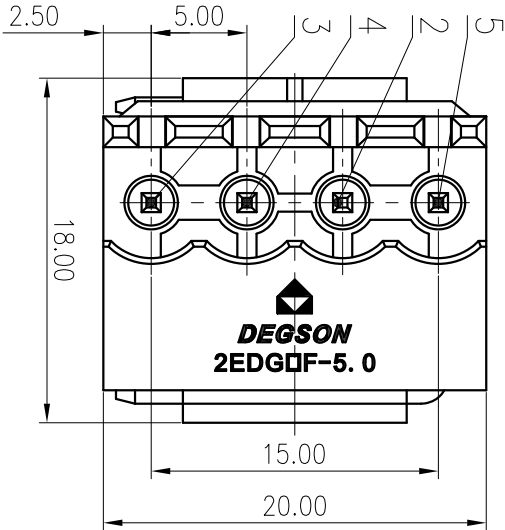

PCB LAYOUT

ITEM	NAME OF PART	MATERIAL	NOTES
5	Pin 4	Copper	Sn Plated
4	Pin 2	Copper	Sn Plated
3	Pin 1	Copper	Sn Plated
2	Pin 3	Copper	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	300/15	/	300/10

EC 标准/IEC Standard:			
过压类别/Overvoltage Category/ 污染等级/Pollution Degree	III/ 3	III/ 2	II/ 2
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: /

SURFACE: /

MAT NO.: /

STATUS: /

APPD: LonCHH 2020.02.29

CHKD: GongYzh 2020.02.29

DRFT: yangys 2007.05.07

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

2EDGLF-5.0-04P-1Y-00A(H)

DRAWING NO.: 10002063

REV

ECN

DESCRIPTION

DRFT

DATE

SIZE: A4

SCALE: 2.5:1

SHEET

1/1