
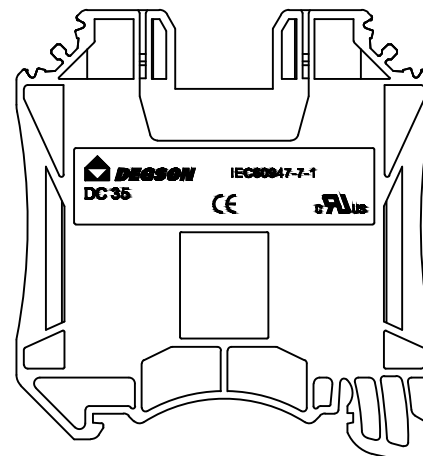
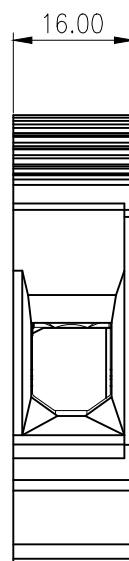
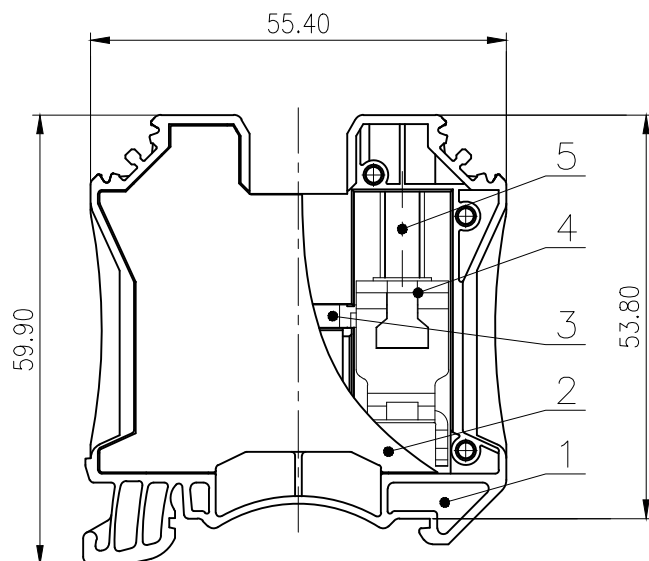


未注公差/General tolerances(mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50	0.1/10 ±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50
-------------	--------------	---------------	----------------	----------------	----------------	----------------	-----------------	------------------	------------------	------------------	------------------	------------------	------	---	---

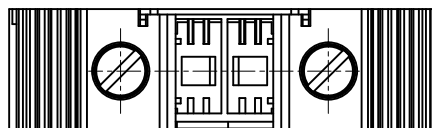

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/150	600/150	600/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/ Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	1000/125	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M6, 3.5/31		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	2.5~50/14~1/0		
间距/Pitch(mm)	16.0		
剥线长度/Stripping length(mm)	14~16		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

5	Screw	Steel	M6\Zn Plated
4	Cage	Steel	Zn Plated
3	Current carrier	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

MATERIAL: /	SURFACE: /
MAT NO.: /	
STATUS: /	
APPD: Li GL 2020.05.25	NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
CHKD: Mao J 2020.05.25	DC35-01P-1Y-00A(H)
DRFT:Wang LX 2020.05.25	DRAWING NO.: DC35-C01
SIZE: A4	TYPE: CUSTOMER DRAWING
SCALE: 1:1	REV T0-2
SHEET 1/1	