D1RFRD006

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		工程变更，去掉挡线板	Zengy	07/21/08"
2		品名中加上塑件底高"1.2"	Zengy	09/09/08"
3		增加VDE线径刻字	Zengy	09/27/08"
4		修改品名中"10A"为"100A"	LJH	11/01/08"
5		增加参数及刻字	LJH	02/12/09"

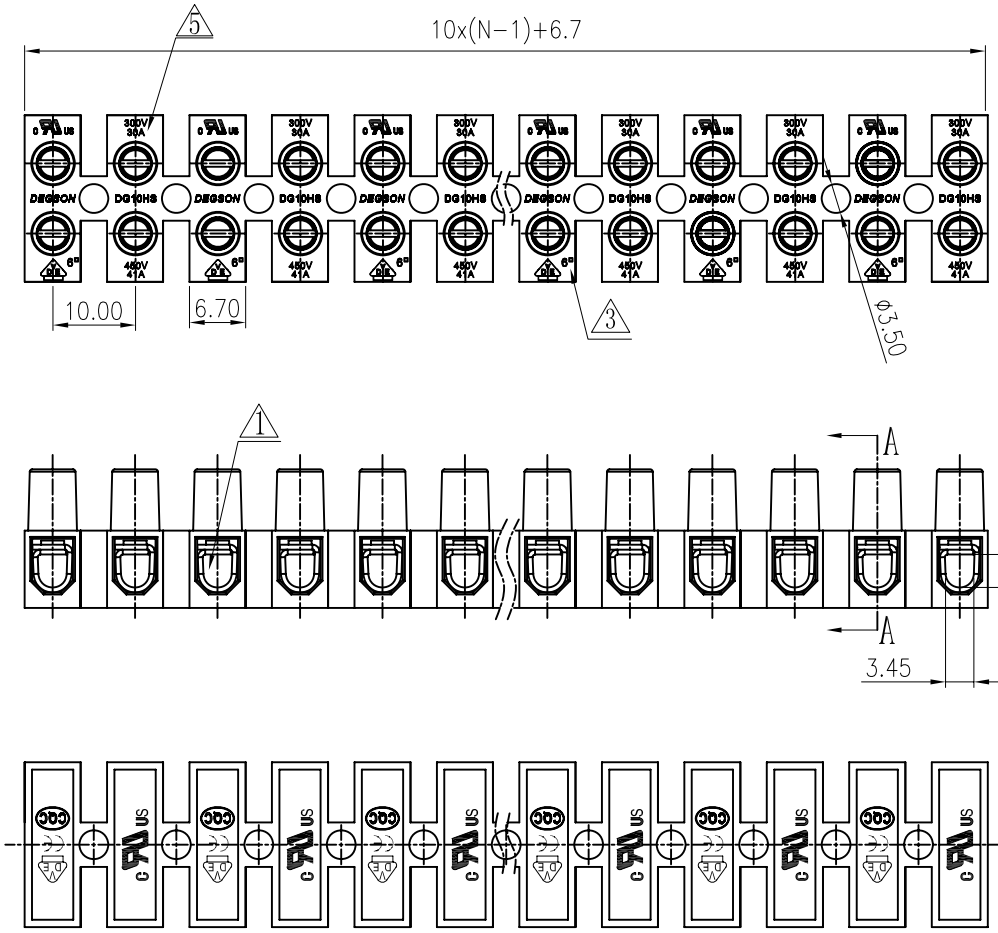



Notes:

1. Pitch:10.0,Poles:2-12P
2. Rated voltage/Current:UL 300V 30A 5
   VDE 450V 41A
3. Operation temperatures:-40℃～+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wier Range:18-10AWG,1-6mm^2
7. Max.Torque Value:M3,5.1kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Naminal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒ ▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
3	DG10HS-Current carrier	X000002130(H)	XX	Steel	$Cr^{3+}Zn$
2	DG10HS"-"Screw	S000003000(H)	XX*2	Steel	$Cr^{3+}Zn$
1	DG10HS-1.2- Housing	2023A0YXXA(H)	1	PA66	UL94V-2

DETACHED LISTS

MM (INCH)

TOLERANCES EXCEPT AS NOTED

MM	
.0 ±	±
.00 ±	±
.000 ±	±

ANGLES ± 1°

THIRD ANGLE PROJECTION

DFTD LIN	DATE 02/22/08"	
CHKD	DATE	
MFD	DATE	
APPVL	DATE	
MATERIAL :		
G.E :		
FINISH:		
SCALE : 1:1		

DEGSON®

宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME 2 4
DG10HS-1.2-XXP-1Y-100A(H)

DRAWING NO. DG10HS-E06 /PART NO.

SIZE A4 REV T5 02/12/09"

DO NOT SCALE DRAWING

SHEET 1 OF 1