

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violators will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 未经许可复制或传播本文件内容，或擅自使用本文件内容，侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev.1.3

2





3

4

5

6

未注公差/General tolerances(mm)															
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500		0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500			
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50		±2'

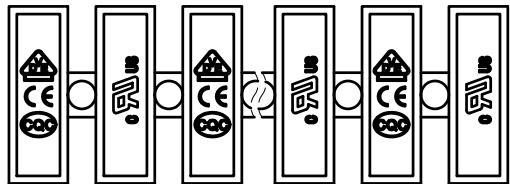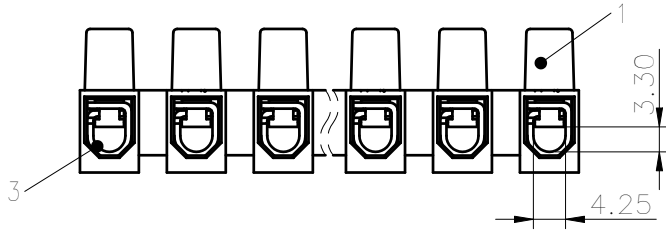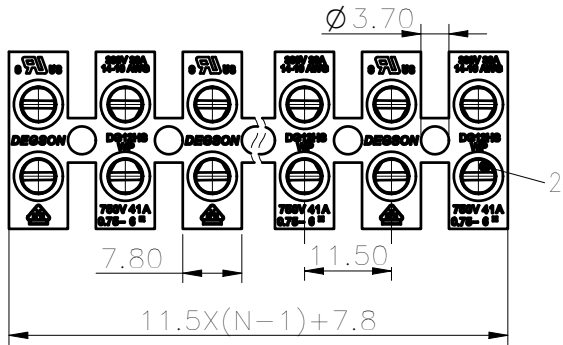

Note:The A&Z(H) in the name means: A(H) and Z(H).

3	Current carrier	Steel+Copper alloy	Zn plated
2	Screws	Steel	Zn Plated/M3.5
1	Housing	PA66	UL94V-2
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/30	/	300/10
IEC 标准/IEC Standard:				
额定电压/电流/Rated Voltage(V)/Current(A)		750/41		
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3.5, 0.8/7.08		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)		14~10/ 0.75~6.0		
间距/Pitch(mm)/线数范围/Poles		11.5/N=2~12P		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

		MATERIAL:		SURFACE:	
APPD: 蓝贵凡		MAT NO./REV:		MAT STATUS: 批量	
CHKD: 曹利彬		NAME			
DRFT: 孙科豪		DG12HWP-1.2-XXP-1Y-100A&Z(H)			
2022.12.05		DRAWING NO.	TYPE	DRAWING STATUS	SCALE
2022.12.05		200015275	CUSTOMER DRAWING	已发布	1:1
A4		SHEET		1/1	

00				
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6