

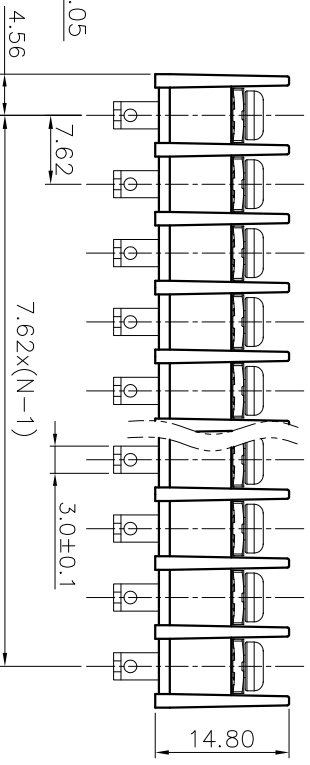





REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

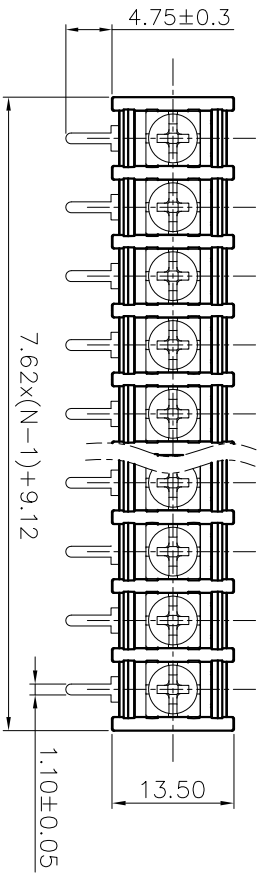

- NOTES1:
- 1. Rated voltage/current : 300V / 15A
 - 2. Torque value : M3 , 4.43N.lm
 - 3. Wire range : 22~14AWG
- NOTES2:
- Dimension shall be interpreted per ASME Y14.5-2009
 - Pitch : 7.62mm, Poles : N=02~26P
 - Withstanding voltage : AC1600V/1Min
 - Operating temperature: -40°C~+105°C
 - Undimensioned tolerances:

Pitch range	in mm	in mm	Over	Over	Over	Over	Over
6	10	30	60	100	150	0.1/0	
TO	TO	TO	TO	TO	TO	<	
10	24	30	60	100	150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2°

6. RoHS Compliance

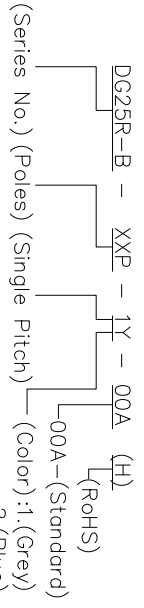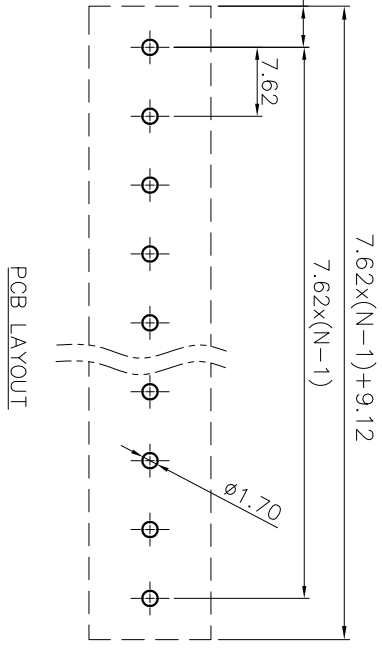

- (Series No.) (Poles) (Single Pitch) (Color) :1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO.,LTD 宁波高松电子有限公司
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	DO NOT SCALE DRAWING	SCALE
THIRD ANGLE PROJECTION		REV	DO
		SHEET	1/1
		SCALE	1:1