
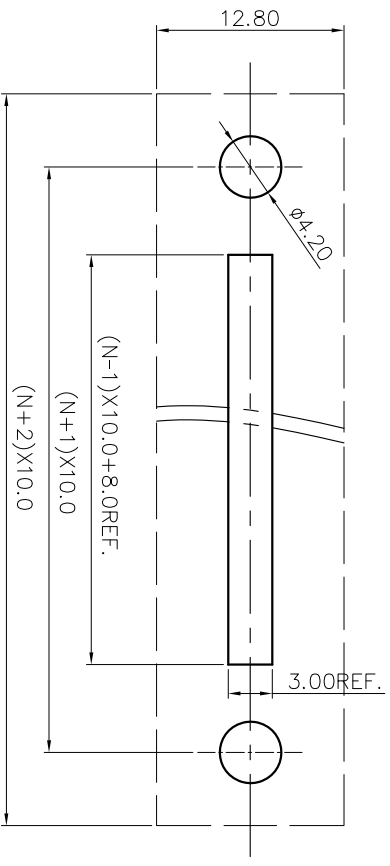

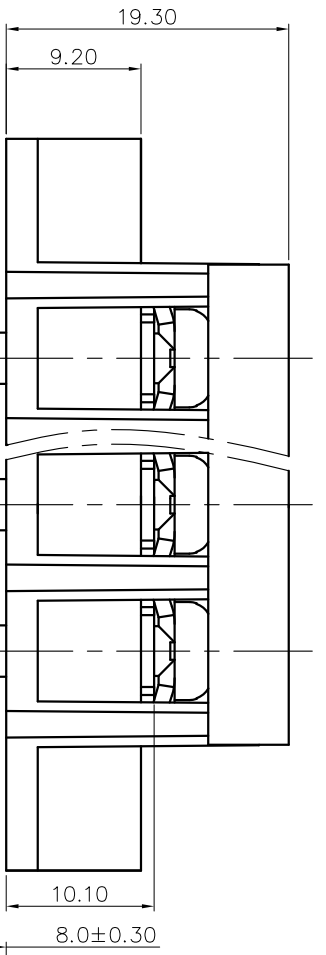



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

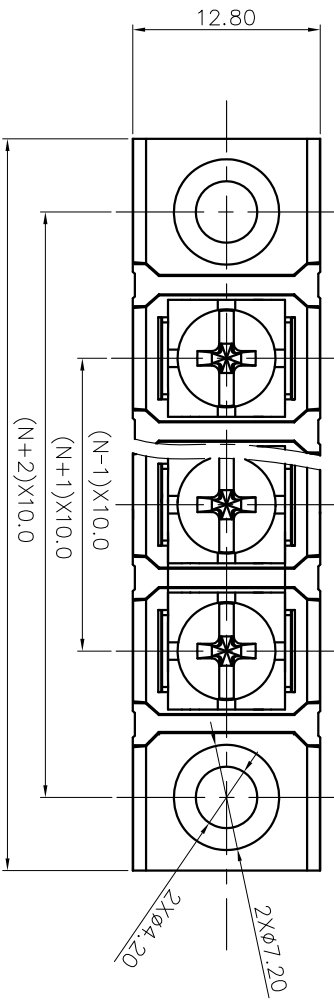

PCB LAYOUT

NOTES1:

- UL Standard
- 1. Rated voltage/current : 300V / 20A
- 2. Torque value : M4 , 10.53lb.in
- 3. Wire range : 22~12AWG

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 10mm, Poles : N=02~20P
- 3. Withstanding voltage : AC1600V/1Min
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range		D
	Over	Over	
6	10	30	0.1/10
TO	TO	TO	<
10	24	60	150
TO	30	100	150
±0.15	±0.20	±0.30	±1.00
±0.30	±0.50	±0.70	±1.30
±2*	±2*	±2*	±2*

6. RoHS Compliance

Series No.) (Poles) (Single Pitch) (Color): 1. (Grey)  
 2. (Blue)  
 3. (Black)  
 4. (Green)  
 5. (Orange)  
 6. (Red)  
 7. (Transparent)  
 8. (Yellow)  
 9. (White)

DG58H-A -- XXP -- 1Y -- 00A (H)  
 (RoHS)  
 00A -- (Standard)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON <sup>®</sup> NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING
		SCALE	1:1