
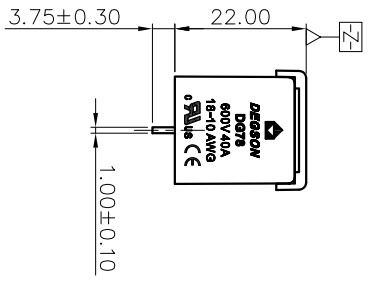
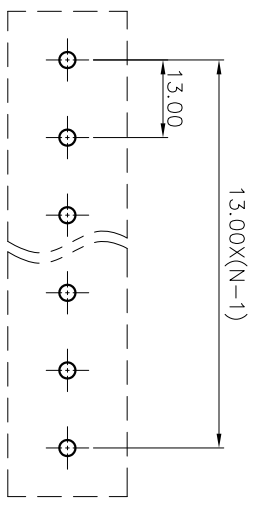
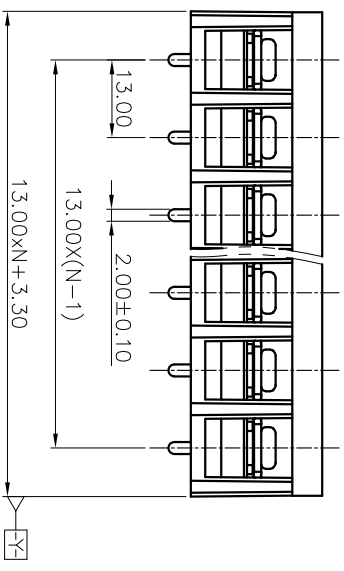



(W/O COVER)

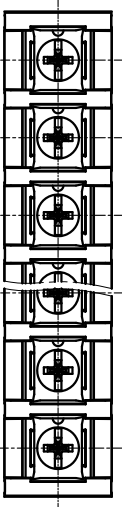


7. RoHS Compliance

mm	Pitch range		Nominal dimension range		mm	in	mm	in	mm	in
	Over	To	Over	To						
6	TO	10	30	60	100	150	0.1	1/10		
TO	10	24	60	100	150	150				
6	TO	10	30	60	100	150				
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30			±2°

- NOTES1:
- UL Standard
 - 1. Rated voltage/current : 600V / 40A
 - 2. Torque value : M4 , 10.53lb.in
 - 3. Wire range : 18~10AWG

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 13.00mm, Poles : N=02~20P
- 3. Stripping length : 8~9mm
- 4. Withstanding voltage : AC2200V/1min
- 5. Operating temperature : -40°C~+105°C
- 6. Undimensioned tolerances:

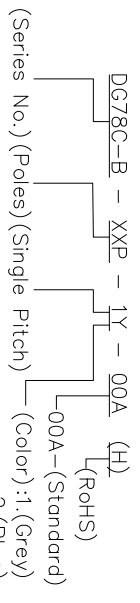

- 1.(Grey)
- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

REVISION RECORD				
REV	EQN	DESCRIPTION	DRFT	DATE

PART NO.:		/	
NAME:		NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	REV	DO
THIRD ANGLE PROJECTION		SCALE	1:1

DETACHED LISTS

APPD:	/
CHKD:	/
DRFT:	/

REV	DO
SHEET	1/1
SCALE	1:1

PCB LAYOUT