

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、发布本文件的内容。侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1753 Rev.1.2


2

3

4

5

6

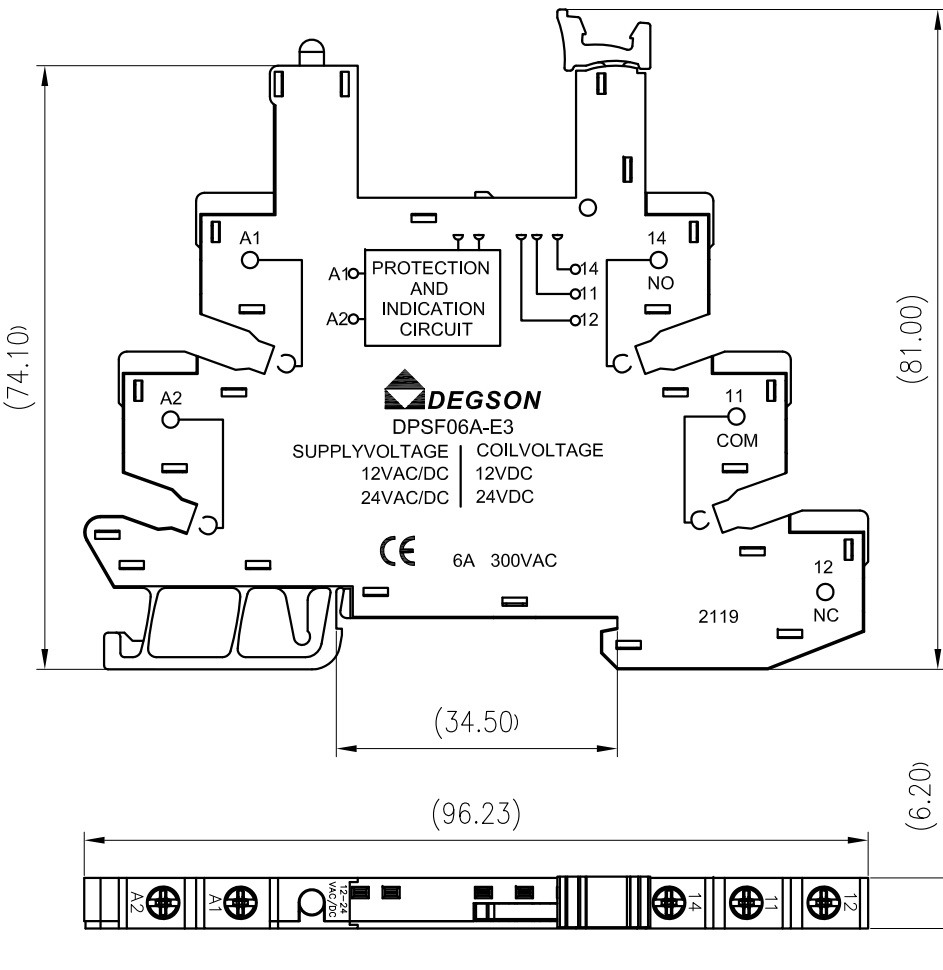

尺寸公差(mm)					0.05/10 ±1°
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	
±0.20	±0.30	±0.50	±0.70	±1.00	

Rated current	10A
Rated voltage	300V
Coil/Contact dielectric voltage	4000V/S
Dielectric voltage between contact	2500V/S
Screw torque	1.0Nm
External connection wire	20-14/0.5-2.5W G/mm ²
Ambient temperature	-40~+85℃
Key controlled symbol	*

Conform to RoHS

Printing for laser marking,printing content is clear ,no broken line,ect

Seal literal reference according to the foot position in the drawing

			1		
1	DPSF06A-E3-00A(H)-N	30029000039	1		
NO.	DESCRIPTION	MATERIAL NO.	QTY	MATERIAL	NOTES
MATERIAL: /		SURFACE: /			
MAT.NO.: 30020000062		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD Description: DPSF06A-E3-00A(H)			
STATUS: /					
APPD:					
CHKD:					
DRFT: /					
DRAWING NO.: 30000370		REV	T0-1		
	SIZE: A4		TYPE: PRODUCT DRAWING	SCALE: 1:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------