





产品规格书

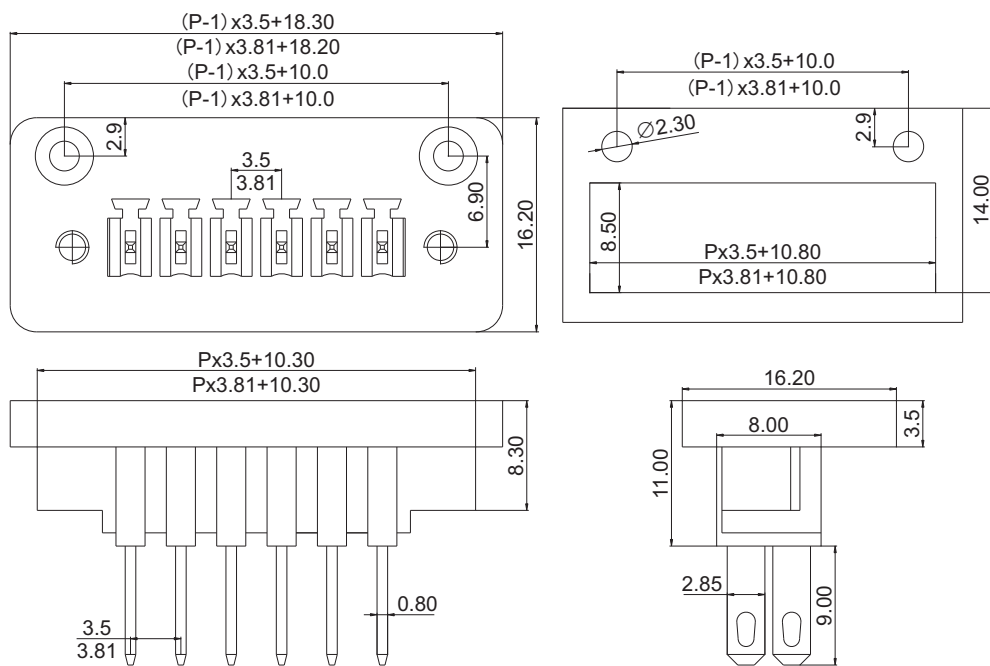


认证	CULUSCE	
电气性能		
参考标准	UL	IEC
额定电压	300V	250V
额定电流	8A	7A
耐电压	AC2000V/1Min	
机械性能		
温度范围	-40℃—+105℃	
尺寸		
间距	3.5/3.81mm	
极数	2P-24P	
材质及电镀		
塑体	PA66 UL94V-0	
焊针	黄铜 镀锡	

订购方式:

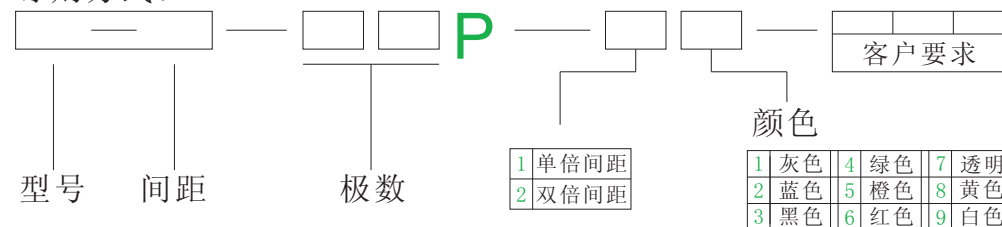

A horizontal scale bar with two black arrowheads pointing outwards. Above the bar is the text "mm" and below the bar is the text "(INCH)".



THIROANGIF PROJECTION



慈溪市科发电子有限公司
CIXI KEFA ELECTRONICS CO., LTD.

NAME KF2EDGWB-3.5/3.81