
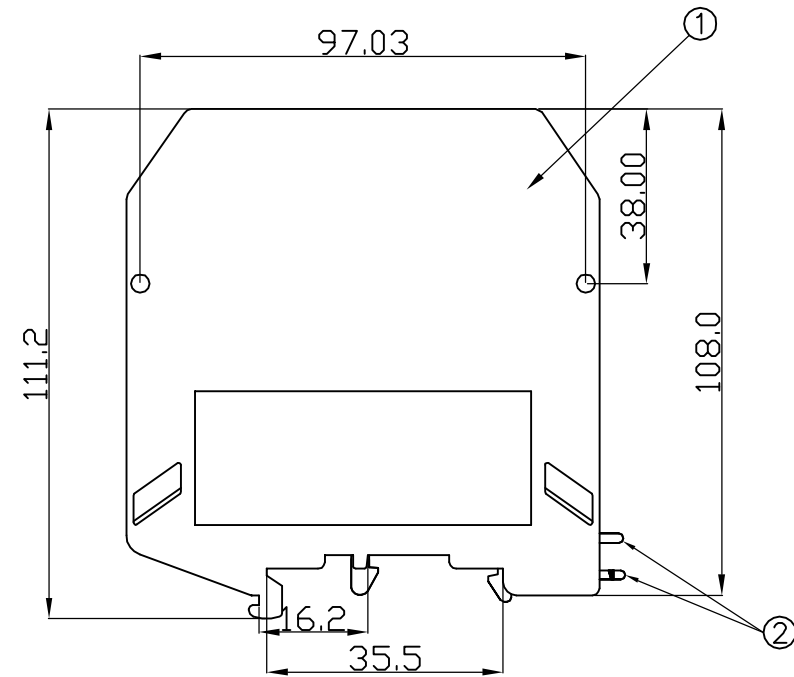
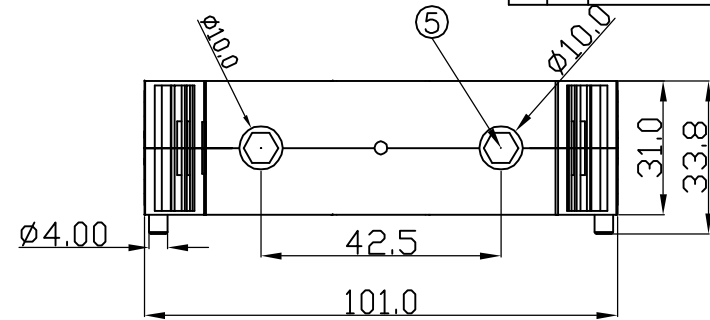
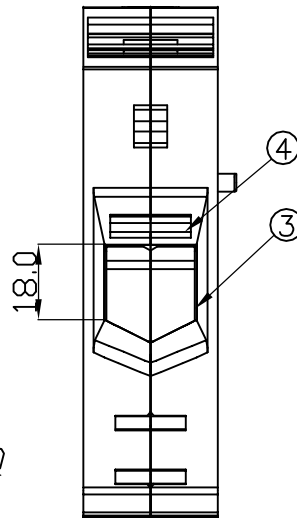


Notes:

1. Rated current:309A
2. Rated voltage:1000V
3. Operation temperatures:-40° C~+105° C
4. Wire Range:50-100mm² 2~300AWG
5. Max. Torque Value:40.80kgf.cm
6. Undimensioned Tolerances:


Pitch range in mm			Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200	over 200 to 480		—
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	0.05/10	□

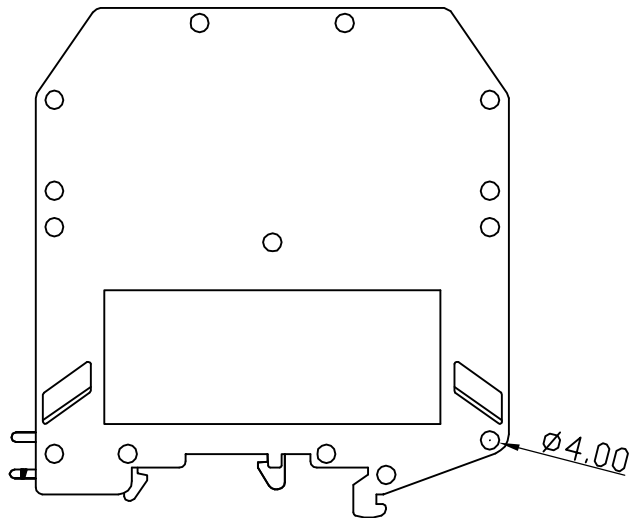

REVISION RECORD

REV	ECO	DESCRIPTION	DRFT	DATE

5	PC 150 M10 Screw	2	Steel	Ni Plated
4	PC 150-Contact	1	Brass	Ni Plated
3	PC 150-Hardware	2	Iron	Ni Plated

2	PC 150-Slip Component		1	PA66	UL94V-0
1	PC 150 Housing		1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)		DFTD ZYH	DATE 11/07/07	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME PC150-01P-1Y-00A DRAWING NO. PC150-E01 SIZE A4 REV 11/07/07 DO NOT SCALE DRAWING SHEET 1 OF 1
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE	
	MM		MFD	DATE	
	.0 ±		APPVL	DATE	
	.00 ±		MATERIAL :		
	.000 ±		ANGLES ± 1°		
			FINISH:		
	THIRD ANGLE PROJECTION		SCALE : 1:1		