




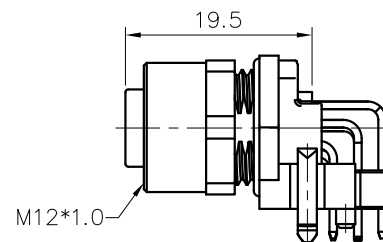

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

SR-M12X-XXP-FF-SF7003-00A(H)

Coding: A,B,D Pin number: 04,05,08

8pin A Coding

Pin Assignments
Front View

Panel Mounted


NOTES:

- Rated voltage/current : 4pin A: 250V / 4A
5pin A: 60V / 4A
8pin A: 30V / 2A
5pin B: 60V / 4A
4pin D: 250V / 4A
- Withstanding voltage : 4pin A: AC1500V/1Min
5pin A: AC1120V/1Min
8pin A: AC500V/1Min
5pin B: AC1120V/1Min
4pin D: AC1500V/1Min


- Levels of protection: IP67
- Wire connection mode: soldering (THR)
- Operating temperature: -40°C ~ +105°C
- For Panel Thickness Max: 4.5mm
- RoHS Compliance
- Tolerance :

.X ±0.25mm
.XX ±0.1mm
L ±1°


4pin A Coding

Pin Assignments
Front View


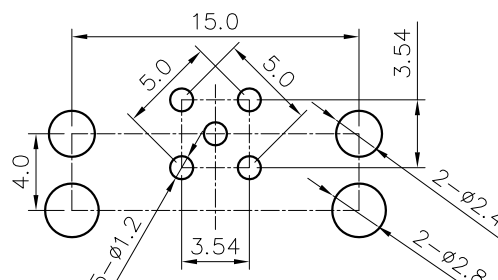
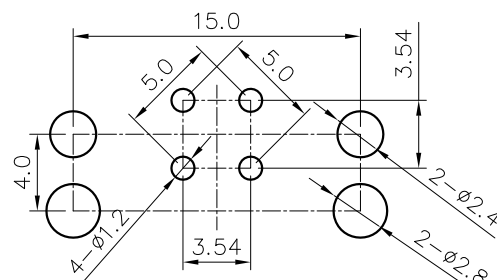
4pin D Coding

Pin Assignments
Front View

5pin A Coding

Pin Assignments
Front View

5pin B Coding

Pin Assignments
Front View

DETACHED LISTS	PART NO.: SRM12XXXPF700300AH	NINGBO DEGSON ELECTRICAL CO., LTD		
	NAME:	SR-M12X-XXP-FF-SF7003-00A(H)		
	APPD:	TITLE: CUSTOMER DRAWING		
	CHKD:	REV D0-2		
THIRD ANGLE PROJECTION	DRFT: SQ 2019.10.15	DRAWING NO.: XXXXXXXX-XX-CXX	SHEET	1/1
		DO NOT SCALE DRAWING	SCALE	1:1