

40x40x28mm

General Specifications

Material:

1. Frame: Plastic (UL94V-0);
2. Impeller: Plastic (UL94V-0);
3. Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black.

Expected Life:

1. 50000 hrs (40°C) Ball Bearing;

Temperature Range:

1. Operating temperature -10°C ~ +70°C (Non condensing);
2. Storage temperature -40°C ~ +70°C (Non condensing).




Specifications


Model	Rated Voltage	Operating Voltage	Rated Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part N	VDC	VDC	A	W	RPM	CFM	m ³ /min	Inch-H ₂ O	Pa	dB-A	g
FZ4028B12H	12	7.0~13.8	0.56	7.80	15000	21.45	0.61	0.98	244.77	58	40
FZ4028B12M	12	7.0~13.8	0.37	5.40	13000	18.30	0.52	0.70	175.34	50	40
FZ4028B12L	12	7.0~13.8	0.22	3.00	10000	13.40	0.38	0.42	105.42	42	40
FZ4028B12D	12	7.0~13.8	0.14	2.04	8000	10.94	0.31	0.29	73.26	39	40
FZ4028B24H	24	14.0~27.6	0.27	8.40	15000	21.45	0.61	0.98	244.77	58	40
FZ4028B24M	24	14.0~27.6	0.18	6.00	13000	18.30	0.52	0.70	175.34	50	40
FZ4028B24L	24	14.0~27.6	0.13	3.36	10000	13.40	0.38	0.42	105.42	42	40
FZ4028B24D	24	14.0~27.6	0.10	2.64	8000	10.94	0.31	0.29	73.26	39	40

Specification are subject to change without notice.


Dimension (Unit: mm)

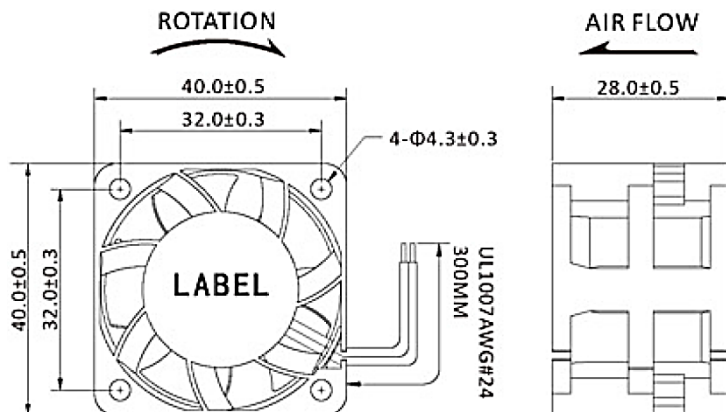

PQ Curve (At Rated Voltage)

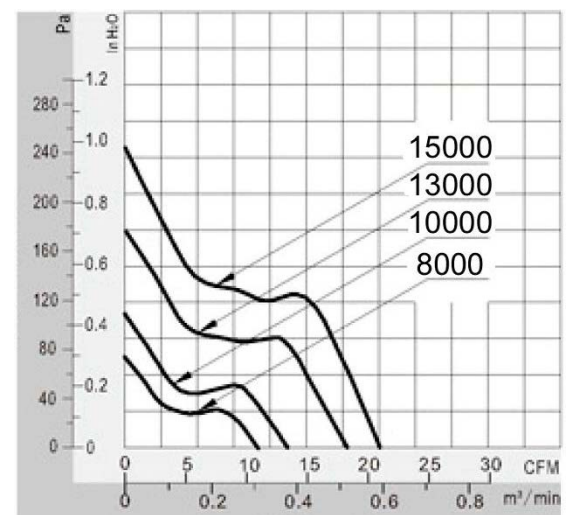

Mounting Panel Cutout (Unit: mm)

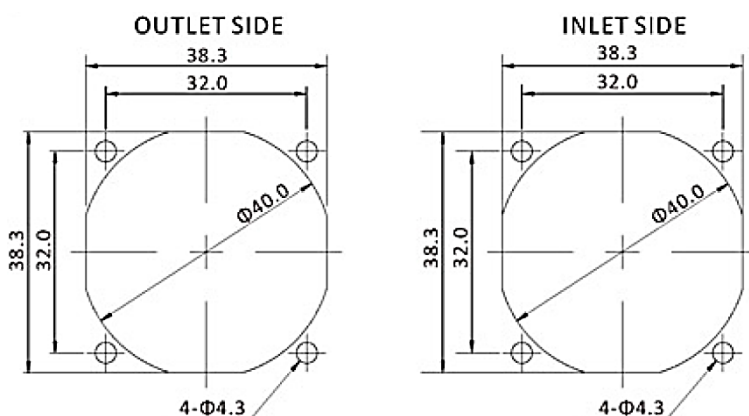

Safety standards

