



温州港源电子有限公司

Wenzhou GangYuan Electronics Co.,Ltd

Total Page	9
Edition	A
Reference No.	

<p>承 认 书 Specifications For Approval</p>

Customer		Part No.:	
Gangyuan Model	G10 系列	Gangyuan Part No.	G10-1-04P-30-1086

Approved by Gangyuan		
Approved by	Checked by	Prepared by
Approved by Customer		
Research & Development by	Quality Assurance by	
<p>Remark:</p> <p>1:This product specification is considered as the technical agreement between the receiving customer and Gangyuan, Any information on the general product catalogue which is in conflict with or differentform from the corresponding information of this document is considered as invalid.</p> <p>2:If customer issue purchase orders without confirmation by signature of this specification after receipt,such confirmation will be considered as granted upon receipt of the first purchase order.</p>		





客 户 签 署 (盖章)
Sing for customer approved

港 源 签 署 (盖章)
Sing for GangYuan approved

确认日期: _____

送承认日期:

6	7	8	9
标记	处数	更改单号	签名

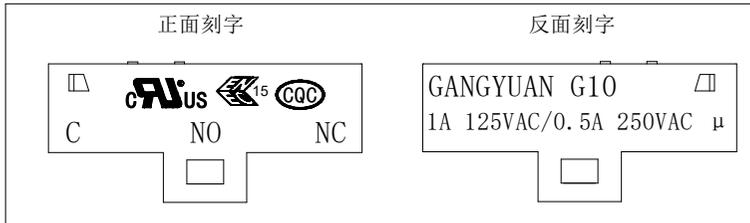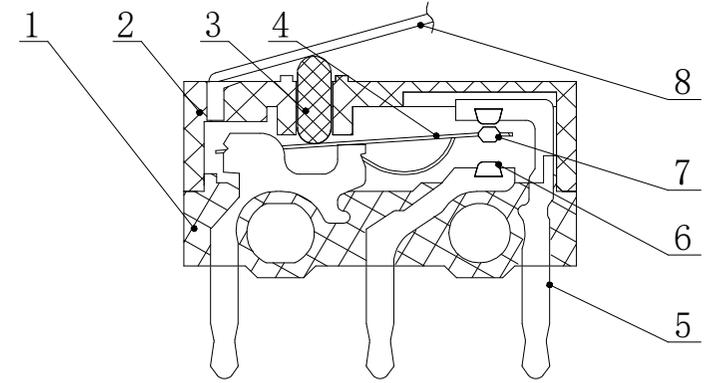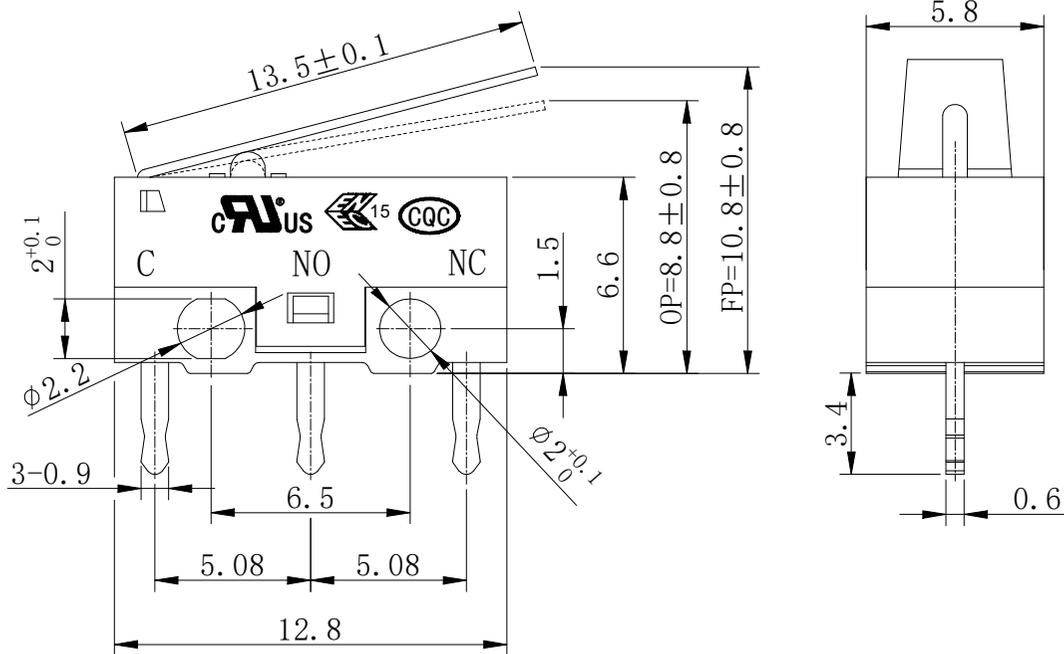

SPECIFICATION (技术要求)


- Operating Temperature Range(环境温度): $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
Operating Relative Humidity(环境湿度): $\leq 85\%$
- Voltage Rating(额定电压): 125V AC
- Current Rating(额定电流): 1A
- Contact Resistance(接触电阻): $\leq 100\text{m}\Omega$
- Insulation Resistance(绝缘电阻): $\geq 100\text{M}\Omega$
- Dielectric Withstanding Voltage(耐电压): 500V AC 1Min
- Soldering Temperature(焊接温度): $260\pm 5^{\circ}\text{C}$ 5s
- Operating Force(操作力): $30\pm 15\text{gf}$
- Life Time(mating cycles)寿命: 10000 Cycles

8	压柄	1	SUS	
7	弹片银点	1	银合金 Silver alloy	
6	端子银点	2	紫铜	镀银 D. Ag
5	连带端子	1	黄铜 Brass	镀银 D. Ag
4	弹片	1	铍青铜 Beryllium bronze	
3	按钮	1	PBT 30%GF	白色 White
2	上盖	1	PBT 30%GF	黑色 Black
1	底座	1	PBT 30%GF	白色 White
NO.	Part Name 零件名称	Qty 数量	Material 材料规格	Plating/Color 镀层及颜色


未注尺寸公差		产品名称	微动开关	图号:	共 1 页 第 1 页
0-10: ± 0.20	26-50: ± 0.40				
11-25: ± 0.30	$\angle: \pm 2^{\circ}$	产品型号	G10-1-04P-30-1086	投影: 	比例
设计					
审核		零部件名称		温州港源电子有限公司 WENZHOU GANGYUAN ELECTRONICS CO., LTD.	1.0
批准		物料编码			

GangYuan Electronics Co.,Ltd		文件编号	GY-002
		发布日期	2022 年 11 月 11 日
PRODUCT SPECIFICATION 产品规格书		文件版次	第 A 版 第 0 次修订
SERIES 系列	MICRO SWITCH 微动开关	页 码	共 9 页 第 4 页
<p>1. General Characteristics 一般特性:</p> <p>1.1 Application: This specification is applied to the micro switch (G10 series) for general applications. 适用范围: 该承认书微动开关 (G10 系列) 的一般使用范围。</p> <p>1.2 Operating Temperature Range: -25°C ~ +85°C 使用温度范围: -25°C ~ +85°C</p> <p>1.3 Operating Relative Humidity: ≤85% 相对湿度: ≤85%</p> <p>Test Conditions: Unless otherwise specified, the atmospheric conditions for making measurements and tests are as follows: 实验条件: 若没有特别说明, 则试验大气条件如下:</p> <p>Ambient Temperature: 5~35°C 环境温度: 5~35°C</p> <p>Relative Humidity: 45~85% 相对湿度: 45~85%</p> <p>Air Pressure: 86~106Kpa (860~106mbar) 大气压力: 86~106Kpa (860~106mbar)</p> <p>1.4 存储方法 Storage method</p> <p>1. 使用前确保包装完整无破损, 无浸湿。 Ensure that the product without package breaking or wetting before use.</p> <p>2. 存储条件 Storage conditions: 储存温度 Storage temperature: -5 ~ 35°C; 储存湿度 Storage humidity: 25% ~80%; 未开封状态: 6 个月内使用完毕 (从发货日开始计算); 超过 6 个月后再使用的, 使用前请先验证: 端脚无氧化、无发黑、塑料件无吸湿起泡, 确保焊接的适宜性; Unopened status: Use up the product as soon as possible before 6 months. (calculated from shipment date).Over 6 months, please make sure below before use it: terminal without oxidation or blackening, plastic parts without moisture absorption or bubble, ensure solderability. 已开封状态: 1 个月内使用完毕; Opened status: use up within 1 month; 储存注意事项: 避开高湿高温和有腐蚀性气体的环境及阳光直射; Storage precautions: Please avoid the following environment: with high humidity, high temperature , corrosive gases and direct sunlight.</p>			
<p>2. Appearance, Structure and Dimensions 外观, 结构及尺寸:</p> <p>2.1 Appearance: The switch shall have good finishing, and no rust, crack or plating defects. 外观: 产品外观良好, 无锈蚀、裂纹和镀层缺陷。</p> <p>2.2 Structure & Dimensions: Refer to individual product drawing. 结构及尺寸: 参见产品图纸</p> <p>2.3 Markings: Refer to individual product drawing. 标识: 参见产品图纸。</p>			
3. Ratings 额定负荷		1A 125V AC	0.5A 250V AC

GangYuan Electronics Co.,Ltd		文件编号	GY-002
		发布日期	2022年11月11日
PRODUCT SPECIFICATION 产品规格书		文件版次	第A版 第0次修订
SERIES 系列	MICRO SWITCH 微动开关	页 码	共9页 第5页
4. Electrical Characteristics 电气特性			
No.	Item 项目	Criteria 标准	Test Method 实验方法
4.1	Contact Resistance 接触电阻	100m Ω Max.	equipment with error not more than 5% can be used. Resistance after test is the average of 5 successive measurements. 可用误差不超过 5%的仪表进行测量, 实验后的电阻取 5 次测量的平均值。
4.2	Insulation Resistance 绝缘电阻	100M Ω Min.	500VDC voltage is applied between each pair of terminals and between the terminal and the metal frame for 60 \pm 5S. 在相互绝缘的所有端子之间及各接线端子与外露的非载流金属零件之间加载 500V 直流电, 持续时间 60 \pm 5S。
4.3	Dielectric withstand in voltage 耐压强度	No dielectric breakdown shall occur. 无击穿现象发生。	500VAC (50~60Hz, cut -off current 10mA) is applied between non-connected terminals and between terminals and the metal frame for 60 \pm 5s. 在互相绝缘的所有端子之间加载 500V (50-60Hz 电流为 10mA) 交流电, 各接线端子与外壳或非载流金属零件之间加载 500V (50-60Hz) 交流电, 持续时间 60 \pm 5S。
5. Mechanical Characteristics 机械特性			
No.	Item 项目	Criteria 标准	Test Method 实验方法
5.1	Operating Force 操作力	30 \pm 15gf	Apply a tension meter on the midpoint of the actuator (or tip of the shaft) to supply a pressure vertically from its free position to operating position. 在操作元件末端沿操作方向均匀施加静载荷, 使操作元件转换到动作位置。
5.2	Return Force 回弹力	8gf Min	The value to which the force in the actuator midpoint (or tip of the shaft) must be reduced to allow the contact to the normal position. 在操作元件末端沿操作方向均匀减少静载荷, 使操作元件从动作位置转换到自由位置。
5.3	Operation Position 操作位置	OP=8.8 \pm 0.8mm	Position of switch plunge or actuator at which point contacts snap from normal to operated position. Note that the case of flexible of adjustable actuators. 开关操动件受到外力后, 由自由状态切换到动作状态的动作位置。(注意防止盖片变形或按钮倾斜现象。)
5.4	Pre Travels 行程	PT=3.6mm Max	The distance vertically through, which the midpoint of the actuator (or tip of the shaft) trip move from its free position to operating position. 从自由位置到动作位置的距离。

GangYuan Electronics Co.,Ltd		文件编号	
		GY-002	
PRODUCT SPECIFICATION 产品规格书		发布日期	
		2022 年 11 月 11 日	
SERIES 系列		文件版次	
		第 A 版 第 0 次修订	
MICRO SWITCH 微动开关		页 码	共 9 页 第 6 页
5.5	Terminal Strength 接线端强度	<p>Shall be free from terminal looseness, damage and insulator breakage. No functional defective occur.</p> <p>端子无松动、损坏及绝缘层的破裂。无功能性不良。</p>	<p>A static load of 25N shall be applied to the tip of terminal in a desired direction for $10 \pm 1s$. The test shall be done once per terminal.</p> <p>以 25N 作用力沿轴向逐渐施加于接线端末端 10 ± 1 秒，作用力方向为离开开关向外指向。每个接线端子测量一次。</p>
5.6	Vibration Proof 振动	<p>After test, Contact resistance: 1Ω Max. Insulation resistance: $100M\Omega$ Min. No functional defective occur. No abnormalities shall be recognized in appearance and construction.</p> <p>实验后， 接触电阻： 1Ω Max。 绝缘电阻： $100M\Omega$ Min。 无功能性不良。 表面及结构无明显变形。</p>	<p>Switch shall be secured to a testing machine by a normal mounting device and method. Switch shall be measured after following test.</p> <p>(1) Vibration frequency range = $10\sim 55$ Hz (2) Total amplitude = $1.5mm$ (3) Sweep ratio: $10\sim 55\sim 10Hz$ Approx. 1 min (4) Method of changing the sweep vibration frequency: logarithmic or linear (5) Direction of vibration: Three perpendicular directions including actuating direction. (6) Duration: 2 hours (6 hours in total)</p> <p>开关采用常规的安装方法牢固地安装在试验设备上，并在下述参数条件下进行试验： (1) 振频=$10-55Hz$ (2) 振幅 $1.5mm$ (3) 振动变化速率： $10-55-10Hz$ 大约 1 分钟 (4) 变频方法：对数或线性型式 (5) 振动方向：三个相互垂直的方向，其中一个方向应是促动元件运动的方向。 (6) 时间：每个方向 2 小时（共 6 小时）。</p>
5.7	Mechanical Shock 冲击	<p>After test, Contact resistance: 1Ω Max. Insulation resistance: $100M\Omega$ Min. No functional defective occur. No abnormalities shall be recognized in appearance and construction.</p> <p>实验后， 接触电阻： 1Ω Max。 绝缘电阻： $100M\Omega$ Min。 无功能性不良。 表面及结构无明显变形。</p>	<p>Switch shall be measured after following test:</p> <p>(1) Mounting Method: Normal (2) Acceleration: $490m/s^2$ (50G) (3) Duration: 11ms (4) Test Direction: 6 directions</p>  <p>(5) Number of shocks: 3 times per direction (18 times in total)</p> <p>试件在下述参数条件下进行试验： (1) 安装方法：常规方法 (2) 加速度： $490m/s^2$ (50G) (3) 时间： 11ms (4) 实验方向：图示 6 方向 (5) 冲击次数：每个方向 3 次（总共 18 次）</p>

GangYuanElectronics Co.,Ltd		文件编号	GY-002
		发布日期	2022年11月11日
PRODUCT SPECIFICATION 产品规格书		文件版次	第A版 第0次修订
SERIES 系列	MICRO SWITCH 微动开关	页 码	共9页 第7页
5.8	Solder Heat Resistance 耐焊接热	No abnormalities shall be observed in appearance and operation. No functional defective occur. 无外观及功能损坏。 无功能性不良。	Switch shall be measured after following test: (1) Solder: H63A (JIS Z3282) (2) Flux: Rosin Flux having a nominal composition of 25% solids by mass of water white rosin in methyl alcohol (JIS K 1501) solution. (3) Soldering Temperature & Immersing Time Dip Soldering 260±5° C 5±1s Manual Soldering 350±5° C 2~3s (4)Immersion Depth: (For Dip Soldering) Immersion depth shall be at copper plating portion of PCB after mounting. (Thickness of PCB=1.6mm) 试件在下述参数条件下进行试验: (1) 焊料: H63A (JIS Z 3282) (2) 焊剂: 焊剂, 质量百分比为 25%松香, 75% 甲醇的无色透明溶液。 (3) 焊接温度及浸渍时间: 自动焊接 260± 5°C 5±1s 手工焊接 350±5°C 2~3s (4) 浸渍深度: (对于手动焊接) 接线端应浸到离开开关根部 1.6mm 处。
6. Durability characteristics 耐久性能			
No.	Item 项目	Criteria 标准	Test Method 实验方法
6.1	Mechanical Life 机械寿命	After test, Dielectric withstand in voltage:750VAC Insulation resistance:50MΩ Min. No functional defective occur The switch shall be free from abnormalities in appearance construction.	100,000 cycles of operation shall be performed continuously at a rate of 60 cycles per minute without load. 在不带负荷的条件下, 速度为 60 次/分, 在寿命试验设备上连续转换 100,000 次。
6.2	Electrical Life 电气寿命	实验后: 耐压强度: 750VAC 绝缘电阻: 50MΩ Min. 无功能性不良。 开关外观及结构应无损坏。	operation shall be performed continuously at a rate of 6-12 cycles per minute with load as follow. 1A 125V AC 10,000cycles 在带以下负荷的条件下, 速度为 6-12 次/分, 在寿命试验设备上连续转换。 1A 125V AC 10,000cycles

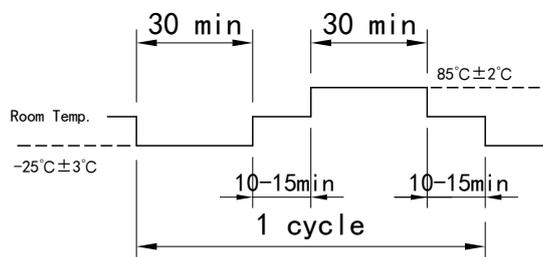GangYuan Electronics Co.,Ltd		文件编号	GY-002
		发布日期	2022 年 11 月 11 日
PRODUCT SPECIFICATION 产品规格书		文件版次	第 A 版 第 0 次修订
SERIES 系列	MICRO SWITCH 微动开关	页 码	共 9 页 第 8 页
7. Weather Proof Characteristics 耐候性能:			
No.	Item 项目	Criteria 标准	Test Method 实验方法
7.1	Cold Proof 低温	After test, Contact resistance:1Ω Max. Insulation resistance:100MΩ Min. No functional defective occur.	After testing at $-25 \pm 2^{\circ} \text{C}$ for 48 hours, the switch shall be allowed to stand under normal temperature and humidity conditions for 1 hour, and measurement shall be made within 1 hour after that. Water drops shall be eliminated. 试件在 $-25 \pm 2^{\circ}\text{C}$ 的温控箱内保持 48 小时, 然后在正常温度和湿度下恢复 1 小时, 并在此后 1 小时内对试品进行测量, 水滴应消失。
7.2	Hot Proof 高温	The switch shall be free from abnormalities in appearance & construction. 实验后, 接触电阻: 1Ω Max。 绝缘电阻: 100MΩ Min。 无功能性不良。 开关外观及结构应无损坏。	After testing at $85 \pm 2^{\circ} \text{C}$ for 48 hours, the switch shall be allowed to stand under normal temperature and humidity conditions for 1 hour, and measurement shall be made within 1 hour after that. 试件在 $85 \pm 2^{\circ}\text{C}$ 的温控箱内保持 48 小时, 然后在正常温度和湿度下恢复 1 小时, 并在此后 1 小时内对试品进行测量。
7.3	Moisture Resistance 恒定湿热	After test, Contact resistance: 1Ω Max. Insulation resistance:100MΩ Min. No functional defective occur. The switch shall be free from abnormalities in appearance & construction.	After testing at $40 \pm 2^{\circ} \text{C}$,90~95% RH for 96 hours, the switch shall be allowed to stand under normal temperature and humidity conditions for 1 hour, and measurement shall be made within 1 hour after that. Water drops shall be eliminated. 试件在 $40 \pm 2^{\circ}\text{C}$, 90-95%RH 的温控箱内保持 96 小时, 然后在正常温度和湿度下恢复 1 小时, 并在此后 1 小时内对试品进行测量, 水滴应消失。
7.4	Temperature Cycling 温度转换	After test, Contact resistance: 1Ω Max. Insulation resistance:100MΩ Min. No functional defective occur. The switch shall be free from abnormalities in appearance & construction. 实验后, 接触电阻: 1Ω Max。 绝缘电阻: 100MΩ Min。 无功能性不良。 开关外观及结构应无损坏。	After 5 cycles of following conditions, the switch shall be allowed to stand under normal temperature and humidity conditions for 1 hour, and measurement shall be made within 1 hour after that. Water drops shall be eliminated. 试件按下述实验条件试验 5 次, 然后在正常温度和湿度下恢复 1 小时, 并在此后 1 小时内对试品进行测量, 水滴应消失。 

.5

Salt Mist
盐雾实验

No remarkable corrosion shall be recognized in metal part.
在金属件上没有腐蚀斑点。

The switch shall be checked after following test:

- (1) Temperature: $35 \pm 2^\circ \text{C}$
- (2) Salt Solution: $5 \pm 1\%$ (Solids by mass)
- (3) Duration: 24 ± 1 hour


After test, salt deposit shall be removed by running water.

试件在下述实验后测量:

- (1) 温度: $35 \pm 2^\circ \text{C}$
- (2) 盐溶液浓度: $5 \pm 1\%$ (质量百分比)
- (3) 时间: 24 ± 1 小时

实验后的盐沉积物用水冲掉。

8. Operating data diagram 操作参数示意图

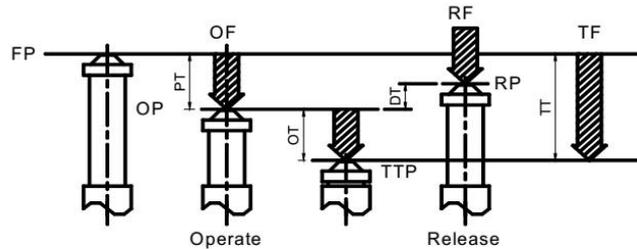

- OF: Operating Force 操作力
- RF: Release Force 回复力
- TF: Total travel Force 全行程力
- FP: Free Position 自由位置
- OP: Operating Position 动作位置
- TTP: Total Travel Position 全行程位置
- RP: Release Position 释放位置
- PT: Pre Travel 行程
- OT: Over travel 超行程
- DT: Differential Travel 差动行程
- TT: Total Travel 全行程