


ISSUE	DESCRIPTION	DATE
1	OFFICIAL RELEASED	

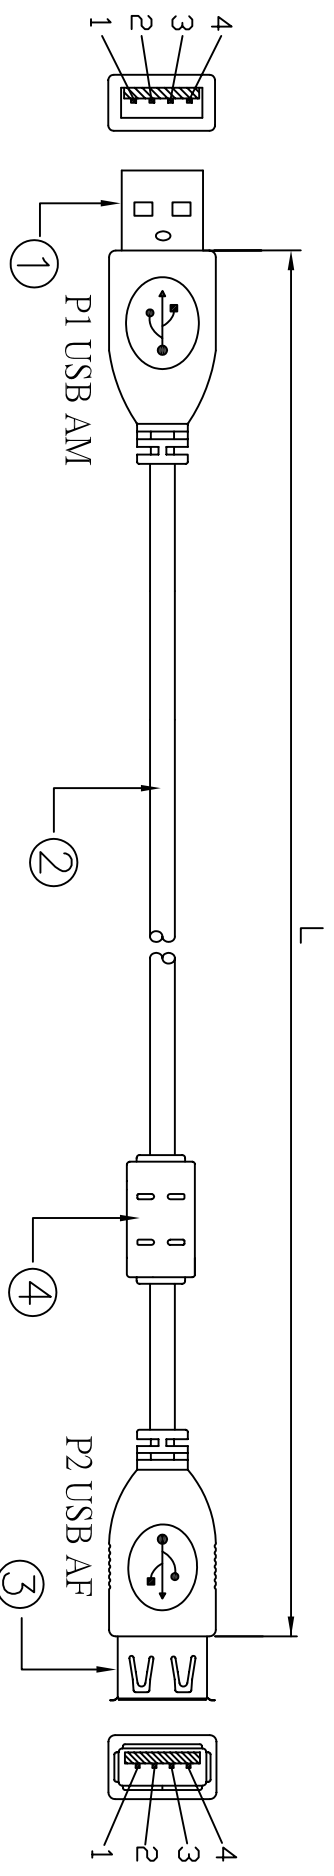

Connection		
P1	Wire	P2
1	Red	1
2	White	2
3	Green	3
4	Black	4
Shell	Braid	Shell

"L" mm	Tolerance (mm)	P/N
1800	±30	CCF-USB2-AMAF-6
3000	±30	CCF-USB2-AMAF-10
4500	±50	CCF-USB2-AMAF-15

Cable Spec:
 1. Conductor: 28AWG Cu*2C+24AWG Cu*2C+AL+B
 2. Coat: PVC Black.
 3. OD: 4.5±0.2mm
 Package: Polybag with Gembird logo

ITEM	DESCRIPTION	QTY	UNIT	ITEM	DESCRIPTION	QTY	UNIT
③	USB AF socket	1	SET				
②	USB2.0 Cable, black						
①	USB AM plug	1	SET	④	Ferrite core	1	SET

Gembird Electronics Ltd.

Draw	Long	TITLE:	DWG NO:
Date	2010.10.11	USB2.0 AM/BM Cable	
Check		P/N:	CUSTOMER:
Date		CCF-USB2-AMBM-xx	

UNIT: **MM** SCAL: **NONE**

TOLERANCE:	ANGLE	EDITION:	CUSTOMER
WHOLE NO ±0.5	±0.5°	1	

SH 1 DF 1 A4