



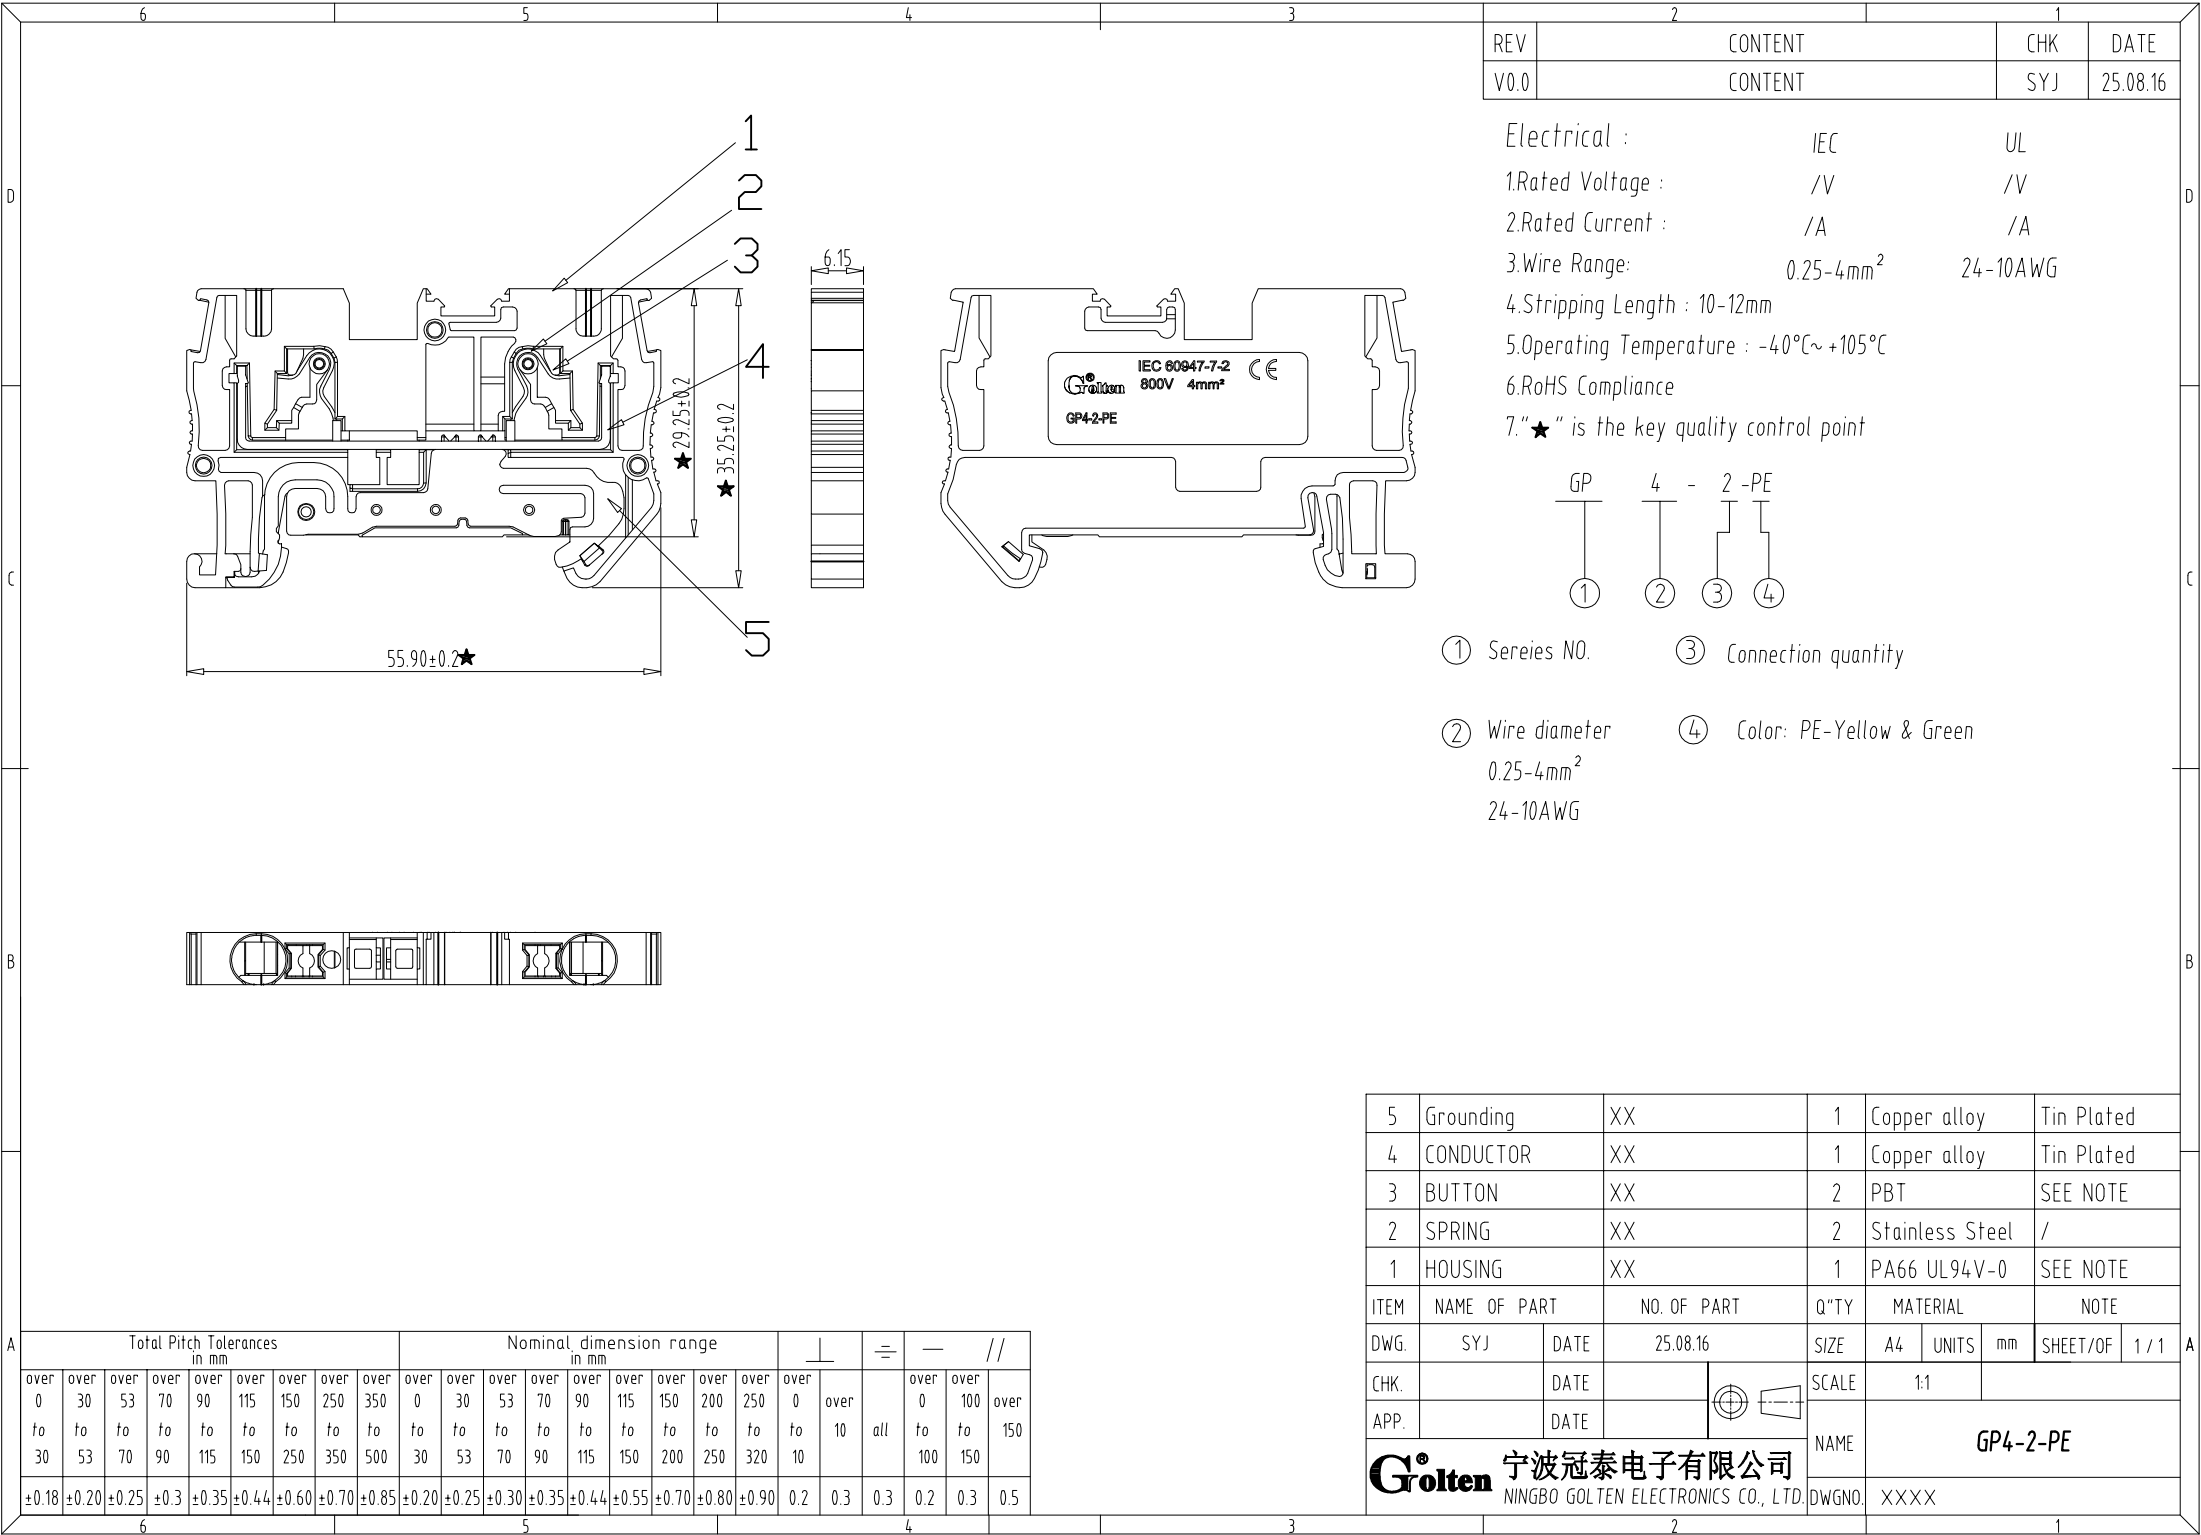

REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	25.08.16

Electrical : IEC UL
1.Rated Voltage : /V /V
2.Rated Current : /A /A
3.Wire Range: 0.25-4mm² 24-10AWG
4.Stripping Length : 10-12mm
5.Operating Temperature : -40℃~+105℃
6.RoHS Compliance
7."★" is the key quality control point



- ① Sereies NO. ③ Connection quantity
② Wire diameter ④ Color: PE-Yellow & Green
0.25-4mm²
24-10AWG

5	Grounding	XX	1	Copper alloy	Tin Plated
4	CONDUCTOR	XX	1	Copper alloy	Tin Plated
3	BUTTON	XX	2	PBT	SEE NOTE
2	SPRING	XX	2	Stainless Steel	/
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	SYJ	DATE	25.08.16	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	GP4-2-PE
Grolten 宁波冠泰电子有限公司				DWGNO.	XXXX
NINGBO GOLTEN ELECTRONICS CO., LTD.					