


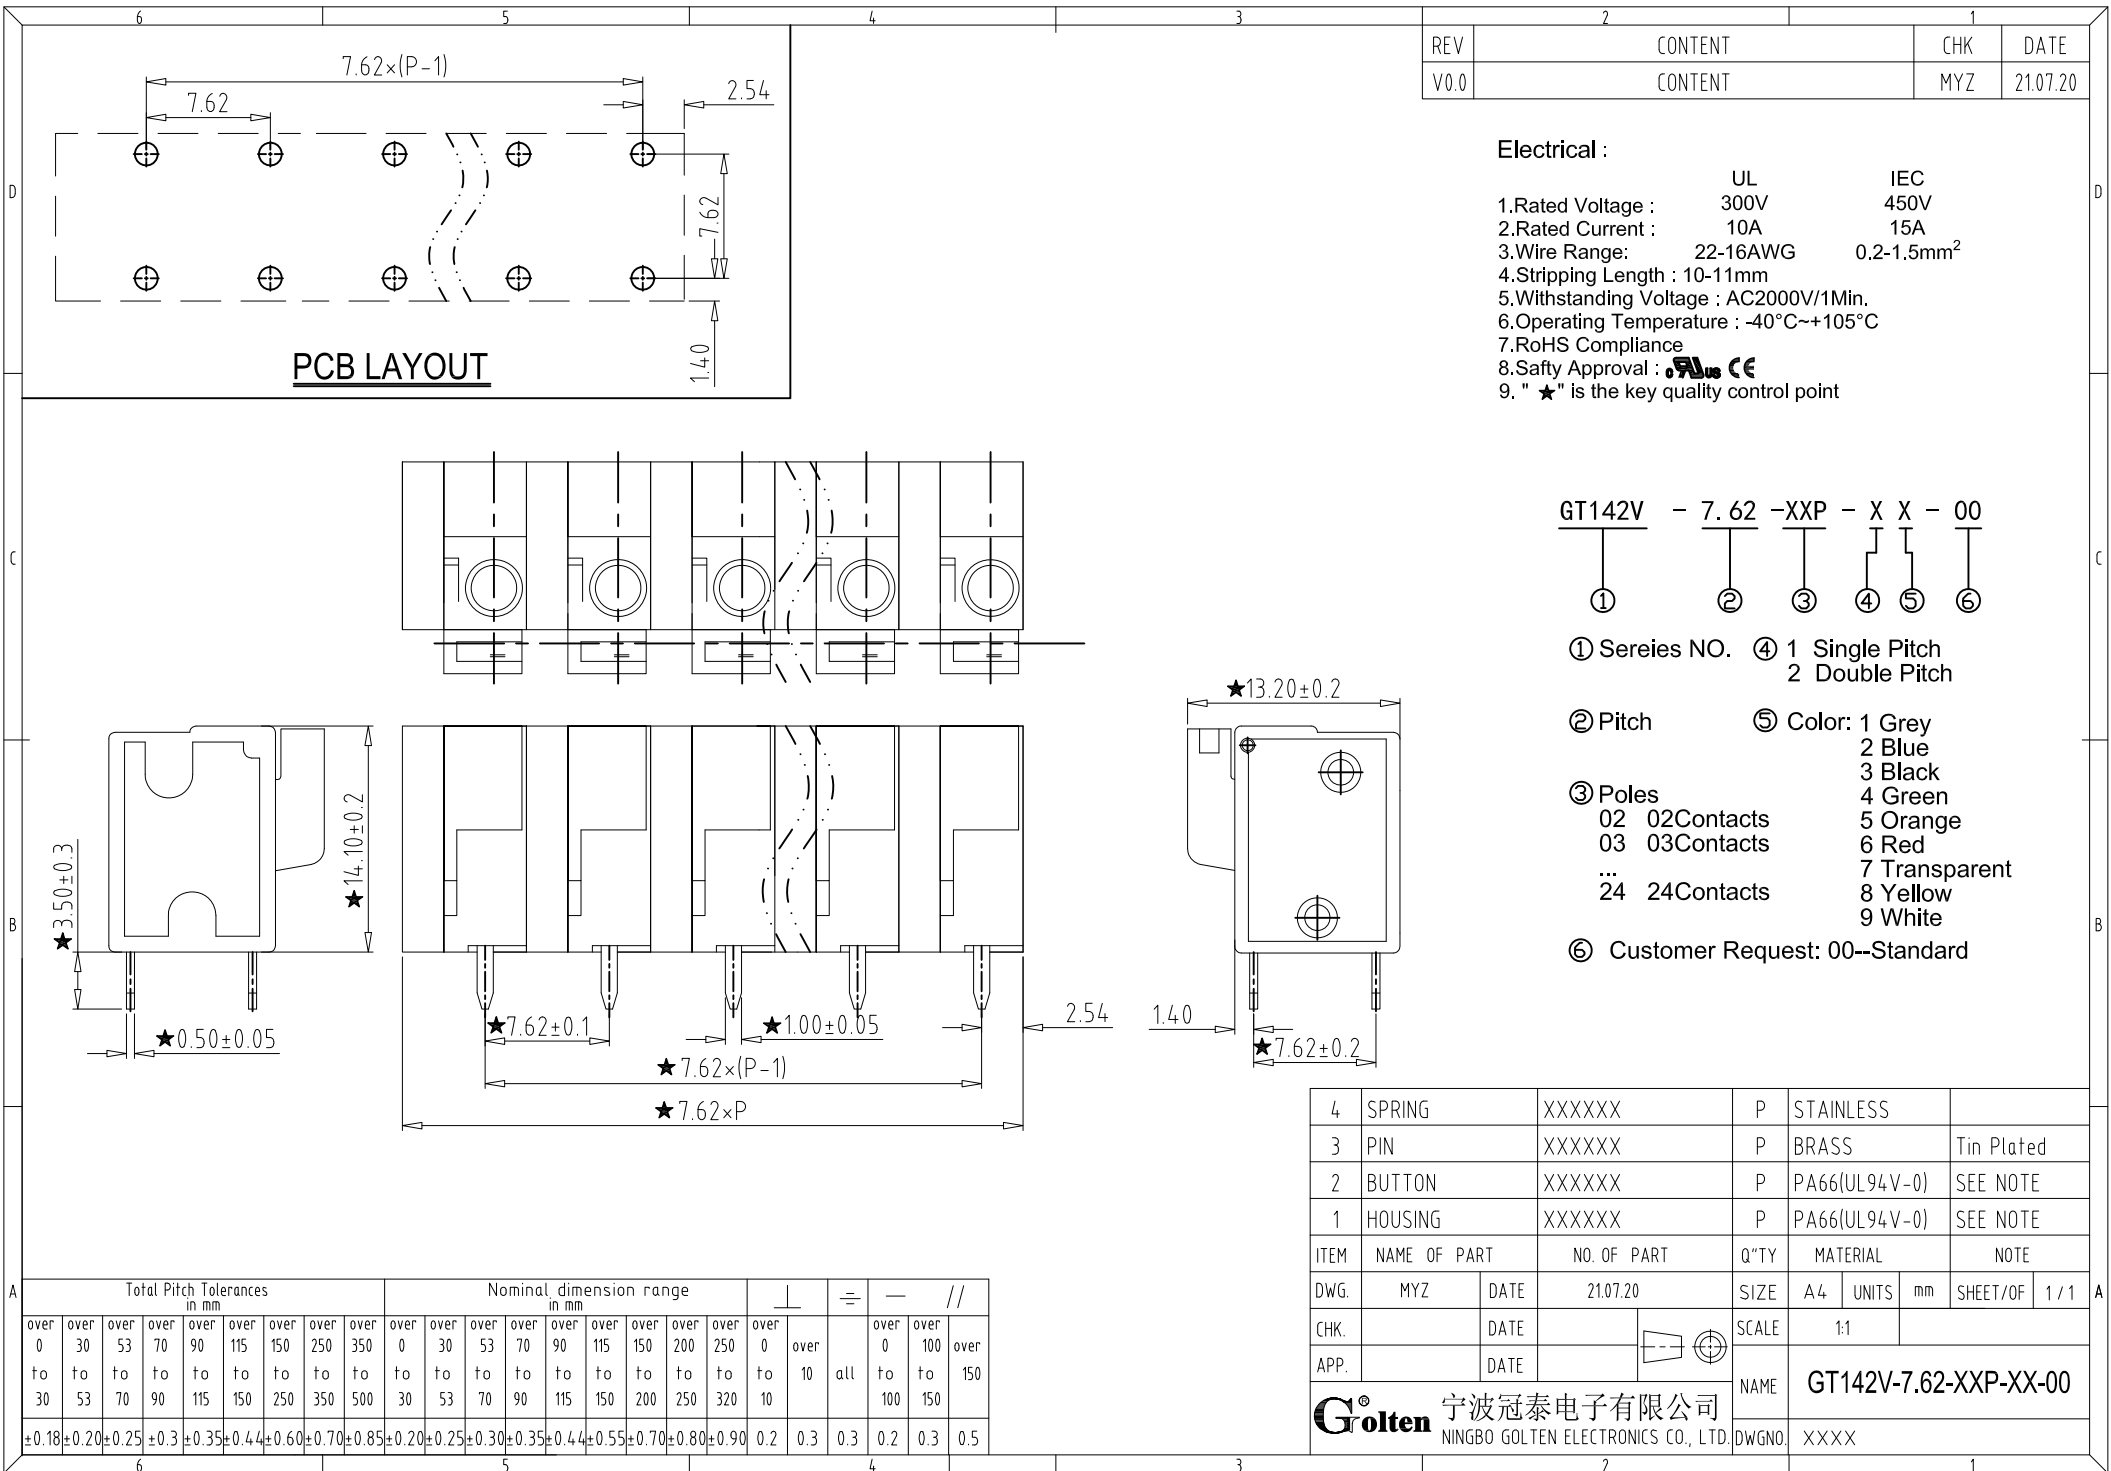

PCB LAYOUT

REV	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	21.07.20

Electrical :

1.Rated Voltage :	UL 300V	IEC 450V
2.Rated Current :	10A	15A
3.Wire Range:	22-16AWG	0.2-1.5mm ²
4.Stripping Length :	10-11mm	
5.Withstanding Voltage :	AC2000V/1Min.	
6.Operating Temperature :	-40°C~+105°C	
7.RoHS Compliance		
8.Safety Approval :	UL, CE	
9. " ★ " is the key quality control point		

GT142V - 7.62 -XXP - X X - 00

① Sereies NO. ④ 1 Single Pitch
2 Double Pitch

② Pitch ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

③ Poles 02 02Contacts
03 03Contacts
24 24Contacts

⑥ Customer Request: 00--Standard

4	SPRING	XXXXXX	P	STAINLESS	
3	PIN	XXXXXX	P	BRASS	Tin Plated
2	BUTTON	XXXXXX	P	PA66(UL94V-0)	SEE NOTE
1	HOUSING	XXXXXX	P	PA66(UL94V-0)	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	MYZ	DATE	21.07.20	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	GT142V-7.62-XXP-XX-00
				DWGNO.	XXXX