

**ELECTRICAL:**


1. Rate Voltage / Current: AC250V ; 5A /10A/ 16A
2. Electric Intensity: 800V Min
3. Contact Resistance: 30MΩ Max
4. Insulation Resistance: 100MΩ Min
5. Response Speed : ≤1°C Min
6. No. of Automatic Cycles: 6000 Max ( Resistive Load)

Code	Action temperature (°C)	Reset temperature	Voltage AC(V)
55	55±5	≥30±10	250
60	60±5	40±10	250
65	65±5	45±10	250
70	70±5	50±10	250
75	75±5	55±10	250
80	80±5	60 ±10	250
85	85±5	65 ±10	250
90	90±5	70 ±10	250
95	95±5	75 ±10	250
100	100±5	80 ±10	250

Code	Action temperature (°C)	Reset temperature	Voltage AC(V)
105	105±5	70 ±12	250
110	110±5	75 ±12	250
115	115±5	80 ±12	250
120	120±7	85 ±12	250
125	125±7	90 ±12	250
130	130±7	95 ±12	250
135	135±7	100 ±12	250
140	140±7	105 ±12	250
145	145±7	110 ±12	250
150	150±7	110 ±12	250
155	155±5	130 ±12	250
160	160±5	135 ±12	250

How to Order:

KSD9700 - 5A xx - C - xx - xx

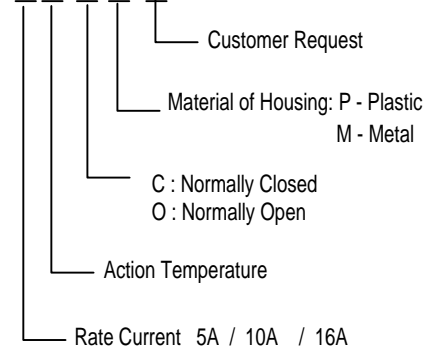

**YUHUI ELECTRONIC TECH. CO.,LTD.**

**GENERAL TOLERANCE**

X.* ± 5.0°	X. ± 0.30
.X* ± 3.0°	.X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

**DESIGN:** 黄 语 惠

**DATE:** 2020.02.28

**CHECK:** 忠 诚

**DATE:** 2020.03.02

**AUDIT:** 忠 诚

**DATE:** 2020.03.02

**APPROVE:** 忠 诚

**DATE:** 2020.03.02

**DWG. NO.:**

YH-KSD9700-001A-001

**PART NO.:**

KSD9700-5A65-C-M

**TITLE:**

KSD9700 Thermal Protector

<b>REV.:</b> 01	<b>UNIT.:</b> mm	<b>SCALE.:</b> 1:1	<b>PAGE.:</b> 1/1	
--------------------	---------------------	-----------------------	----------------------	--