

International  
**IR** Rectifier

## MBR16.. Series MBRB16.. Series

SCHOTTKY RECTIFIER

16 Amp

$$I_{F(AV)} = 16\text{Amp}$$

$$V_R = 35 - 45\text{V}$$

### Major Ratings and Characteristics


Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	16	A
$V_{RRM}$ range	35-45	V
$I_{FSM}$ @ $t_p = 5\mu\text{s}$ sine	1800	A
$V_F$ @16Apk, $T_J = 125^\circ\text{C}$	0.57	V
$T_J$ range	-65 to 150	$^\circ\text{C}$

### Description/ Features

The MBR16.. Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to  $150^\circ\text{C}$  junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- $150^\circ\text{C}$   $T_J$  operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

### Case Styles

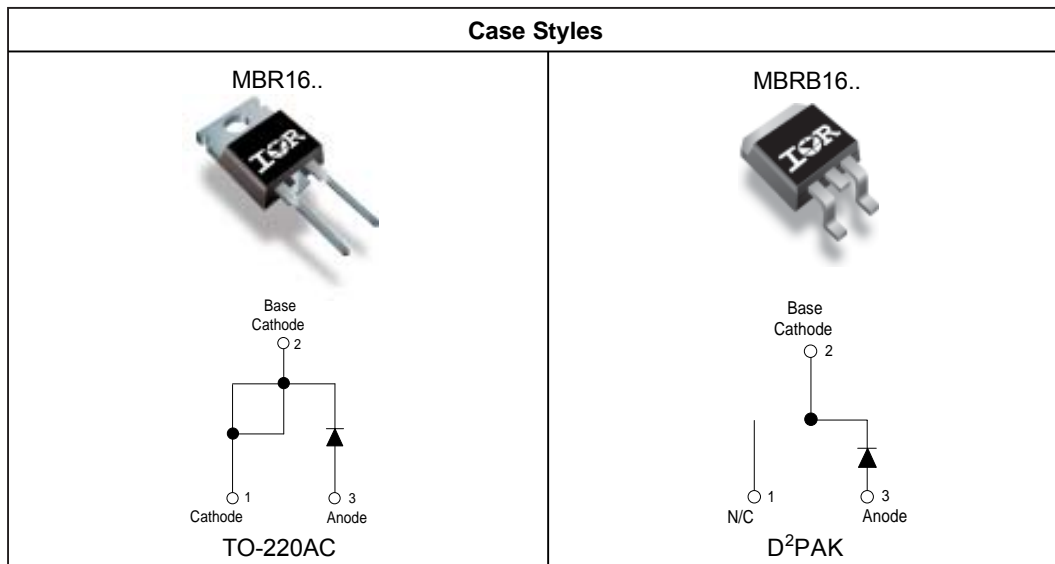

## Voltage Ratings

Part number	MBR1635	MBR1645
$V_R$ Max. DC Reverse Voltage (V)	35	45
$V_{RWM}$ Max. Working Peak Reverse Voltage (V)		

## Absolute Maximum Ratings

Parameters	MBR16..	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current	16	A	@ $T_C = 134^\circ\text{C}$ , (Rated $V_R$ )
$I_{FSM}$ Non-Repetitive Peak Surge Current	1800	A	5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse Following any rated load condition and with rated $V_{RWM}$ applied
	150		Surge applied at rated load condition halfwave single phase 60Hz
$E_{AS}$ Non-Repetitive Avalanche Energy	24	mJ	$T_J = 25^\circ\text{C}$ , $I_{AS} = 3.6$ Amps, $L = 3.7$ mH
$I_{AR}$ Repetitive Avalanche Current	3.6	A	Current decaying linearly to zero in 1 $\mu\text{sec}$ Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical

## Electrical Specifications

Parameters	MBR16..	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop (1)	0.63	V	@ 16A $T_J = 25^\circ\text{C}$
	0.57	V	@ 16A $T_J = 125^\circ\text{C}$
$I_{RM}$ Max. Instantaneous Reverse Current (1)	0.2	mA	$T_J = 25^\circ\text{C}$
	40	mA	$T_J = 125^\circ\text{C}$ Rated DC voltage
$C_T$ Max. Junction Capacitance	1400	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$
$L_S$ Typical Series Inductance	8.0	nH	Measured from top of terminal to mounting plane
$dv/dt$ Max. Voltage Rate of Change (Rated $V_R$ )	10000	V/ $\mu\text{s}$	

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle <2%

## Thermal-Mechanical Specifications

Parameters		MBR16..	Units	Conditions	
T <sub>J</sub>	Max. Junction Temperature Range	-65 to 150	°C		
T <sub>stg</sub>	Max. Storage Temperature Range	-65 to 175	°C		
R <sub>thJC</sub>	Max. Thermal Resistance Junction to Case	1.50	°C/W	DC operation	
R <sub>thCS</sub>	Typical Thermal Resistance, Case to Heatsink	0.50	°C/W	Mounting surface, smooth and greased	
wt	Approximate Weight	2 (0.07)	g (oz.)		
T	Mounting Torque	Min. 6 (5)	Kg-cm (lbf-in)		
		Max. 12 (10)			
Case Style		TO-220AC, D <sup>2</sup> PAK			JEDEC
Marking Device		MBR1645			Case Style TO-220
		MBRB1645			Case Style D <sup>2</sup> Pak

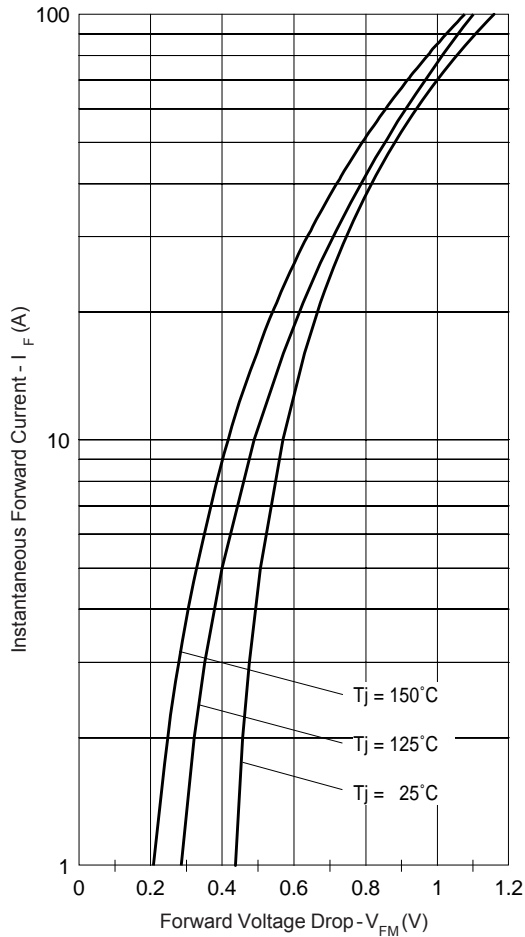


Fig. 1 - Maximum Forward Voltage Drop Characteristics

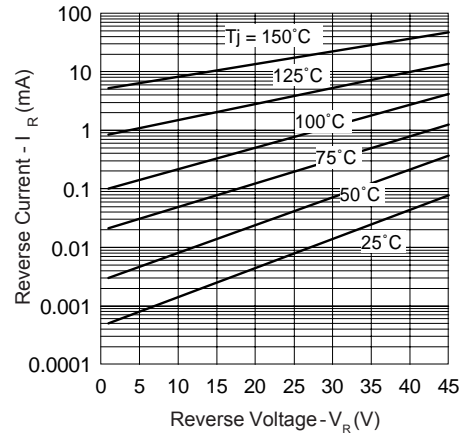


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

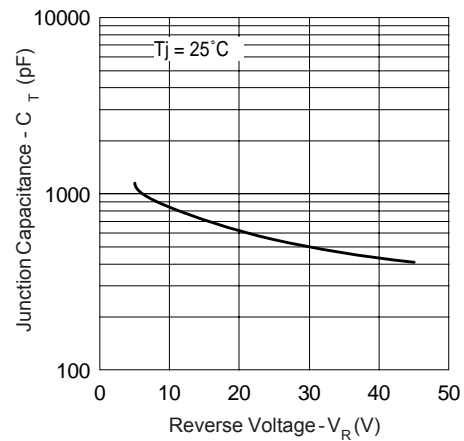


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

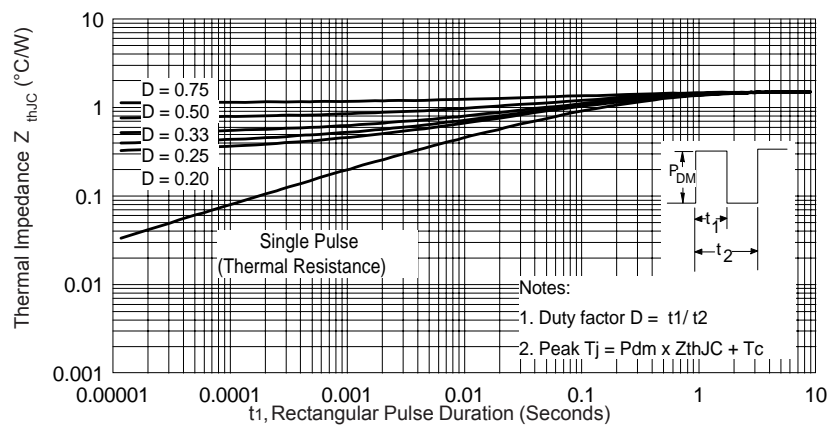


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics

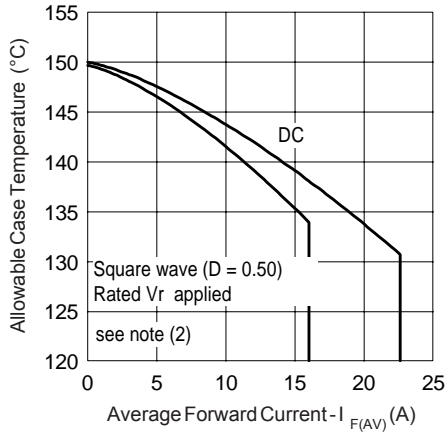


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current

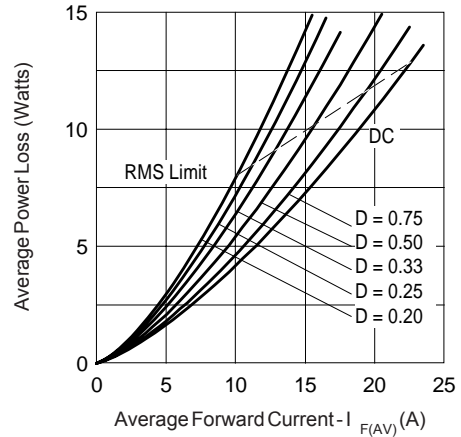


Fig. 6 - Forward Power Loss Characteristics

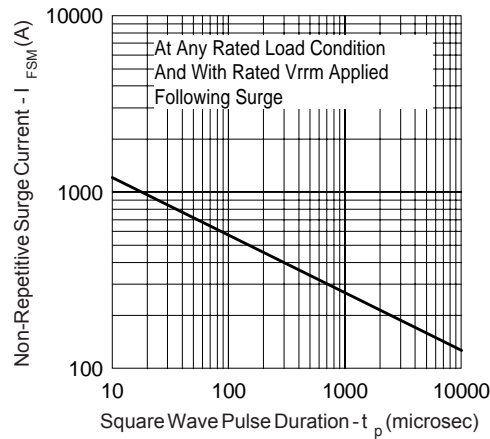


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

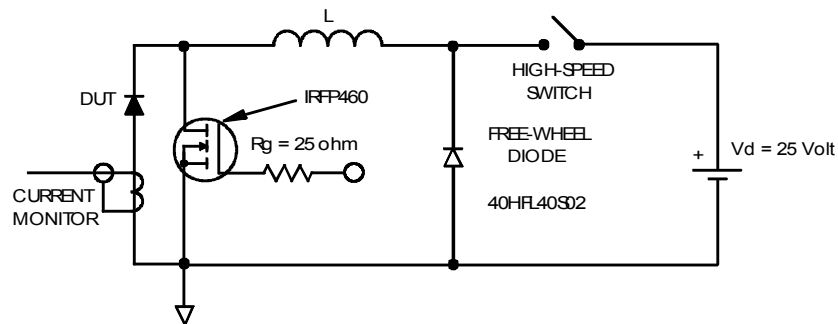




Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used:  $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$ ;

$P_d$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);

$P_{d_{REV}}$  = Inverse Power Loss =  $V_{R1} \times I_{R1} (1 - D)$ ;  $I_{R1} @ V_{R1}$  = rated  $V_R$  applied

## Outline Table

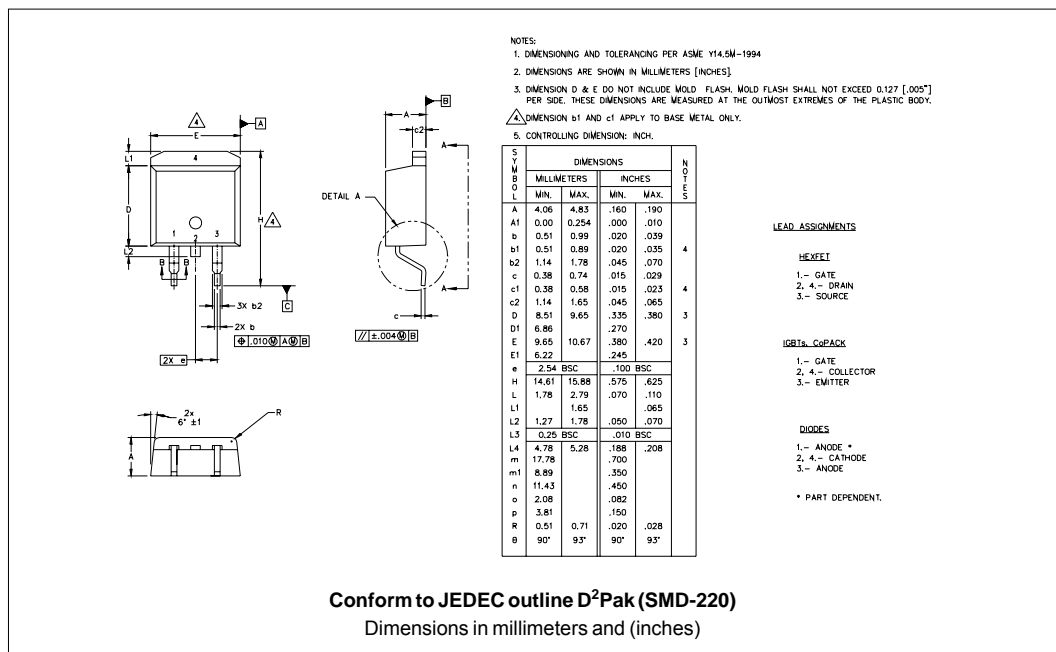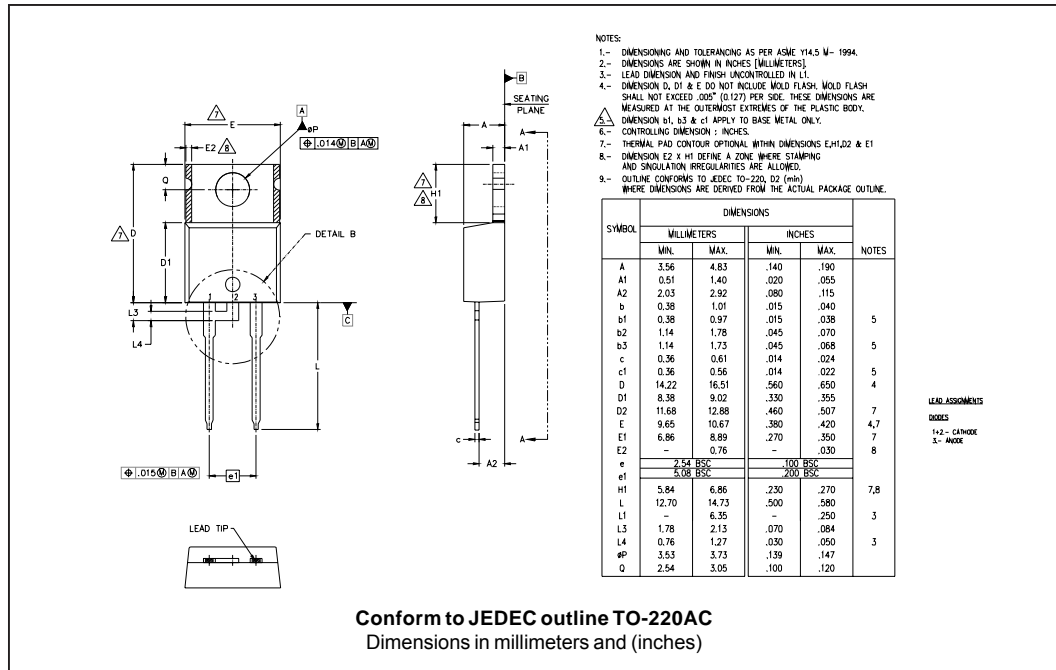

## Part Marking Information

**TO-220AC**

EXAMPLE: THIS IS A MBR1645  
LOT CODE 1789  
ASSEMBLED ON WW 19, 2001  
IN THE ASSEMBLY LINE "C"

**D<sup>2</sup>Pak**

EXAMPLE: THIS IS A MBRB1645  
LOT CODE 8024  
ASSEMBLED ON WW 02, 2000

## Tape & Reel Information

SECTION Y-Y

**NOTES:**

- 1.0 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±.02
- 2.0 CAMBER NOT TO EXCEED 1mm in 100mm
- 3.0 MATERIAL: CONDUCTIVE BLACK STYRENE ALLOY
- 4.0 K<sub>0</sub> MEASURED FROM A PLANE ON THE INSIDE BOTTOM OF THE POCKET TO THE TOP SURFACE OF THE CARRIER
- 5.0 MEASURED FROM CENTRELINE OF SPROCKET HOLE TO CENTRELINE OF POCKET
- 6.0 VENDOR: (OPTIONAL)
- 7.0 MUST ALSO MEET REQUIREMENTS OF EIA STANDAR #EIA-481A TAPING OF SURFACE MOUNT COMPONENTS FOR AUTOMATIC PLACEMENT
- 8.0 SURFACE RESISTIVITY OF MOLDED MATL. MUST MEASURE LESS OR EQUAL TO 10<sup>6</sup> OHMS PER SQUARE. MEASURED IN ACCORDANCE TO PROCEDURE GIVEN IN ASTM D-257 & ASTM D-991
- 9.0 TOTAL LENGTH PER REEL MUST BE 45 METERS
- 10.0 © CRITICAL

A <sub>0</sub>	10.50	+/- 0.1
B <sub>0</sub>	15.80	+/- 0.1
B <sub>2</sub>	10.25	+/- 0.1
K <sub>0</sub>	4.90	+/- 0.1
F	11.50	+/- 0.1
P <sub>1</sub>	16.00	+/- 0.1
W	24.00	+/- 0.3

Dimensions in millimeters and (inches)

## Ordering Information Table

## Device Code

MBR	B	16	45	TRL	-
1	2	3	4	5	6

1

- Schottky MBR Series

2

- Package Style:

- none = TO-220
- B = D<sup>2</sup>PAK

3

- Current Rating (16 = 16A)

4

- Voltage Ratings

35 = 35V

45 = 45V

5

- • none = Tube

- TRR = Tape & Reel (Right Oriented)
- TRL = Tape & Reel (Left Oriented)

6

- • none = Standard Production

- PbF = Lead-Free

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 06/06