



東莞市智旭電子有限公司
JYH HSU (JEC) ELECTRONICS LTD.,

文件编号: P006
 版本: 1
 制定日期: 2021.07.01

规格承认书
SPECIFICATION FOR APPROVAL

客户名称

Customer: _____

品名 METALLIZED POLYPROPYLENE FILM CAPACITOR
 Part Name: 金属化聚丙烯膜电容器

客户料号

Customer Part No: _____

承認規格 SMCD-505J 800VDC P=27.5mm
 Approve Item: SMCD-226J 450VDC P=27.5mm

供應商料号 SMCD505J0800D22806
 Part Number: SMCD226J0450D22806

日期

Date: **2023-01-28**

客户承认 Customer Acknowledgement	供应商承认 Supplier Acknowledgement  广东: 智旭电子有限公司
----------------------------------	---

台湾: 智旭电子有限公司
 JYH HSU (JEC) ELECTRONICS LTD
 台湾台中大里市仁路 222 巷 64 号
 TEL: 886-422752703
 FAX: 886-422752236
 E-mail: jec@jeccap.cn

JYH HSU (JEC) ELECTRONICS LTD
 东莞市道窖镇蔡白村道厚路律冲桥头旁
 TEL: 0769-88313601 88313602
 FAX: 0769-88313603
[Http://www.jec365.com](http://www.jec365.com)


规格目录中所列的产品, 材料和尺寸其他内容如有更改, 恕不另行通知。

The products, materials and dimensions listed in the specification catalog are subject to change without prior notice.

金屬化聚丙烯膜電容器 (直流支撐) - SMCD series

Metallized Polypropylene Film Capacitor (For DC Link)

■ 尺寸 Dimension :

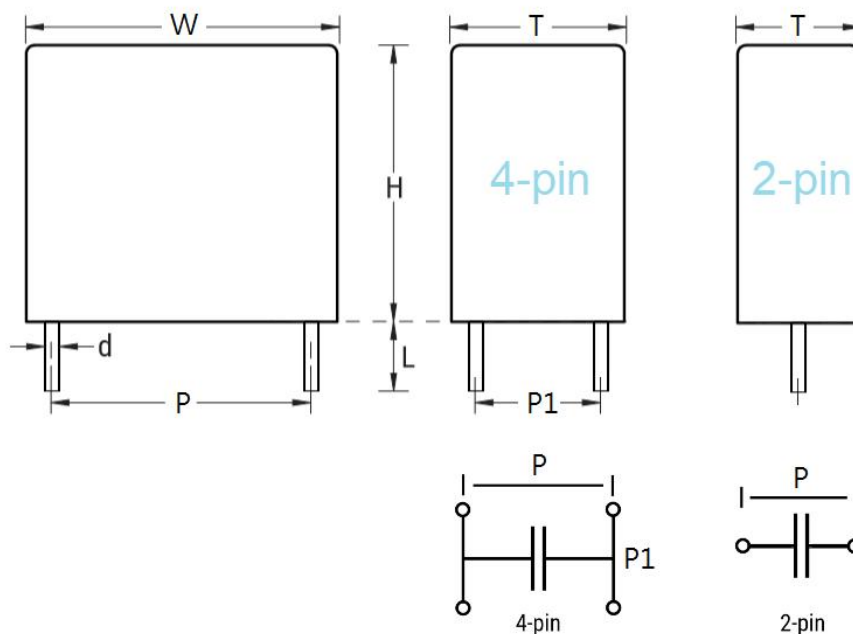

規格描述 Description	尺寸單位 Dimension in mm						dV/dt	ESR ⁽¹⁾ @10kHz	I _{RMS} ⁽²⁾
	W _{±1.0}	H _{±1.0}	T _{±1.0}	P _{±1.0}	P1 _{±0.5}	d _{±0.05}	(V/μs)	(mΩ)	(A)
505J/800VDC	31	25	14	27.5	/	0.8	65	18	7.3
226J/450VDC	31	37	22	27.5	/	0.8	65	5	10

Notes

(1) Equivalent series resistance typical values at f = 10 kHz



(2) Maximum RMS current at 10 kHz, $\theta_{amb}=70^{\circ}\text{C}$ (cooling-air temperature), $\Delta\theta_{case}=15^{\circ}\text{C}$ (container temperature rise)

(3) Tinned wires - standard lead wire length 6 (+1/-2) mm

金屬化聚丙烯膜電容器 (直流支撐) - SMCD series

Metallized Polypropylene Film Capacitor (For DC Link)

■ 外形圖 Outline Drawing (For Example)

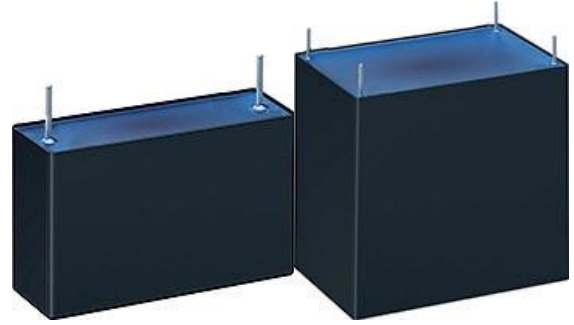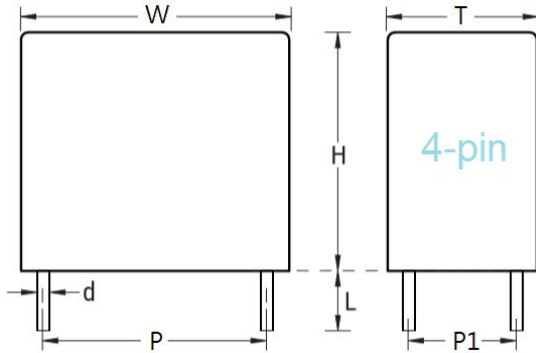

■ 典型應用 Typical Applications

高性能直流濾波器的應用 ·
逆變器、工業和高端電源、太陽能逆變器、充電樁等

High performance DC filter applications
(Inverter, industrial and high-end power supply, solar inverters, charging piles, etc.)

■ 特徵 Features

金屬化聚丙烯膜結構
採用矩形塑料盒型設計
塑料外殼封裝 (UL94V-0) · 環氧樹脂密封
使用 2 或 4 根鍍錫引線

Metalized polypropylene film membrane structure with a rectangular, plastic box-type design,
Plastic shell package (UL94v-0), Epoxy resin sealing and uses 2 or 4 tinned wires.

■ 規格 Specifications

參考標準 Reference Standard	GB/T 17702 (IEC 61071)			
氣候類別 Climatic Category	40/85/56			
最大允許外殼溫度 (T_{case})	-40°C~105°C			
Maximum permissible case temperature (T_{case})	+85°C to 105°C: Decreasing factor 1.35% per °C for U_N 85°C			
應用 Application	DC filtering, DC link			
容值範圍 Capacitance Range	1.0 μ F ~ 140 μ F			
額定電壓 Rated Voltage (U_{NDC})	450V/500Vdc	600Vdc	800Vdc	900Vdc
	1000Vdc	1100Vdc	1200Vdc	--
容值公差 Capacitance Tolerance	$\pm 5\%$ (J) 、 $\pm 10\%$ (K)			
引線 Leads	Tinned wires - standard lead wire length 6 (+1/-2) mm			
包裝 Packaging	Packed in cardboard trays with protection for the terminals			

金屬化聚丙烯膜電容器 (直流支撐) - SMCD series

Metallized Polypropylene Film Capacitor (For DC Link)

■ 電氣特性 Electrical Characteristics


端子間耐受電壓 Withstanding voltage (V_{TT})		1.5 x U_{NDC} for 10 s, cut off current 10 mA		
絕緣電阻 Insulation Resistance($IR \times C_N$)		$\geq 10000s$ (25°C, 100Vdc, 60 seconds)		
浪湧電壓 Surge Voltage		1.5 * V_{NDC} for maximum 10 times in lifetime at T = 25°C \pm 5°C		
過電壓 Overvoltage	1.1 x U_N	有負荷時間的 30%	一天內最長持續時間 Maximum duration within one day	30% of on-load duration
	1.15 x U_N	30 分鐘		30 minutes
	1.2 x U_N	5 分鐘		5 minutes
	1.3 x U_N	1 分鐘		1 minutes
自感 Self Inductance (L_S)		<1nH per mm of lead spacing)		
最大峰值電流 Maximum peak current \uparrow (A)		$\uparrow = C \times dV/dt$		

■ 產品代碼構成 Product code system (For Example)

SMCD	505	J	0800	D	2	28	06
型號 Type	容值 Capacitance	公差 Tolerance	額定電壓 Rated Voltage	交直流 AC/DC	引線類型 Lead form	引線間距 Lead Pitch	引線長度 Lead Length
SMCD= DC Link Capacitor (Boxed)	505 =5,000nF =5 μ F	J= \pm 5% K= \pm 10%	0500=500V 0600=600V 0800=800V 0900=900V 1000=1000V 1200=1200V	D=DC	2=2 pins 4=4 pins P1=10.2mm 5=4 pins P1=12.7mm 6=4 pins P1=20.3mm	28=27.5mm 38=37.5mm 53=52.5mm	06=6.0mm 08=8.0mm

■ 標示 Mark (For Example)

Marking

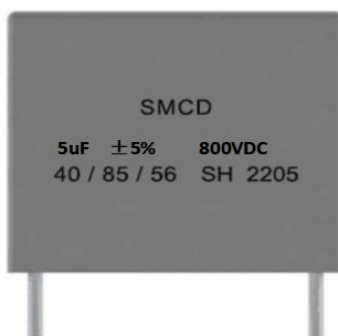

1. SMCD: Type Construction	2. Capacitance: 5 μ F
3. Capacitors Tolerance: \pm 5%	4. Rated Voltage: 800VDC
5. Climatic Category: 40/85/56	6. Self-Healing in nature such as SH
7. Date Code : 2205, Year = 2022, Weeks = 05	

金屬化聚丙烯膜電容器 (直流支撐) - SMCD series

Metallized Polypropylene Film Capacitor (For DC Link)

■ 檢驗要求 Inspection requirements

測試項目 Test item	性能要求 Performance requirements	試驗條件 Conditions of test		
例行試驗 Routine test				
外觀檢查 External inspection	按規定清晰的標記 Legible marking as specified	--		
尺寸 Dimensions	見規格圖紙 See specification drawing	--		
電容量 Capacitance	在規定公差內 Within the tolerance specified	室溫 1 kHz at room temperature		
損耗因素 $\tan\delta$ Dissipation Factor	$1\mu\text{F} \leq C_N < 10\mu\text{F}$, $DF \leq 10 \times 10^{-4}$ $10\mu\text{F} \leq C_N < 20\mu\text{F}$, $DF \leq 20 \times 10^{-4}$ $20\mu\text{F} \leq C_N \leq 140\mu\text{F}$, $DF \leq 40 \times 10^{-4}$	室溫 1 kHz at room temperature		
端子間的電壓試驗 Voltage test between terminal	無可見損傷或刺穿 · 沒有閃絡 No visible damage or puncture, No flashover	$1.5 \times U_{NDC}$ 持續時間 Duration 10 seconds		
絕緣電阻 Insulation resistance	$IR \times C_N \geq 10,000s$	25°C, 100Vdc, 60seconds		
型式試驗 Type Tests				
引出端強度試驗 Robustness of terminations	無斷線, 電容器無損壞 No wire breakage and no damage of capacitor	Tensile Ua1 (Duration : 10s±1s)		
		Wire diameter	Section	Load
		$d \leq 0.8\text{mm}$	$S \leq 0.5\text{mm}^2$	10N (±10%)
		$d \leq 1.25\text{mm}$	$S \leq 1.2\text{mm}^2$	20N (±10%)
		Bending Ubmethod 1 (4*90°, Duration:2s/bend)		
		Wire diameter	Section modulus	Load
		$d \leq 0.8\text{mm}$	$\leq 0.050\text{mm}^3$	5N (±10%)
$d \leq 1.25\text{mm}$	$\leq 0.019\text{mm}^3$	10N (±10%)		
耐焊接熱 Resistance to soldering heat	沒有可見的損壞 No visible damage (1) $\Delta C/C \leq 0.5\%$ of the initial value (2) Increase of $\tan\delta \leq 0.005$	無需預先乾燥, 方法 1A ; No pre-drying, method 1A 焊錫槽 Solder Bath: 260±5°C 持續時間 Duration 10±1s		
振動 Vibration		頻率 F=10 Hz to 55 Hz 振幅 Amplitude±0.35mm 測試持續時間 Test duration: 10 frequency cycles 3 個軸向互成 90° 3 axes offset from each other by 90° 1 倍頻程/分鐘 1 octave/min		
端子間的電壓試驗 Voltage test between terminals	(1) $\Delta C/C \leq 0.5\%$ of the initial value (2) Increase of $\tan\delta \leq 1.2 \times \text{initial } \tan\delta + 0.0001$ (3) $IR \geq 50\%$ of specified values	$1.5 \times U_{NDC}$ at T_{amb} 持續時間 Duration 60 s		

金屬化聚丙烯膜電容器 (直流支撐) - SMCD series

Metallized Polypropylene Film Capacitor (For DC Link)

■ 檢驗要求 Inspection requirements

測試項目 Test item	性能要求 Performance requirements	試驗條件 Conditions of test
衝擊放電試驗 Surge discharge test	(1) $\Delta C/C \leq 1.0\%$ of the initial value (2) $\tan\delta \leq 1.2 \times \text{initial } \tan\delta + 0.0001$	$1.1 \times U_{NDC}$ 放電次數 Number of discharges: 5 時間推移 Time lapse: every 2 min (10 min total) 在衝擊放電試驗之後的 5 分鐘內 Within 5 min after the surgedischarge test $1.5 \times U_{NDC}$ at T_{amb} , 持續時間 Duration 60 s
自愈性試驗 Self-healing test	(1) $\Delta C/C \leq 0.5\%$ of the initial value (2) $\tan\delta \leq 1.2 \times \text{initial } \tan\delta + 0.0001$	$1.5 \times U_{NDC}$, 持續時間 Duration 10 s 自愈性擊穿次數 Number of clearings ≤ 5 , 以 100V/s 升壓直到 5 次自愈或 $2.5 \times U_{NDC}$, 持續 10s Increase the voltage at 100 V/s till 5 clearings occur or until voltage reach max. of $2.5 \times U_{NDC}$ for a duration of 10 s
溫度變化 Change of temperature	無擊穿或閃絡 No puncturing or flashover 允許自愈擊穿 Self healing punctures are permitted (1) $\Delta C/C \leq 2.0\%$ of the initial value (2) Increase of $\tan\delta \leq 0.015$	Test Nb: 上限溫度 $T_{max.} = +85^{\circ}\text{C}$ 下限溫度 $T_{min.} = -40^{\circ}\text{C}$ 過渡時間 Transition time: 1h, 5 cycles
恒定濕熱試驗 Damp heat steady state		Test Ca: $T = 40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ $\text{RH} = 93\% \pm 3\%$ 持續時間 Duration 56 days
端子間的電壓試驗 Voltage test between terminals		$1.5 \times U_{NDC}$ at T_{amb} 持續時間 Duration 60 s
熱穩定性試驗 Thermal stability test under overload conditions	溫升 Temperature rise $< 1^{\circ}\text{C}$ (1) $\Delta C/C \leq 2.0\%$ of the initial value (2) Increase of $\tan\delta \leq 1.2 \times \text{initial } \tan\delta + 0.015$	自然冷卻 Natural cooling $T_{amb} \pm 5^{\circ}\text{C}$ $1.21 \times P_{max.} = (U_2/2) \times W_2 \times C \times \tan\delta =$ $1.21 \times (I_{max.}^2 / W_2 \times C) \times \tan\delta_2$ with $W_2 = 2 \times p \times f_2$ For I_{RMS} 見參考資料 see specific reference data $f_2 = 10 \text{ kHz}$ 持續時間 Duration 48 h 在試驗的最後 6 h · 每 1.5 h 測量一次溫度 Measure the temperature every 1.5 h during the last 6 h
端子間的耐久性試驗 Endurance test between terminals	(1) $\Delta C/C \leq 3.0\%$ of the initial value (2) Increase of $\tan\delta \leq 0.015$	順序 Sequence: $1.3 \times U_{NDC}$ at $T_{max.} = 85^{\circ}\text{C}$ 持續時間 Duration 500 h 1000 x discharge at $1.4 \times \hat{I}$ (最大峰值電流 Maximum peak current) $1.3 \times U_{NDC}$ at $T_{max.} = 85^{\circ}\text{C}$ 持續時間 Duration 500 h

金屬化聚丙烯膜電容器 (直流支撐) - SMCD series

Metallized Polypropylene Film Capacitor (For DC Link)

■ 薄膜電容器焊接指南 Soldering Guidelines for Film Capacitors

聚丙烯膜電容器對熱特別敏感 (聚丙烯膜的熔點為 160°C ~ 170°C) , 波峰焊可能具有破壞性 , 尤其是對於小型聚丙烯膜電容器 (引線間距為 5 mm 至 15 mm) , 焊接過程中必須非常小心。

一般來說 , IEC 出版物 61760-1 第 2 版中的波峰焊接曲線可作為成功焊接的可靠指南。(請參見圖 1)

Polypropylene capacitors are especially sensitive to heat (the melting point of polypropylene is 160 – 170°C).

Wave soldering can be destructive, especially for mechanically small polypropylene capacitors (with lead spacing of 5 – 15 mm), and great care must be taken during soldering. In general, the wave soldering curve from IEC Publication 61760-1 Edition 2 serves as a solid guideline for successful soldering. See Figure 1.

通孔的薄膜電容器不建議採用回流焊。將電容器暴露在超過上述建議限值可能會導致電容器退化或永久性損壞。

Reflow soldering is not recommended for through-hole film capacitors. Exposing capacitors to a soldering profile in excess of the recommended limits may result in degradation or permanent damage to the capacitors.

請勿將聚丙烯膜電容器通過粘合劑固化爐來固化表面安裝部件的樹脂 , 須在表面安裝零件固化後插入通孔零件。

如果通孔零件必須通過粘合劑固化過程 , 請諮詢 WINDAY , 討論烘箱中的實際溫度分布。

建議最多進行兩次焊接循環。在第二次焊接循環之前 , 請留出時間使電容器表面溫度恢復到正常溫度。


Do not place the polypropylene capacitor through an adhesive curing oven to cure resin for surface mount components.

Insert through-hole parts after curing the surface mount parts. Contact WINDAY to discuss the actual temperature profile in the oven, if through-hole components must pass through the adhesive curing process.

A maximum two soldering cycles is recommended.

Allow time for the capacitor surface temperature to return to normal before the second soldering cycle.

■ 波峰焊建議 Wave Soldering Recommendations(Figure 1)

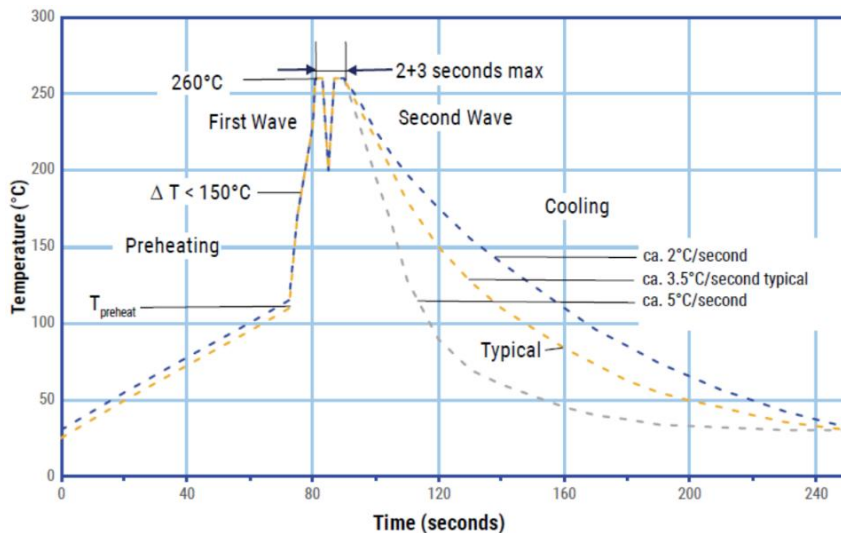

金屬化聚丙烯膜電容器 (直流支撐) - SMCD series

Metallized Polypropylene Film Capacitor (For DC Link)


■ 波峰焊建議 Wave Soldering Recommendations (Continue)

1. 該表顯示了焊接過程的最高設置溫度 The tables indicates the maximum set-up temperature of the soldering process

介電薄膜材料 Dielectric FilmMaterial	最高預熱溫度 Max. PreheatTemperature		最高峰值焊接溫度 Max.Peak SolderingTemperature	
	Pitch≤ 15 mm	Pitch> 15 mm	Pitch≤ 15 mm	Pitch> 15 mm
聚乙酯膜 Polyester	130°C	130°C	270°C	270°C
聚丙烯膜 Polypropylene	110°C	130°C	260°C	270°C

2. 電容器內部測得的最高溫度 The maximum temperature measured inside the capacitor

介電薄膜材料 Dielectric FilmMaterial	元件內部測得的最高溫度 Maximum Temperature Measured Inside the Element
聚乙酯膜 Polyester	160°C
聚丙烯膜 Polypropylene	110°C

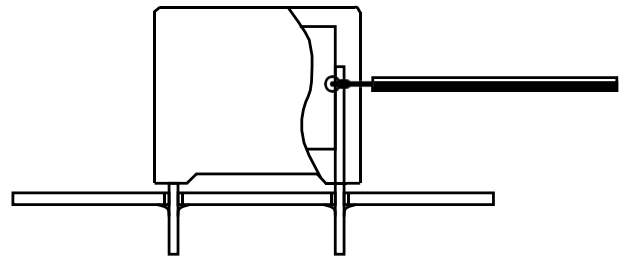

設置溫度，使元件內的最高溫度低於極限：

Set the temperature so that inside the element the maximum temperature is below the limit.

■ 儲存條件和期限 Storage conditions and duration

包裝好的電容器應存放在清潔、通風、乾燥的庫房內，不靠近熱源，不受陽光直射，嚴禁與化學試劑、酸和有害氣體一起儲存。T_{stg} = +5°C 至 +35°C，最大相對濕度為 75%，無冷凝，儲存一年。




Packaged capacitors should be kept in clean, ventilated, dry coffers, not near the heat source, not subject to direct sunlight, is strictly prohibited and chemical reagents, acid and harmful gas storage together.

T_{stg} = +5°C to +35°C with relative humidity of maximum 75% without condensation, storage for one year.

金屬化聚丙烯膜電容器 (直流支撐) - SMCD series

Metallized Polypropylene Film Capacitor (For DC Link)

■ 典型波形 Typical Waveforms

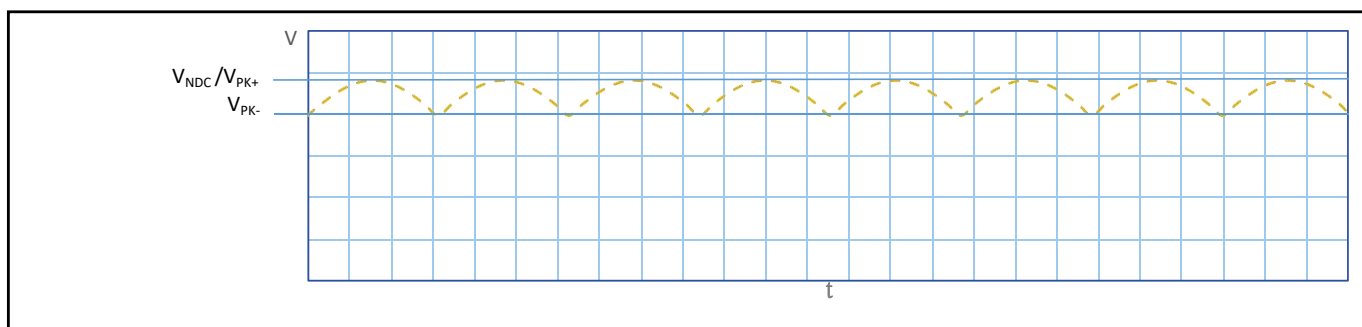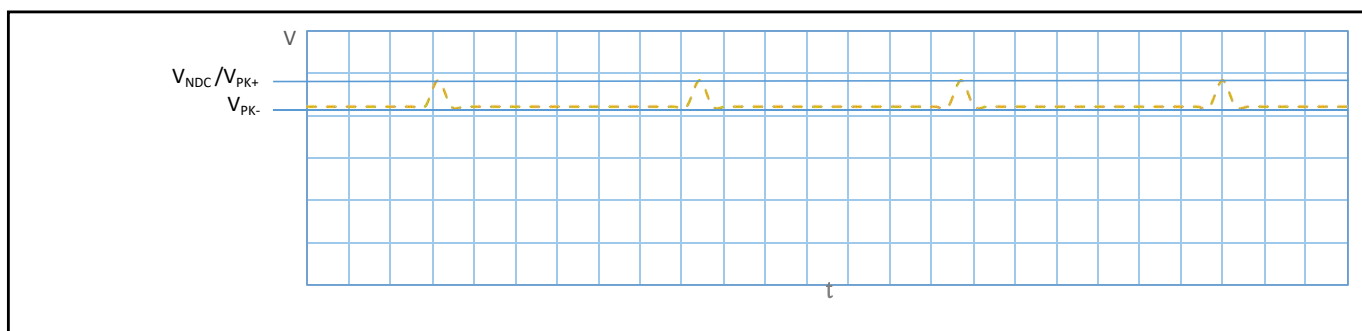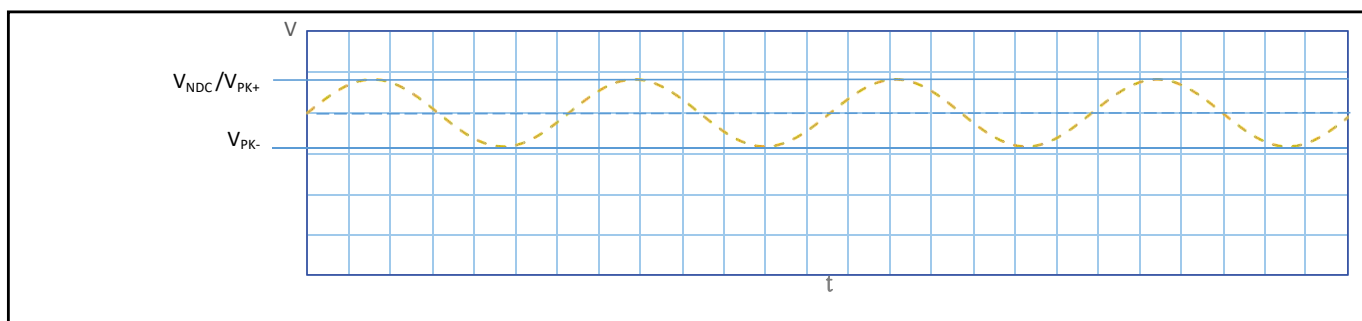

The applied peak-to-peak ripple voltage shall not exceed $0.1 \times V_{NDC}$

The peak voltage shall not exceed the rated voltage V_{NDC}