



JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD

TO-263-2L Plastic-Encapsulate MOSFETS

CJB3R0SN10B N-Channel Power MOSFET


$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
100V	2.5mΩ@10V	180A

DESCRIPTION

The CJB3R0SN10B uses shielded gate trench technology and design to provide excellent $R_{DS(on)}$ with low gate charge. It can be used in a wide variety of applications

TO-263-2L

1. GATE
2. DRAIN
3. SOURCE




FEATURES

- Low $R_{DS(on)}$
- Low Gate Charge

APPLICATIONS


- High efficiency power supply
- Secondary synchronus rectifier

MARKING



3R0SN10B = Device code.
Solid dot = Green molding compound device,
if none, the normal device.
XXXX = Code.

EQUIVALENT CIRCUIT



MAXIMUM RATINGS ($T_J=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	100	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	$I_D^{①}$	180	A
Pulsed Drain Current	$I_{DM}^{①②}$	720	A
Single Pulsed Avalanche Energy	$E_{AS}^{③}$	740	mJ
Power Dissipation	$P_D^{①}$	250	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}^{⑤}$	62.5	$^{\circ}\text{C/W}$
Thermal Resistance from Junction to Case	$R_{\theta JC}^{①}$	0.5	$^{\circ}\text{C/W}$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55~+150	$^{\circ}\text{C}$

MOSFET ELECTRICAL CHARACTERISTICS

$T_J=25^{\circ}\text{C}$ unless otherwise specified

Parameter	Symbol	Test Condition		Min	Typ	Max	Unit
Off characteristics							
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 1mA$		100	-	-	V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = 80V, V_{GS} = 0V$	$T_J = 25^{\circ}C$	-	-	1.0	μA
			$T_J = 125^{\circ}C$	-	-	100	
Gate-body leakage current	I_{GSS}	$V_{DS} = 0V, V_{GS} = \pm 20V$		-	-	± 100	nA
On characteristics ^④							
Gate-threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$		2.0	3.0	4.0	V
Static drain-source on-sate resistance	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 20A$		-	2.5	3.0	m Ω
Dynamic characteristics							
Input capacitance	C_{iss}	$V_{DS} = 50V, V_{GS} = 0V, f = 100kHz$		-	6400	-	pF
Output capacitance	C_{oss}			-	1130	-	
Reverse transfer capacitance	C_{rss}			-	25	-	
Gate resistance	R_g	$f = 1MHz$		-	1.5	-	Ω
Switching characteristics							
Total gate charge	Q_g	$V_{GS} = 4.5V, V_{DD} = 50V, I_D = 20A$		-	62	-	nC
Total gate charge	Q_g	$V_{GS} = 10V, V_{DD} = 50V, I_D = 20A$		-	116	-	
Gate-source charge	Q_{gs}			-	26	-	
Gate-drain charge	Q_{gd}			-	36	-	
Turn-on delay time	$t_{d(on)}$	$V_{DD} = 50V, V_{GS} = 10V, R_L = 10.5\Omega, R_g = 10\Omega$		-	43	-	ns
Turn-on rise time	t_r			-	59	-	
Turn-off delay time	$t_{d(off)}$			-	146	-	
Turn-off fall time	t_f			-	97	-	
Drain-Source Diode Characteristics							
Drain-source diode forward voltage	V_{SD} ^④	$V_{GS} = 0V, I_S = 20A$		-	-	1.3	V
Continuous drain-source diode forward current	I_S ^①			-	-	180	A
Pulsed drain-source diode forward current	I_{SM} ^{①②}			-	-	720	A
Reverse recovery time	t_{rr}	$di_S/dt = 100A/\mu s, I_S = 20A, V_{DD} = 50V$		-	80	-	ns
Reverse recovery charge	Q_{rr}			-	217	-	nC

Notes:

1. $T_C = 25^{\circ}\text{C}$.







2. Limited only by maximum temperature allowed.

3. $V_{DD} = 50V, V_{GS} = 10V, L = 0.5mH, R_g = 25\Omega$ Starting $T_J = 25^{\circ}\text{C}$.

4. Pulse Test : Pulse Width $\leq 380\mu s$, duty cycle $\leq 2\%$.


5. Device mounted on 1 in² FR-4 board with 2oz. single-sided Copper, in a still air environment with $T_A = 25^{\circ}\text{C}$.

Typical Characteristics ($T_J = 25^\circ\text{C}$, unless otherwise specified)

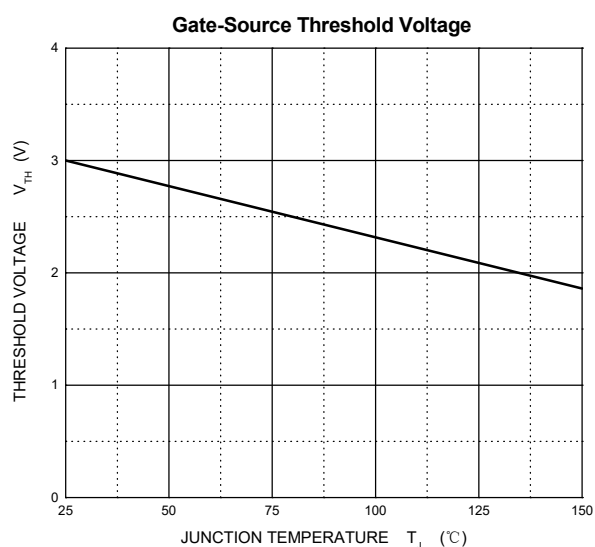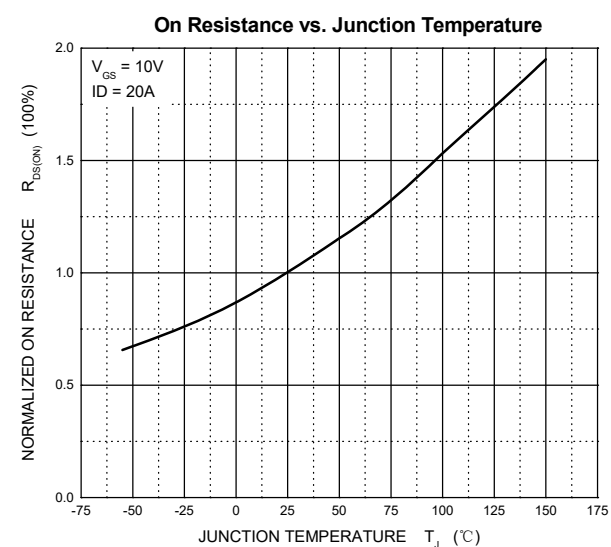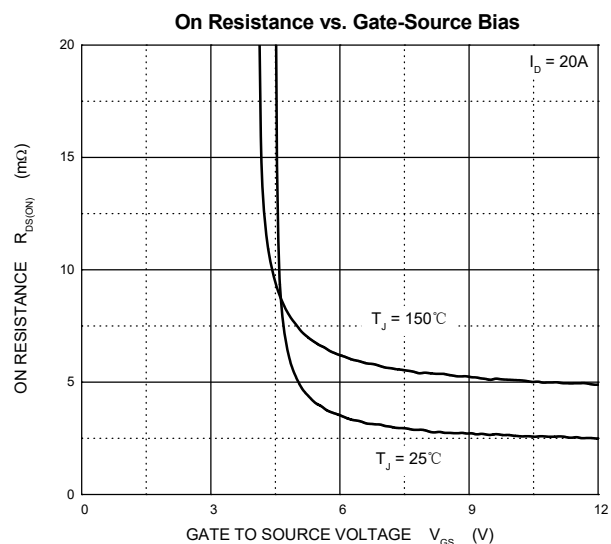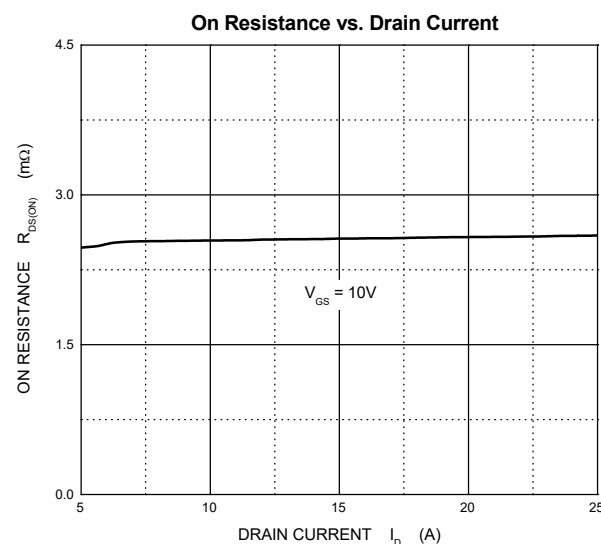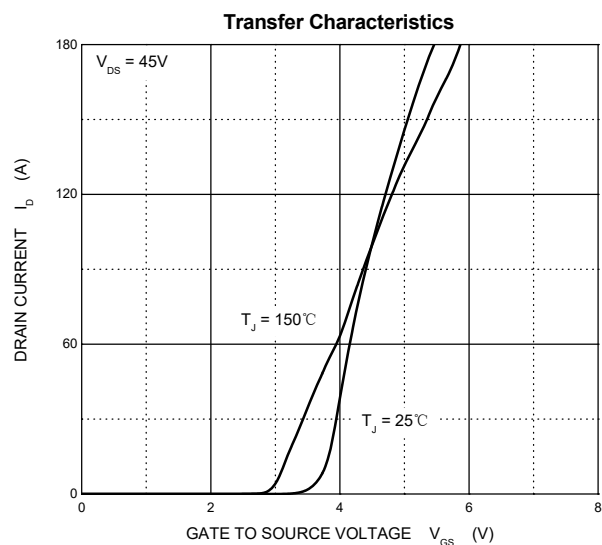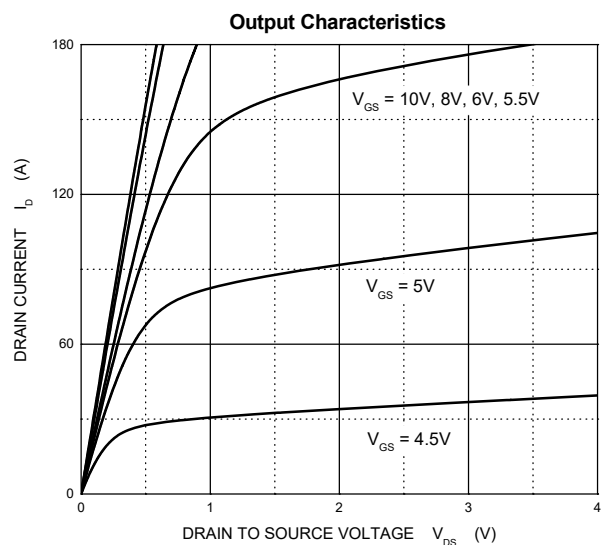


Typical Characteristics ($T_J = 25^\circ\text{C}$, unless otherwise specified)


Typical Capacitances

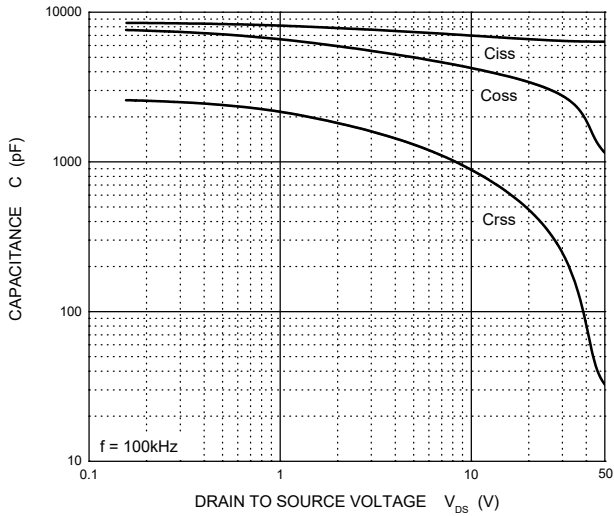


Gate Charge

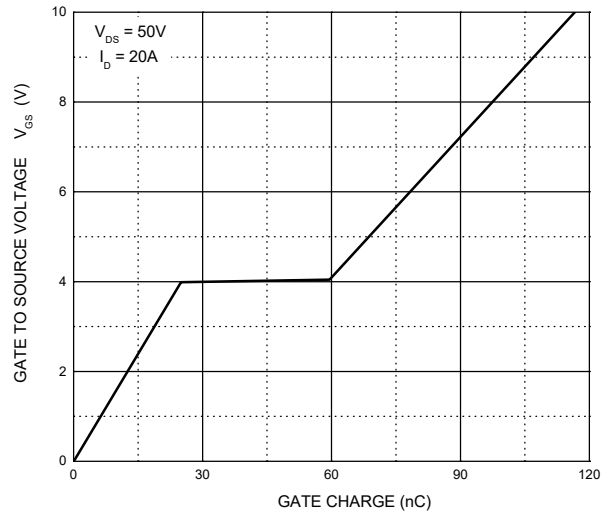


Source-Drain Diode Forward Characteristics

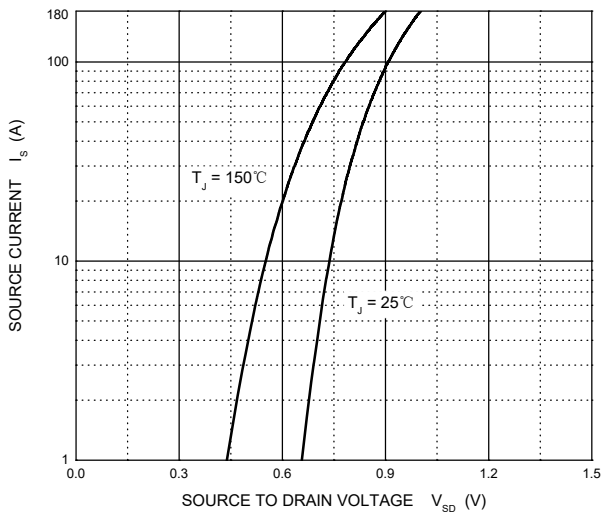

Maximum Safe Operating Area


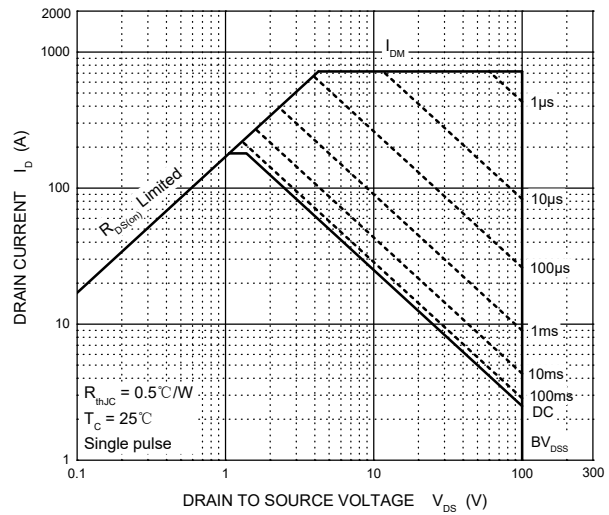


Transient Thermal Impedance, Junction-Case


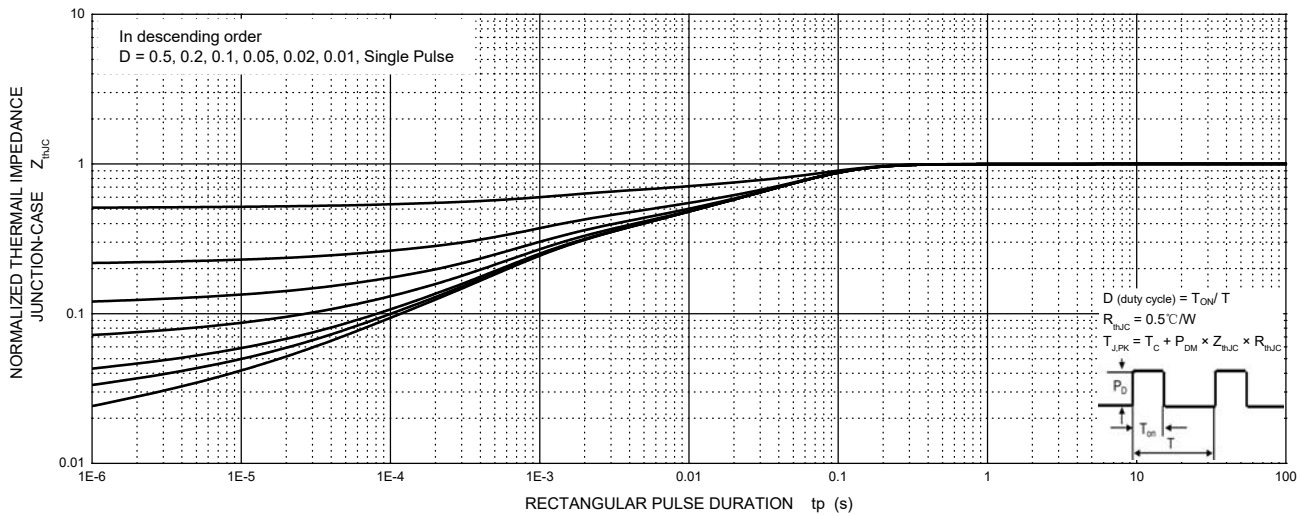


TEST CIRCUIT AND WAVEFORMS



Gate Charge

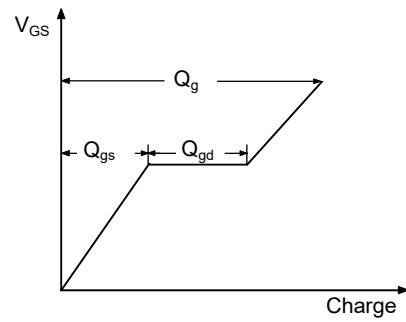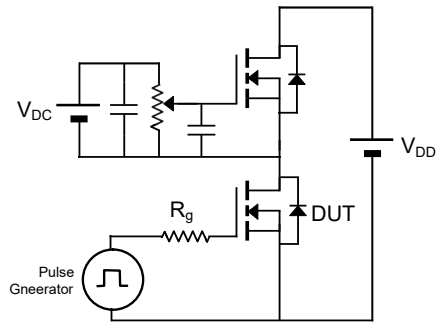



Resistive Load Switching Time

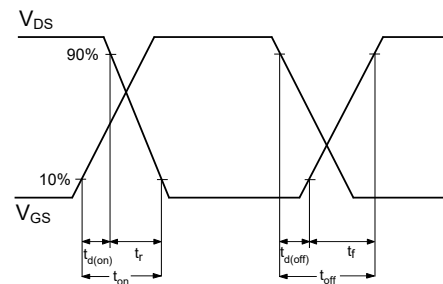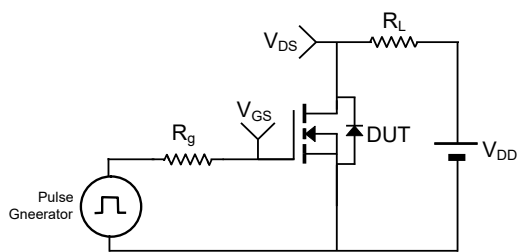


Un-clamped Inductive Load Switching

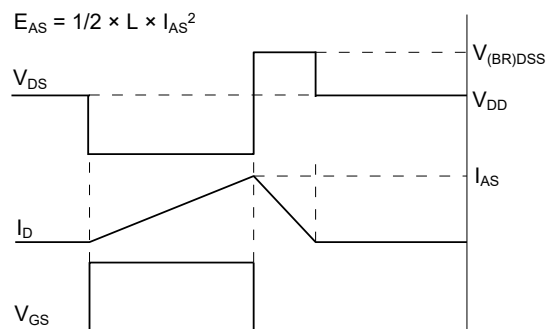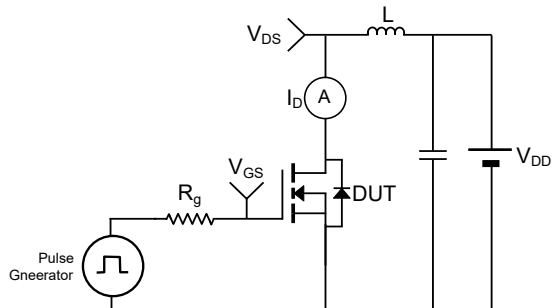

Drain-Source Body Diode Reverse Recovery

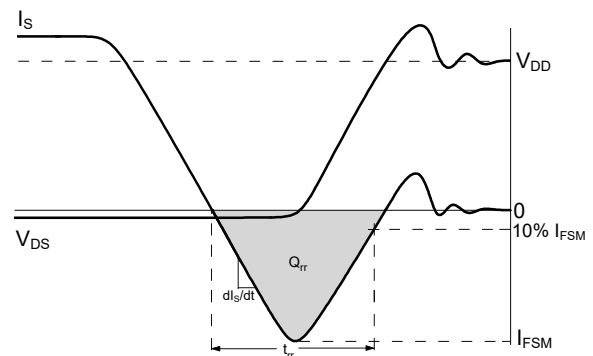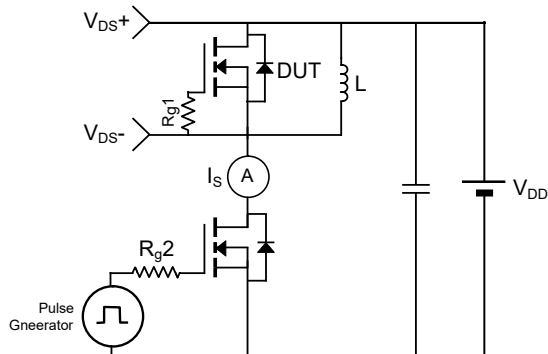


TO-263-2L Package Outline Dimensions

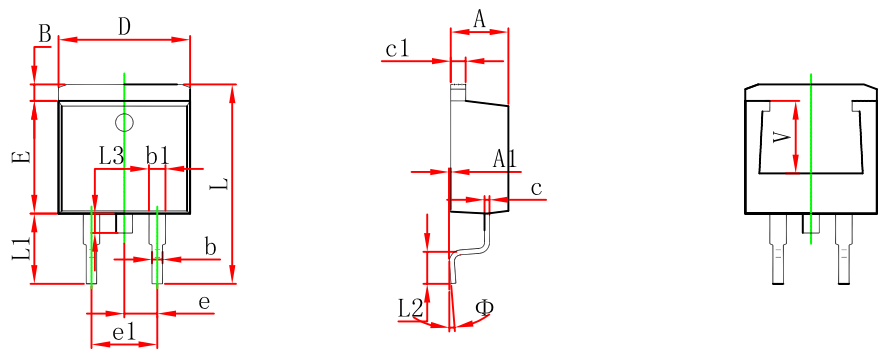

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.470	4.670	0.176	0.184
A1	0.000	0.150	0.000	0.006
B	1.120	1.420	0.044	0.056
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
e	2.540 TYP.		0.100 TYP.	
e1	4.980	5.180	0.196	0.204
L	14.940	15.500	0.588	0.610
L1	4.950	5.450	0.195	0.215
L2	2.340	2.740	0.092	0.108
L3	1.300	1.700	0.051	0.067
Φ	0°	8°	0°	8°
V	5.600 REF.		0.220 REF.	

TO-263-2L Suggested Pad Layout




Note:
1.Controlling dimension:in millimeters.
2.General tolerance:±0.05mm.
3.The pad layout is for reference purposes only.

NOTICE

JSCJ reserves the right to make modifications,enhancements,improvements,corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

TO-263-2L Tape and Reel

TO-263-2L Embossed Carrier Tape

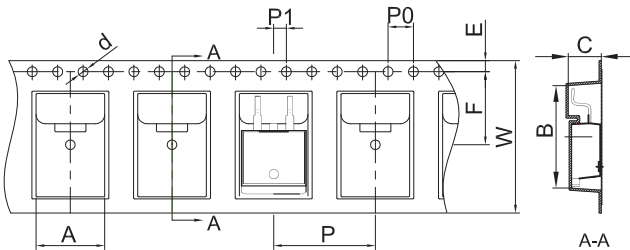


Packaging Description:


TO-263-2L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 800 units per 13" or 33.0 cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
TO-263-2L	10.80	16.13	5.21	Ø1.55	1.75	11.50	4.00	16.00	2.00	24.00

TO-263-2L Tape Leader and Trailer

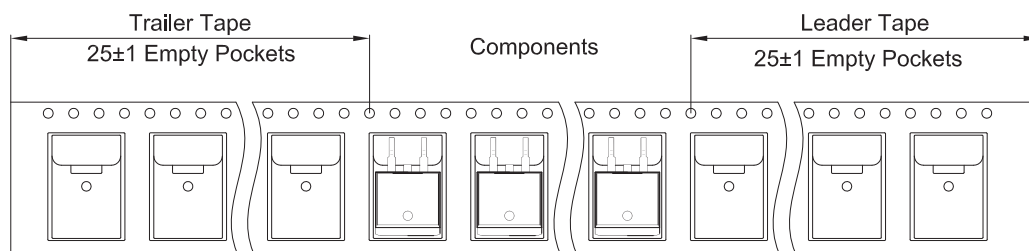

TO-263-2L Reel

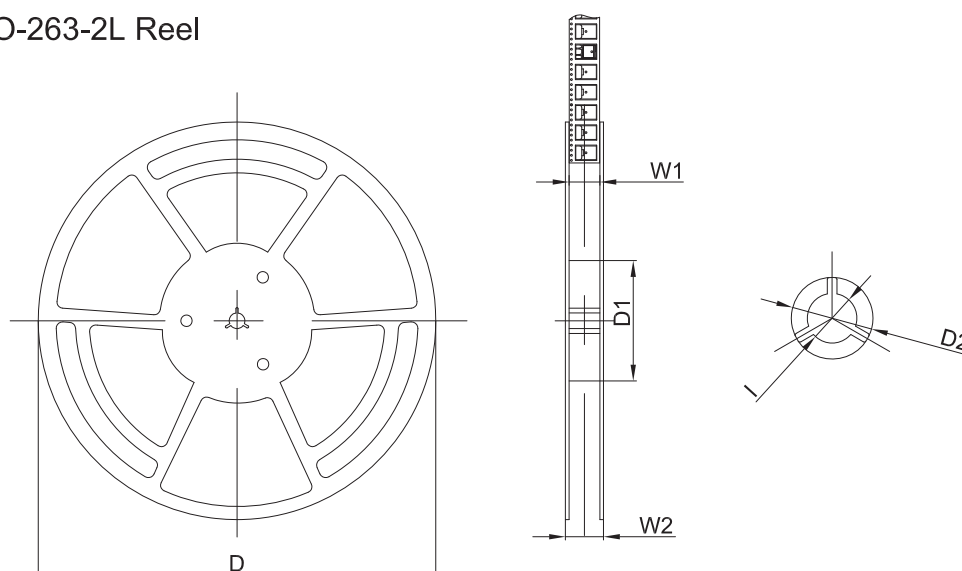

Dimensions are in millimeter						
Reel Option	D	D1	D2	W1	W2	I
13"Dia	Ø330.00	100.00	Ø21.00	24.4	30.4	Ø13.00

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
800 pcs	13 inch	800 pcs	340×336×36	8,000 pcs	400×353×365	