

IC Socket Series


KLS1-217 DUAL-IN-LINE IC Socket 2.54mm With Round Pin

Electrical Characteristics:



Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -45°C~+105°C

Material:

Housing: PBT UL94V ~ 0
 Contacts: PinBrass, TinPlated
 Contacts: Clip-Beryllium copper, Gold Plated

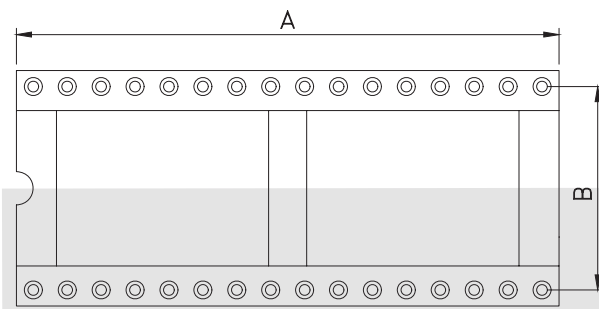

CIRCUITS	DIM.A	DIM.B	DIM.C
06	7.62	7.62	10.16
08	10.16	7.62	10.16
14	17.78	7.62	10.16
16	20.32	7.62	10.16
18	22.86	7.62	10.16
20	25.40	7.62	10.16
22	27.94	7.62	10.16
24	30.48	7.62	10.16
28	35.56	7.62	10.16
24	30.48	15.24	17.78
28	35.56	15.24	17.78
32	40.64	15.24	17.78
40	50.80	15.24	17.78
42	53.34	15.24	17.78
48	60.96	15.24	17.78

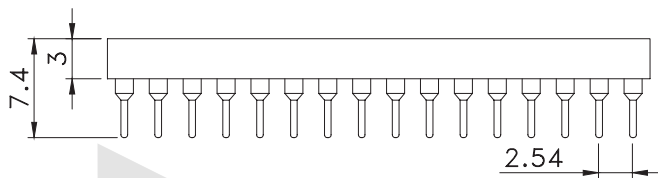

ORDER INFORMATION

Product No.: KLS1-217-XX-Y-1

Pos. NO. _____
 DUAL-IN-LINE IC Socket 2.54mm with Round Pin Series
 Number of Contacts: XX=06-48Pin
 Row spacing Code: 1: B=7.62mm 2: B=15.24mm
 Y-Imported material Z-Domestic material