


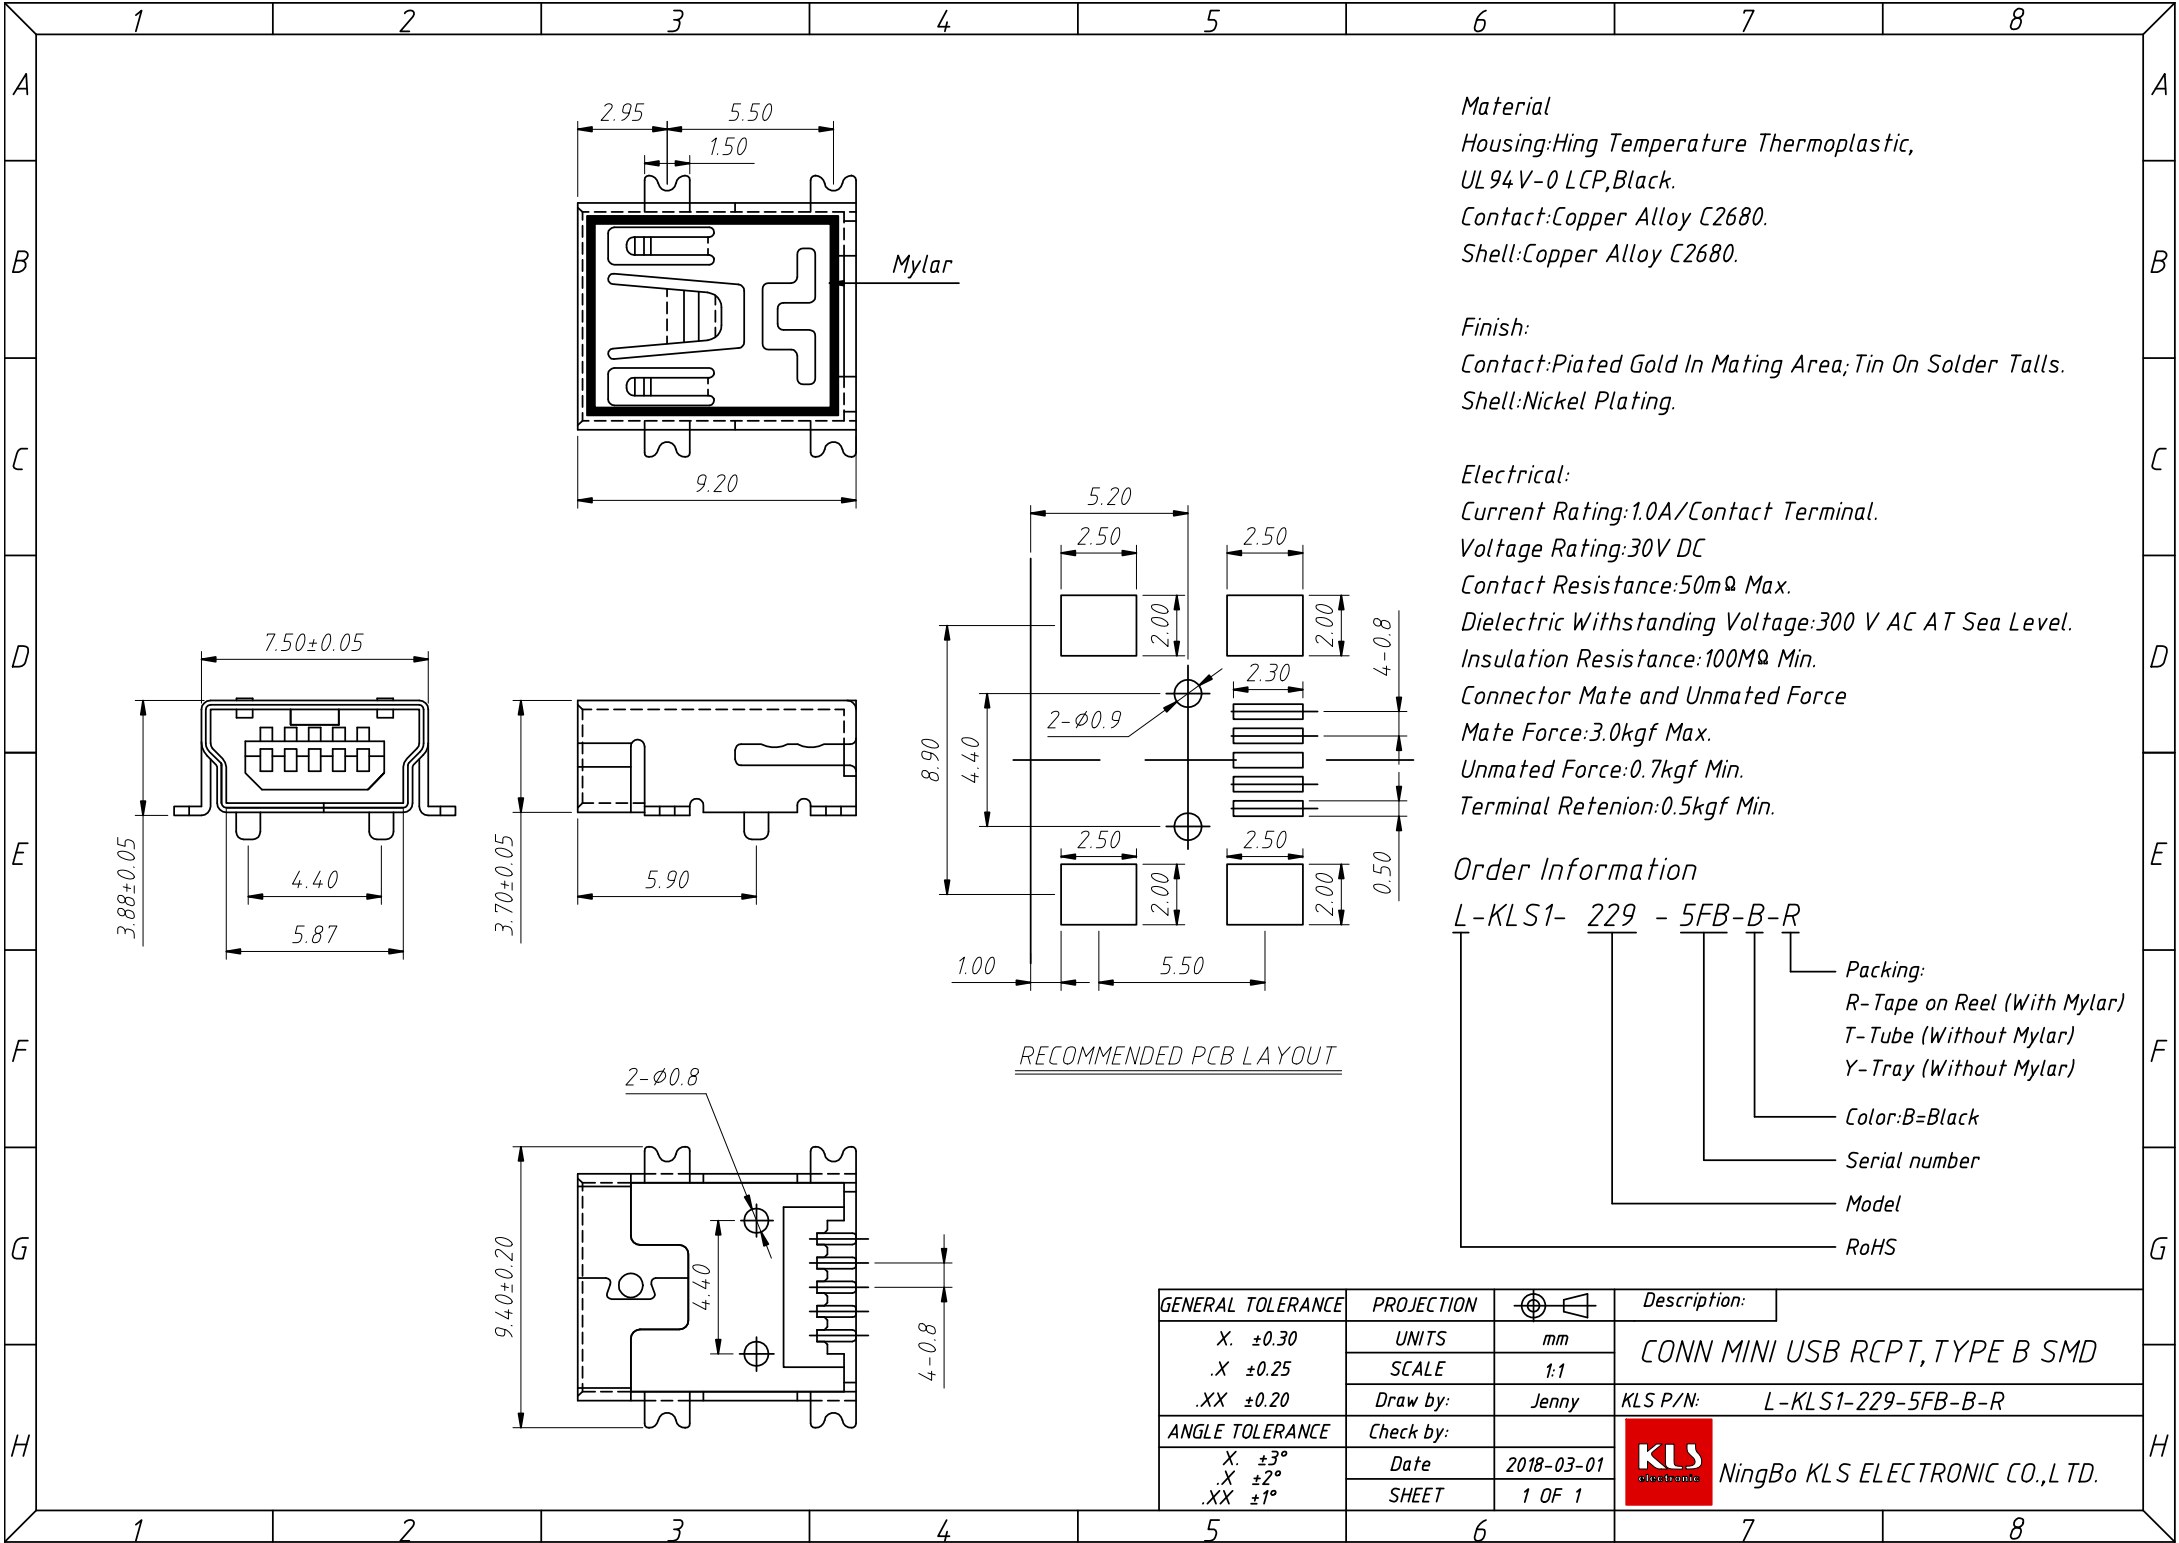

Material
Housing:Hing Temperature Thermoplastic,
UL 94 V-0 LCP,Black.
Contact:Copper Alloy C2680.
Shell:Copper Alloy C2680.

Finish:
Contact:Plated Gold In Mating Area;Tin On Solder Talls.
Shell:Nickel Plating.

Electrical:
Current Rating:1.0A/Contact Terminal.
Voltage Rating:30V DC
Contact Resistance:50mΩ Max.
Dielectric Withstanding Voltage:300 V AC AT Sea Level.
Insulation Resistance:100MΩ Min.
Connector Mate and Unmated Force
Mate Force:3.0kgf Max.
Unmated Force:0.7kgf Min.
Terminal Retenion:0.5kgf Min.

Order Information
L-KLS1- 229 - 5FB-B-R

Packing:
R-Tape on Reel (With Mylar)
T-Tube (Without Mylar)
Y-Tray (Without Mylar)

Color:B=Black
Serial number
Model
RoHS

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.30	UNITS	mm	CONN MINI USB RCPT,TYPE B SMD
.X ±0.25	SCALE	1:1	
.XX ±0.20	Draw by:	Jenny	KLS P/N: L-KLS1-229-5FB-B-R
ANGLE TOLERANCE	Check by:		
X. ±3°	Date	2018-03-01	 NingBo KLS ELECTRONIC CO.,L TD.
.X ±2°	SHEET	1 OF 1	
.XX ±1°			