
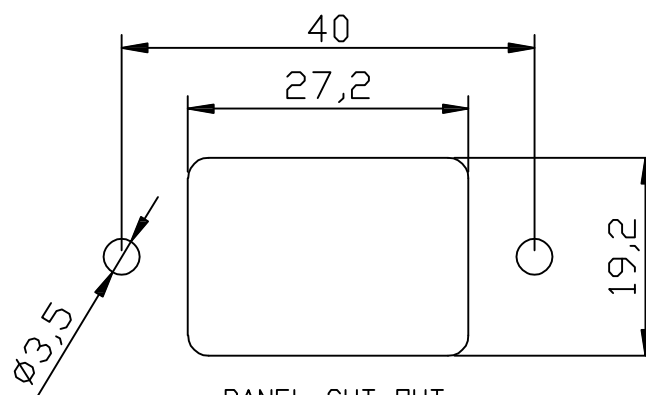
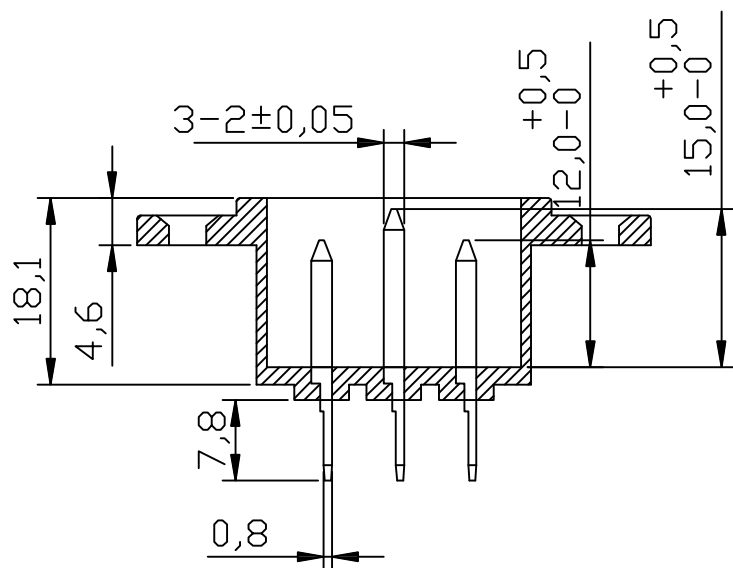
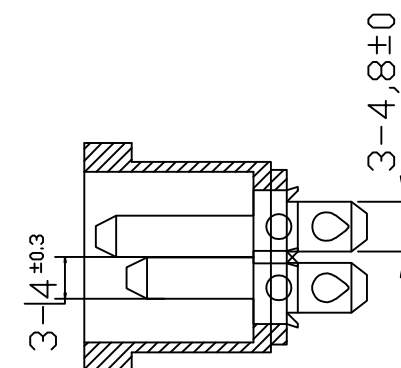
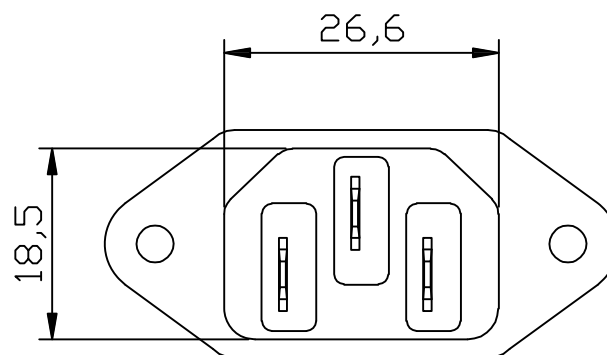


RoHS Compliance

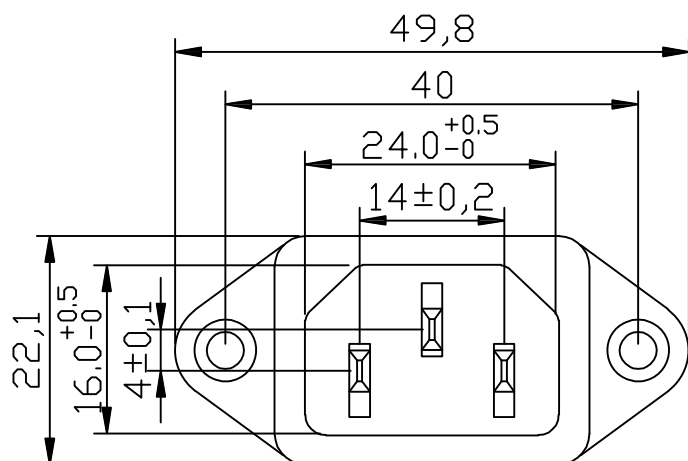

PANEL CUT-OUT

Electrical Characteristics:
Rating Voltage: 250V 10A
Insert And Extract Force: 1.36kgf ~ 6.8kgf
Terminal Strength: ≥80N
Operating Life: ≥5000 cycles
Withstand Voltage:
Between all terminals: 2000VAC(50-60Hz)1min
terminals to base: 3750V AC (50-60Hz)1min
Leakage Current: 1mA
Insulation Resistance: ≥100MΩ 500V DC

ANGLE TOLERANCE	PROJECTION	Description:		
±3°		AC Power Sockets		
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-AS-301
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Daniel	2018-07-10	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ±0.10	Check:	Daniel	2018-07-10	