

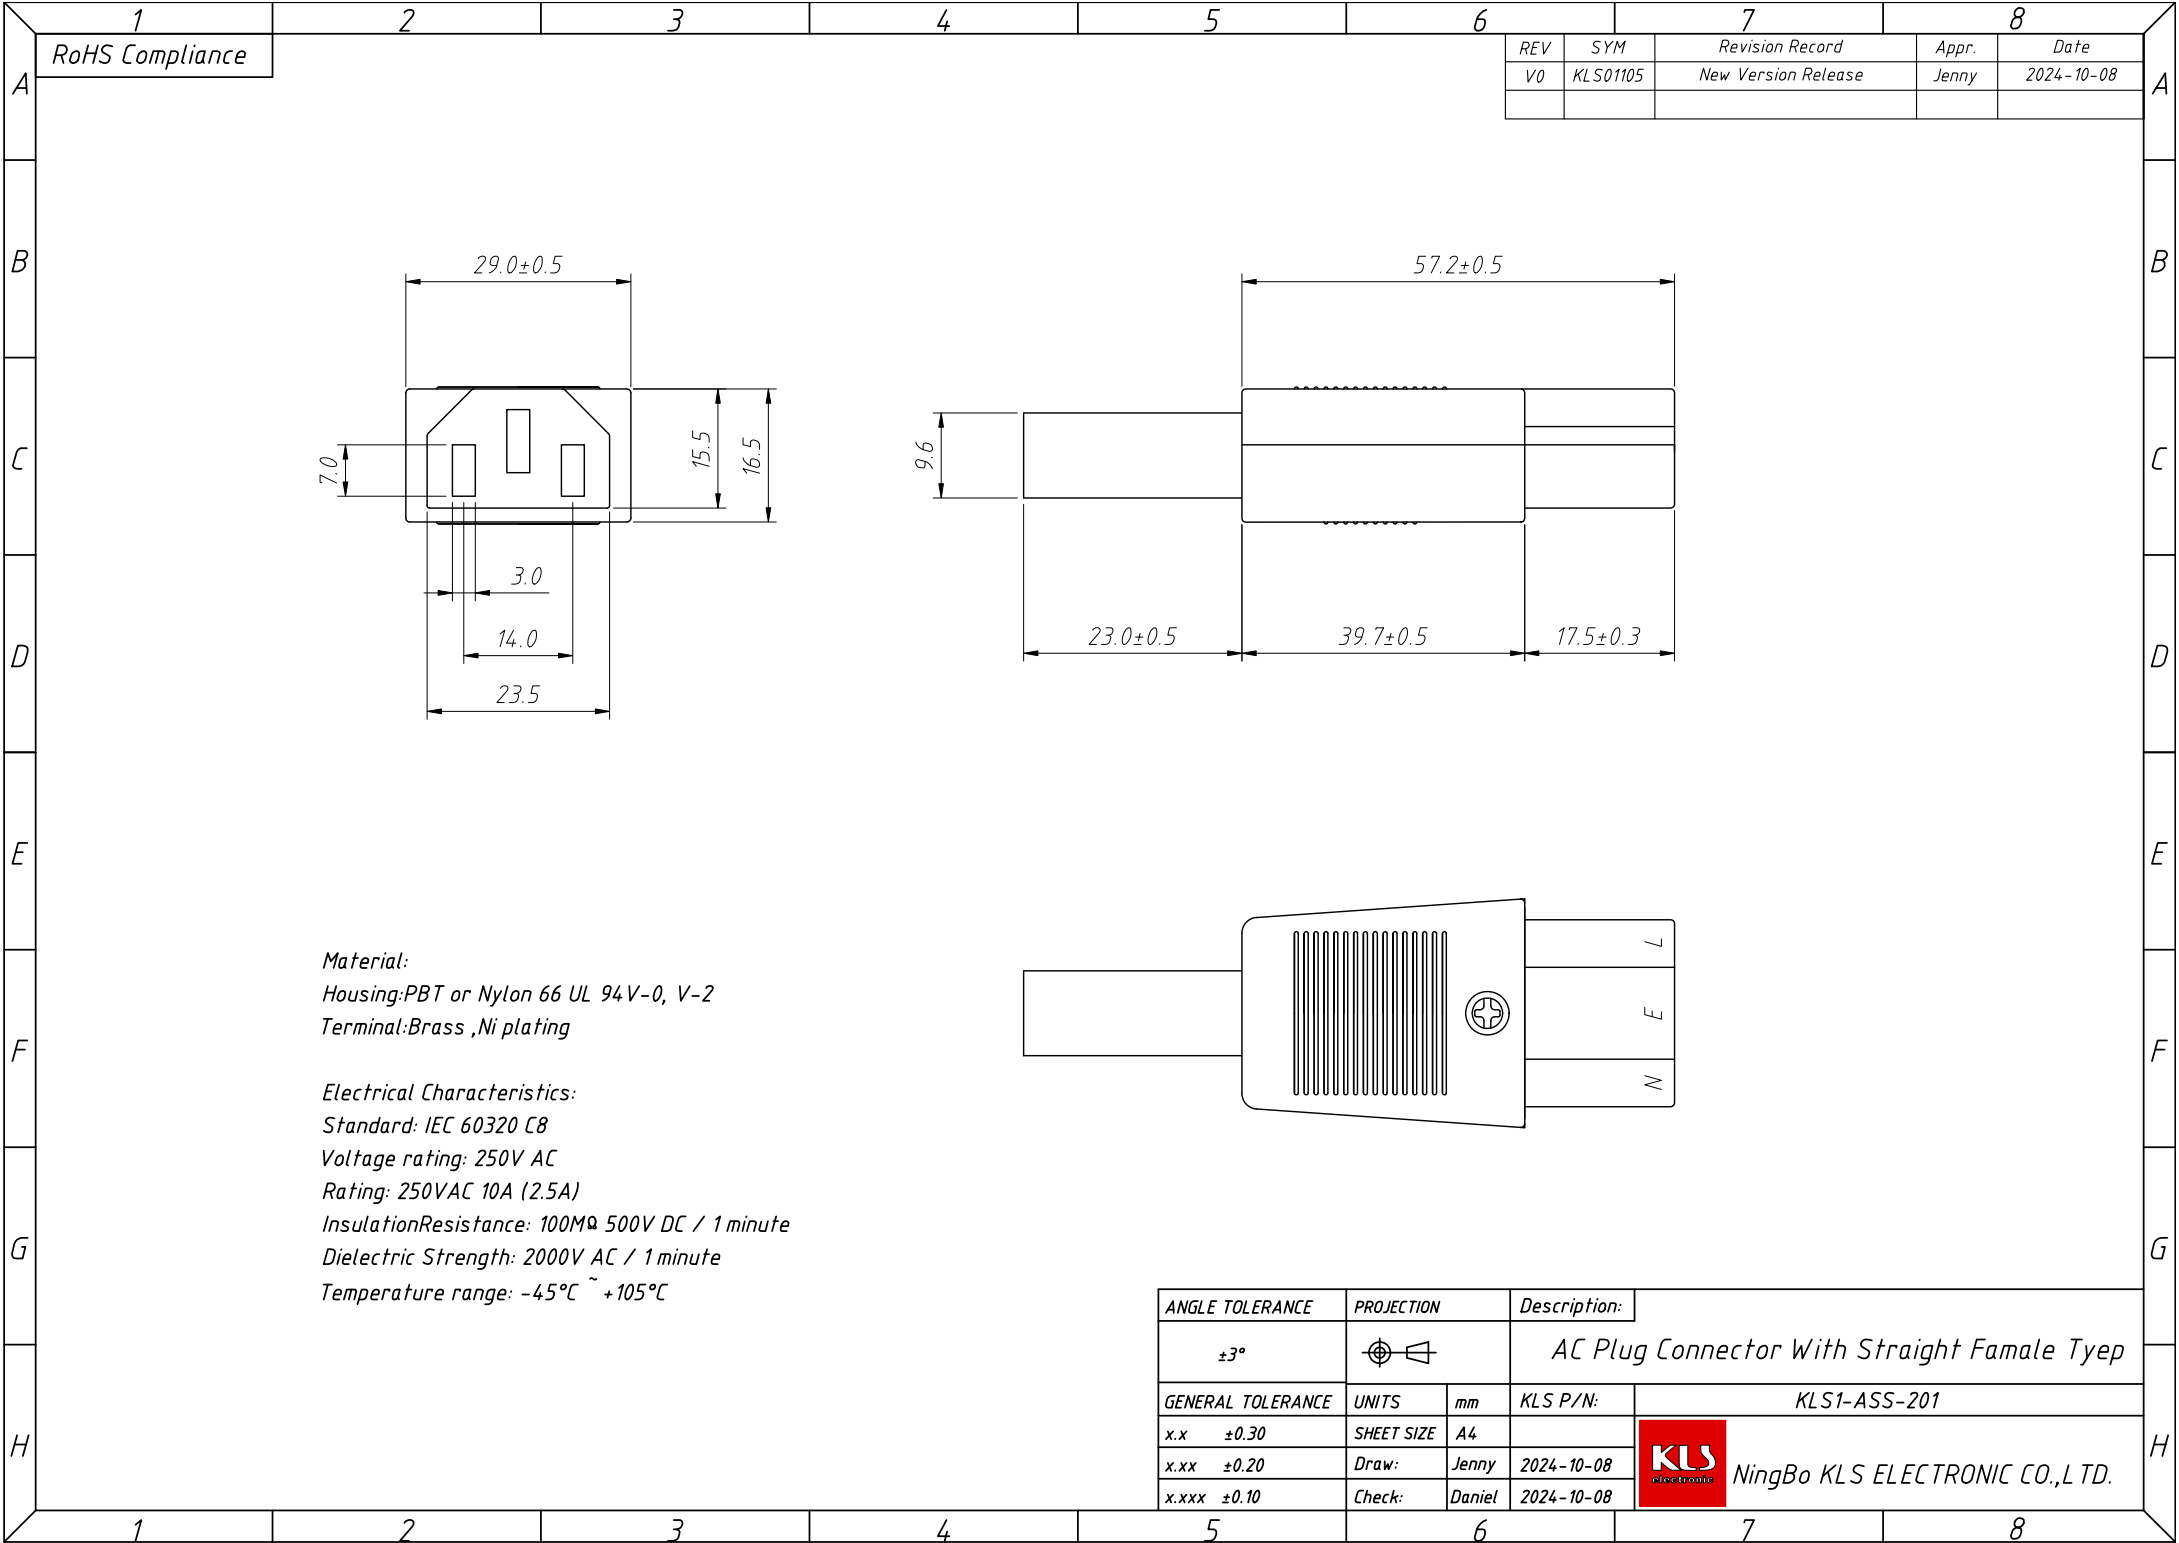


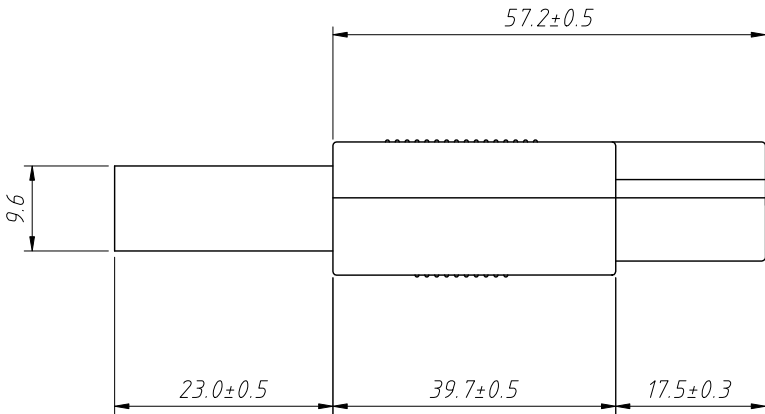


RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01105	New Version Release	Jenny	2024-10-08

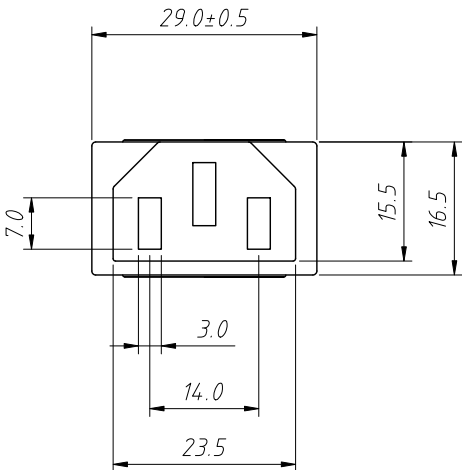

Material:
Housing:PBT or Nylon 66 UL 94V-0, V-2
Terminal:Brass ,Ni plating

Electrical Characteristics:
Standard: IEC 60320 C8
Voltage rating: 250V AC
Rating: 250VAC 10A (2.5A)
InsulationResistance: 100MΩ 500V DC / 1 minute
Dielectric Strength: 2000V AC / 1 minute
Temperature range: -45°C ~ +105°C

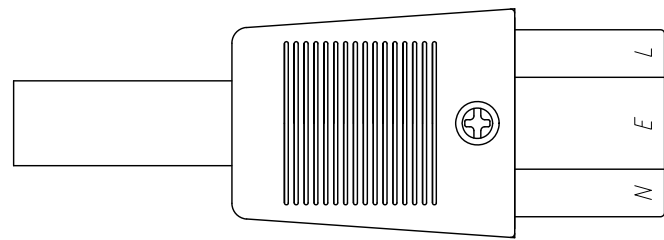

ANGLE TOLERANCE	PROJECTION	Description:
±3°		AC Plug Connector With Straight Famale Tyep
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	Jenny
x.xxx ±0.10	Check:	Daniel

KLS1-P/N:	KLS1-ASS-201
2024-10-08	2024-10-08
2024-10-08	2024-10-08

NingBo KLS ELECTRONIC CO.,L TD.