


Material:
Housing: Nylon 66, UL 94V-2 or 94V-0

Electrical:
Rating: 10A 250VAC
Insulator Resistance: DC 500V 100M Ω Min.
Dielectric Strength: AC 2000V 1Minute.
Operating Temperature: $-45^{\circ}\text{C} \sim +105^{\circ}\text{C}$

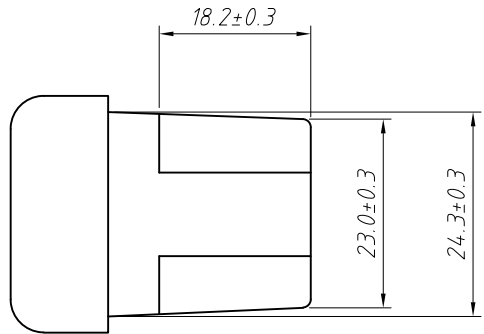

GENERAL TOLERANCE	PROJECTION		Description:
X. ± 0.50	UNITS	mm	AC power plug connectors
.X ± 0.25	SCALE	1:1	
.XX ± 0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS P/N: L-KLS1-ASS-204
X. $\pm 5^{\circ}$	Date	2018-03-01	NingBo KLS ELECTRONIC CO.,L TD.
.X $\pm 3^{\circ}$	SHEET	1 OF 1	
.XX $\pm 2^{\circ}$			