

Stereo Jack Series

KLS1-TSJ3.5-009 (Dip Stereo Jack)

Technical parameters:





Rated voltage: DC 30 V
Rated current: 0.5 A
Contact resistance: 0.03Ω, max
Insulation resistance: 100MΩ, min
Pressure: AC500V (50Hz) / 1minute
Insertion Force :2-20 N
Life: 50000 times
Operating Temperature:-30℃ ~ 70℃

Material:

Terminal 1 : Copper Alloy
Terminal 2 : Copper Alloy
Terminal 3 : Copper Alloy
Housing : PBT



I

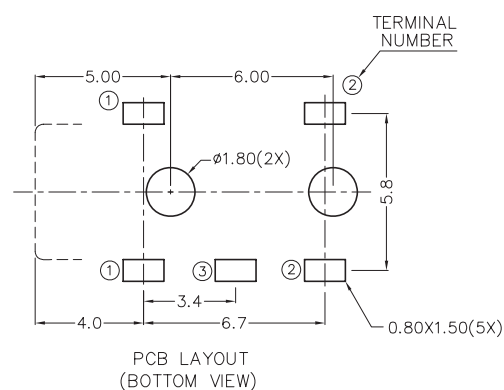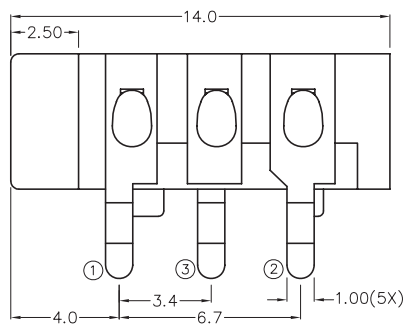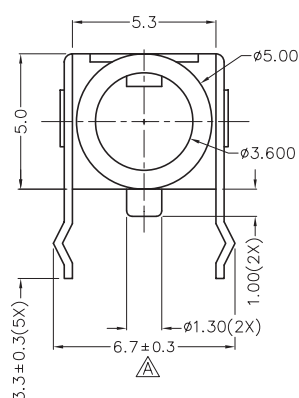

MODEL NO.	TSJ3.5-009
SCHEMATIC	

ORDER INFORMATION

Product NO.: KLS1-TSJ3.5-009

Pos. NO. ———
3.5mm Dip Stereo Jack ———